


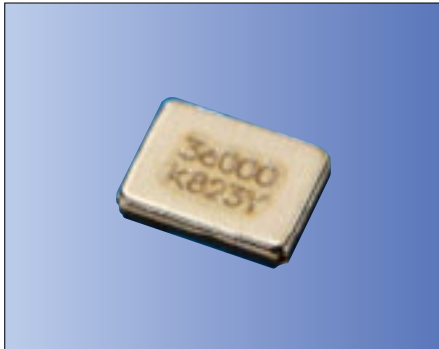

RoHS Compliant

Features

- Crystal unit for Consumer Products
- Ultra-miniature and low profile (1.6×1.2×0.3mm)
- Ceramic package
- Reflow compatible

Applications

- Digital Electronics
- Consumer Products
- 1seg. tuner

How to Order

CX1612SB 36000 ☐ ☐ ☐ ☐ ☐ ☐

- ① Series ② Frequency
③ Load Capacitance ④ Frequency Stability
- | | | | | | |
|----|------|------|---|-------------------------|------|
| B0 | 6 pF | — | G | $\pm 15 \times 10^{-6}$ | Std. |
| D0 | 8 pF | Std. | | | |
- ⑤ Operating Temp. Range ⑥ Frequency Temp. Stability
- | | | | |
|----|--------------|-------------------------|------|
| EJ | -10 to +70°C | $\pm 15 \times 10^{-6}$ | Std. |
|----|--------------|-------------------------|------|
- ⑦ Individual Specification

Packaging (Tape & Reel 3000/ 1000 pcs./ reel)

Specifications

Item	Symbol	Specification	Units	Remarks
Frequency Range	f _{nom}	26000 to 60000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	
Frequency Stability	f _{tol}	±15	$\times 10^{-6}$	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T _{use}	-10 to +70	°C	
Storage Temp. Range	T _{stg}	-40 to +85	°C	
Frequency Temp. Characteristics	f _{tem}	±15	$\times 10^{-6}$	Freq. deviation from the value at 25°C

• Please contact us for other specifications.

Typical Frequencies and Part Numbers

Frequency (kHz)	Part Number
32000.000	CX1612SB32000D0GEJZ1
36000.000	CX1612SB36000D0GEJZ1
38400.000	CX1612SB38400D0GEJZ1
40000.000	CX1612SB40000D0GEJZ1
48000.000	CX1612SB48000D0GEJZ1

Table1 Motional Series Resistance


Frequency Range	Motional Series Resistance
26000 to 39999kHz	150Ω max.
40000 to 49999kHz	100Ω max.
50000 to 60000kHz	50Ω max.

Table2 Level of Drive

Frequency Range	Level of Drive
26000 to 60000kHz	10μW (100μW max.)

Dimensions

(Unit: mm)

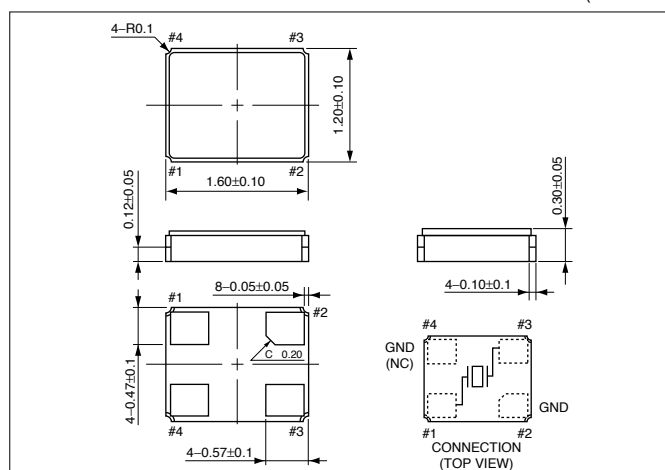

Recommended Land Pattern

(Unit: mm)

