3.5x2.8x1.9mm Red & Yellow Green SMD LED
OSRGH4S2C1A

▪Features

- High Luminous PLCC4 Top SMD LEDs
- 3.5x2.8x1.9mm Standard Directivity
- Superior Weather-resistance
- UV Resistant Epoxy
- Water Clear Type

▪Outline Dimension

▪Applications


- Toys
- Audio
- Games
- Other Lighting

▪Absolute Maximum Rating (Ta=25℃)

Item	Symbol	Value		Unit
		Red	YG	
DC Forward Current	I_F	30	30	mA
Pulse Forward Current*	I_{FP}	100	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	72	72	mW
Operating Temperature	Topr	-30 ~ +85		℃
Storage Temperature	Tstg	-40~ +100		℃
Lead Soldering Temperature	Tsol	260℃/5sec		-

*Pulse width Max.10ms Duty ratio max 1/10

▪Directivity

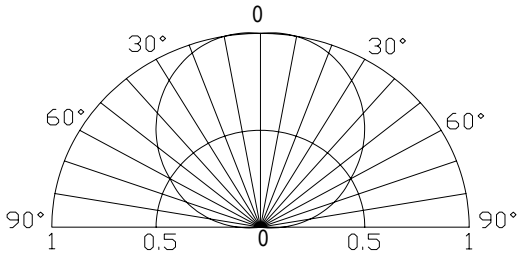

▪Electrical -Optical Characteristics (Ta=25℃)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V_F (Red)	I_F=20mA	1.8	2.1	2.4	V
	V_F (YG)	I_F=20mA	1.8	2.1	2.4	V
DC Reverse Current	I_R	V_R=5V	-	-	10	μA
Domi. Wavelength*	λ_D(Red)	I_F=20mA	620	625	630	nm
	λ_D(YG)	I_F=20mA	565	570	575	nm
Luminous Intensity*	Iv(Red)	I_F=20mA	-	150	-	mcd
	Iv(YG)	I_F=20mA	-	60	-	mcd
50% Power Angle	$2\theta_{1/2}$	I_F=20mA	-	120	-	deg

*1 Tolerance of dominant wavelength is ±1nm
*2 Tolerance of luminous intensity is ±15%