

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 150 to 200 Volts CURRENT 5.0 Ampere

FEATURES

- * High reliability
- * Low switching loss
- * Low forward voltage drop
- * High current capability
- * High switching capability
- * RoHS product for packing code suffix "G"
- Halogen free product for packing code suffix "H"

MECHANICAL DATA


- * Epoxy: Device has UL flammability classification 94V-O
- * Case: Molded plastic
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting: position: Any
- * Weight: 1.19 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.



DO-201AD

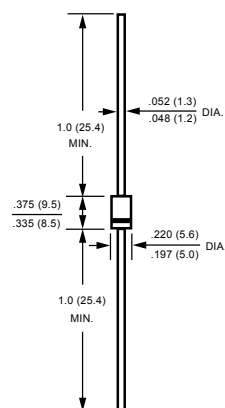

MAXIMUM RATINGS (@ TA=25 °C unless otherwise noted)

RATINGS	SYMBOL	SR5150	SR5200	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	150	200	Volts
Maximum RMS Voltage	V _{RMS}	105	140	Volts
Maximum DC Blocking Voltage	V _{DC}	200	200	Volts
Maximum Average Forward Rectified Current at Derating Lead Temperature	I _O	5.0		Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	150		Amps
Typical Thermal Resistance (Note 1)	R _{θJA}	25		°C/W
	R _{θJL}	8		
Typical Junction Capacitance (Note 3)	C _J	350		pF
Operating Temperature Range	T _J	-55 to + 150		°C
Storage Temperature Range	T _{STG}	-55 to + 150		°C

ELECTRICAL CHARACTERISTICS (@TA=25 °C unless otherwise noted)

CHARACTERISTICS		SYMBOL	SR5150	SR5200	UNITS
Maximum Instantaneous Forward Voltage at 5.0A DC		V _F	0.87	0.90	Volts
Maximum Average Reverse Current at Rated DC Blocking Voltage	@T _A = 25°C	I _R	0.2		mA
	@T _A = 100°C		10		mA

NOTES : 1. Thermal Resistance : At 9.5mm lead lengths, PCB mounted.
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
3. "Fully ROHS compliant", "100% Sn plating (Pb-free)".

RATING AND CHARACTERISTICS CURVES (SR5150 THRU SR5200)

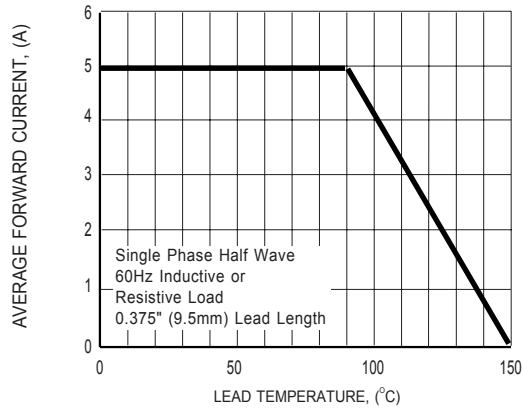


FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE

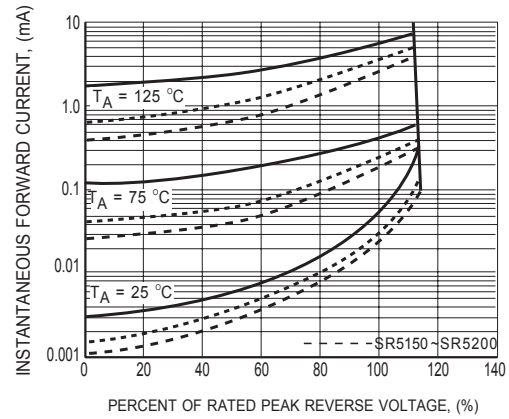


FIG.2 TYPICAL REVERSE CHARACTERISTICS

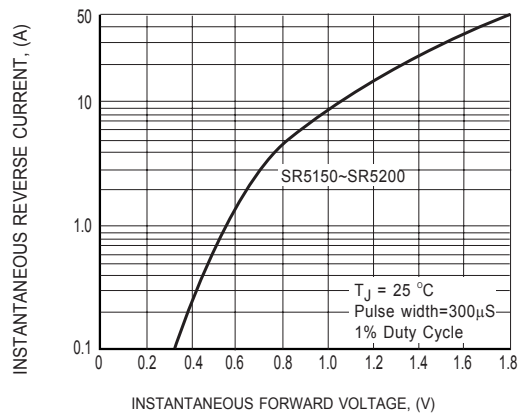


FIG.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

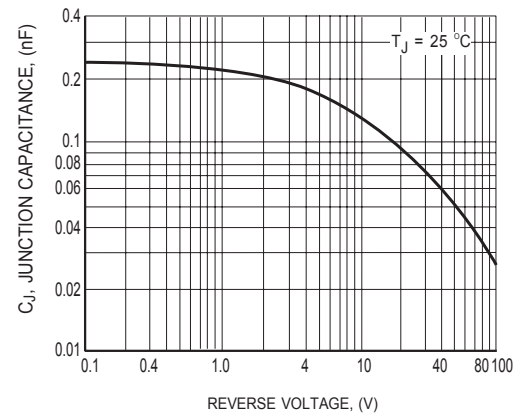


FIG.4 TYPICAL JUNCTION CAPACITANCE

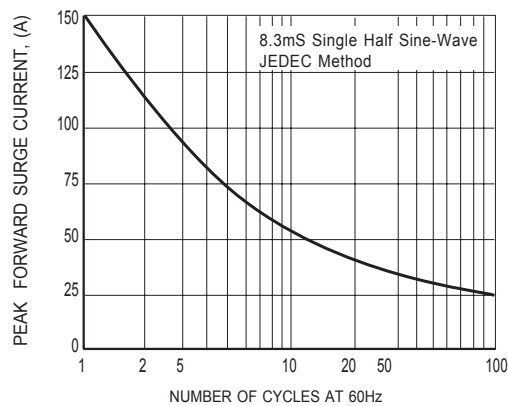


FIG.5 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT