

FEATURES

- ▶ Industrial Standard DIP-24 Package
- ▶ Wide 2 :1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ Ultra-high I/O Isolation 8000VDC
- ▶ Common Mode Transient Immunity: 15KV/μs
- ▶ Qualified for IGBT and High Isolation Applications
- ▶ Operating Temp. Range -40°C to +85°C
- ▶ Overload and Short Circuit Protection
- ▶ Conducted EMI meets EN55022 Class A & FCC Level A
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval



PRODUCT OVERVIEW

The MINMAX MIE03-HI series is a new range of isolated 3W DC/DC converter modules in DIP-24 package which feature a wide input range, fully regulated output and Ultra-high I/O Isolation voltage rated for 8000VDC with reinforced insulation. A very high common mode transient immunity with 15KV/μs qualifies these product for IGBT driver applications. Further features include over load protection, short circuit protection and EN55022 class A compliant as well.

There are 20 Models available for 5, 12, 24 and 48VDC input. These converters offer a cost-effective solution for wind turbine, solar panel, transportation systems, industrial control equipments and some IGBT driver applications where a very high I/O-isolation is required.

Model Selection Guide

| Model Number | Input Voltage (Range) VDC | Output Voltage VDC | Output Current | | Input Current | | Reflected Ripple Current mA (typ.) | Max. capacitive Load μF | Efficiency (typ.) @Max. Load % |
|---------------|------------------------------|-----------------------|----------------|------------|-------------------------|-----------------------|---------------------------------------|----------------------------|--------------------------------------|
| | | | Max. mA | Min. mA | @Max. Load mA (typ.) | @No Load mA (typ.) | | | |
| MIE03-05S05HI | 5 (4.5 ~ 9) | 5 | 600 | 90 | 870 | 40 | 60 | 1000 | 69 |
| MIE03-05S12HI | | 12 | 250 | 37.5 | 811 | | | 470 | 74 |
| MIE03-05S24HI | | 24 | 125 | 18.8 | 800 | | | 470 | 76 |
| MIE03-05D12HI | | ±12 | ±125 | ±18.8 | 800 | | | 220# | 75 |
| MIE03-05D15HI | | ±15 | ±100 | ±15 | 800 | | | 220# | 75 |
| MIE03-12S05HI | 12 (9 ~ 18) | 5 | 600 | 90 | 342 | 30 | 30 | 1000 | 73 |
| MIE03-12S12HI | | 12 | 250 | 37.5 | 316 | | | 470 | 79 |
| MIE03-12S24HI | | 24 | 125 | 18.8 | 313 | | | 470 | 81 |
| MIE03-12D12HI | | ±12 | ±125 | ±18.8 | 313 | | | 220# | 80 |
| MIE03-12D15HI | | ±15 | ±100 | ±15 | 313 | | | 220# | 80 |
| MIE03-24S05HI | 24 (18 ~ 36) | 5 | 600 | 90 | 162 | 20 | 15 | 1000 | 77 |
| MIE03-24S12HI | | 12 | 250 | 37.5 | 152 | | | 470 | 82 |
| MIE03-24S24HI | | 24 | 125 | 18.8 | 151 | | | 470 | 84 |
| MIE03-24D12HI | | ±12 | ±125 | ±18.8 | 151 | | | 220# | 83 |
| MIE03-24D15HI | | ±15 | ±100 | ±15 | 151 | | | 220# | 83 |
| MIE03-48S05HI | 48 (36 ~ 75) | 5 | 600 | 90 | 81 | 10 | 10 | 1000 | 77 |
| MIE03-48S12HI | | 12 | 250 | 37.5 | 76 | | | 470 | 82 |
| MIE03-48S24HI | | 24 | 125 | 18.8 | 75 | | | 470 | 84 |
| MIE03-48D12HI | | ±12 | ±125 | ±18.8 | 75 | | | 220# | 83 |
| MIE03-48D15HI | | ±15 | ±100 | ±15 | 75 | | | 220# | 83 |

For each output

Input Specifications

| Parameter | Model | Min. | Typ. | Max. | Unit |
|-----------------------------------|------------------|--|------|------|------|
| Input Surge Voltage (1 sec. max.) | 5V Input Models | -0.7 | --- | 11 | VDC |
| | 12V Input Models | -0.7 | --- | 25 | |
| | 24V Input Models | -0.7 | --- | 50 | |
| | 48V Input Models | -0.7 | --- | 100 | |
| Start-Up Threshold Voltage | 5V Input Models | 3.7 | 4 | 4.5 | |
| | 12V Input Models | 8 | 8.5 | 9 | |
| | 24V Input Models | 15 | 17 | 18 | |
| | 48V Input Models | 30 | 33 | 36 | |
| Under Voltage Shutdown | 5V Input Models | --- | --- | 4 | |
| | 12V Input Models | --- | --- | 8.5 | |
| | 24V Input Models | --- | --- | 17 | |
| | 48V Input Models | --- | --- | 34 | |
| Short Circuit Input Power | All Models | --- | --- | 2000 | mW |
| Conducted EMI | | Compliance to EN 55022, class A and FCC part 15, class A | | | |

Output Specifications

| Parameter | Conditions | Min. | Typ. | Max. | Unit | |
|---------------------------------|-----------------------------|---------------------|-------|-------|--------|-------------------|
| Output Voltage Setting Accuracy | | --- | --- | ±1.0 | %Vnom. | |
| Output Voltage Balance | Dual Output, Balanced Loads | --- | ±0.5 | ±2.0 | % | |
| Line Regulation | Vin=Min. to Max. @Full Load | --- | ±0.3 | ±0.5 | % | |
| Load Regulation | Io=25% to 100% | --- | ±0.5 | ±1.0 | % | |
| Ripple & Noise | 0-20 MHz Bandwidth | 5V Output Models | --- | 75 | 100 | mV _{P-P} |
| | | Other Output Models | --- | 100 | 150 | mV _{P-P} |
| Transient Recovery Time | 25% Load Step Change | --- | 150 | 500 | μsec | |
| Transient Response Deviation | | --- | ±3 | ±6 | % | |
| Temperature Coefficient | | --- | ±0.02 | ±0.05 | %/°C | |
| Over Load Protection | Foldback | 120 | 150 | --- | % | |
| Short Circuit Protection | | Continuous | | | | |

Isolation, Safety Standards


| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------|---|------|------|------|--------|
| I/O Isolation Voltage | Rated for 60 seconds | 4000 | --- | --- | VACrms |
| | Tested for 1 second | 8000 | --- | --- | VDC |
| I/O Isolation Resistance | 500 VDC | 10 | --- | --- | GΩ |
| I/O Isolation Capacitance | 100KHz, 1V | --- | 7 | 13 | pF |
| Common Mode Transient Immunity | | 15 | --- | --- | KV/μs |
| Safety Approvals | UL/cUL 60950-1 recognition(UL certificate), IEC/EN 60950-1(CB-report) | | | | |

General Specifications


| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------|-----------------------------------|-----------|------|------|-------|
| Switching Frequency | | --- | 150 | --- | KHz |
| MTBF(calculated) | MIL-HDBK-217F@25°C, Ground Benign | 1,000,000 | | | Hours |

Environmental Specifications

| Parameter | Conditions | Min. | Max. | Unit |
|---|--------------------|------|------|----------|
| Operating Ambient Temperature Range (See Power Derating Curve) | Natural Convection | -40 | +85 | °C |
| Case Temperature | | --- | +100 | °C |
| Storage Temperature Range | | -50 | +125 | °C |
| Humidity (non condensing) | | --- | 95 | % rel. H |
| Cooling | Natural Convection | | | |
| Lead Temperature (1.5mm from case for 10Sec.) | | --- | 260 | °C |

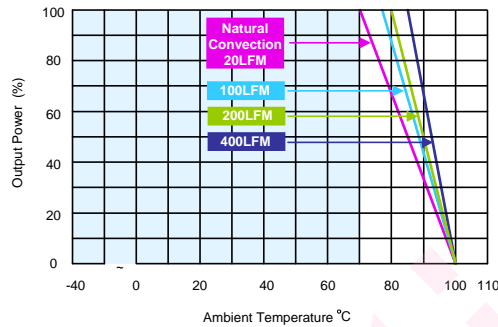Power Derating Curve

Notes

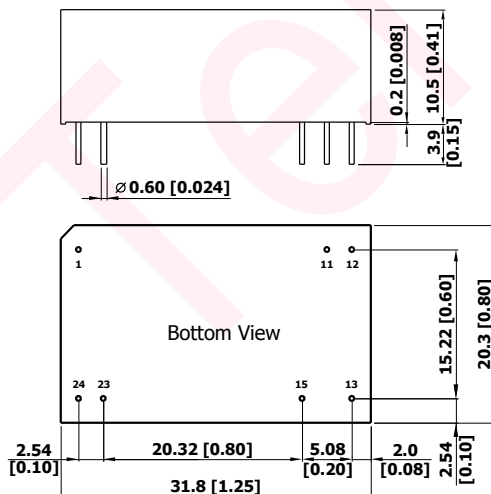- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however, they may not meet all specifications listed.
- 4 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 5 Other input and output voltage may be available, please contact factory.
- 6 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 7 Specifications are subject to change without notice.

Package Specifications
Mechanical Dimensions

Pin Connections

| Pin | Single Output | Dual Output |
|-----|---------------|-------------|
| 1 | +Vin | +Vin |
| 11 | No Pin | Common |
| 12 | -Vout | No Pin |
| 13 | +Vout | -Vout |
| 15 | No Pin | +Vout |
| 23 | -Vin | -Vin |
| 24 | -Vin | -Vin |

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pins ±0.05(±0.002)


Physical Characteristics

| | |
|---------------|---|
| Case Size | : 31.8x20.3x10.5mm (1.25x0.8x0.41 inches) |
| Case Material | : Non-Conductive Black Plastic (flammability to UL 94V-0 rated) |
| Pin Material | : Copper Alloy with Gold Plate Over Nickel Subplate |
| Weight | : 16.2g |

Test Setup



Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} (4.7 μ H) and C_{in} (220 μ F, ESR < 1.0 Ω at 100 KHz) to simulate source impedance. Capacitor C_{in} , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

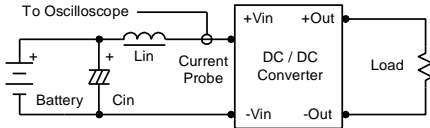

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

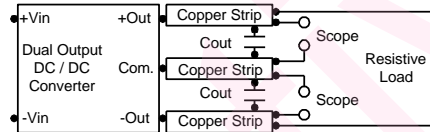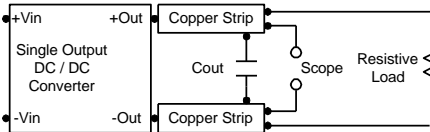


Technical Notes

Overload Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.



Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 10 μ F for the 5V input devices and a 4.7 μ F for the 12V input devices and 2.2 μ F for the 24V and 48V devices.

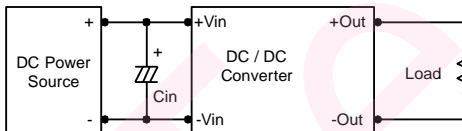

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

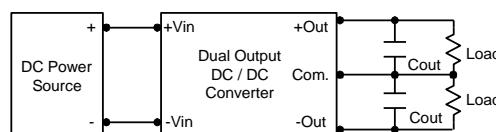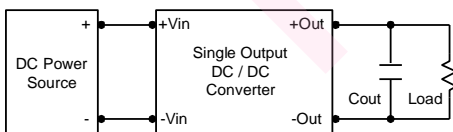

Maximum Capacitive Load

The MIE03-HI series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. Connect capacitors at the point of load for best performance. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 100 $^{\circ}$ C. The derating curves are determined from measurements obtained in a test setup.