


SS-12F68-GXXX  
直柄 G-Switch P/N

- G=020 (2.0) G=030 (3.0)
- G=040 (4.0) G=050 (5.0)
- G=055 (5.5) G=060 (6.0)
- G=065 (6.5) G=070 (7.0)
- G=075 (7.5) G=080 (8.0)
- G=085 (8.5) G=090 (9.0)
- G=095 (9.5) G=100 (10.0)

G-Switch Specification:  
 RATING (额定值) : DC250V 0.5A  
 CONTACT RESISTANCE 接触电阻:  $\leq 70m\Omega$   
 INSULATION RESISTANCE 绝缘电阻:  $\geq 100m\Omega$   
 DIELECTRIC STRENGTH 耐电压: AC 500V for 1 minute  
 TIMING (时间特性) : SHORTING

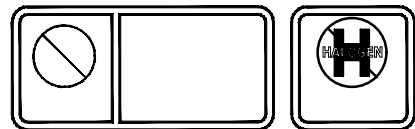

<p>Unless otherwise specified, Tolerance:          X. <math>\pm 0.30</math>          X.x <math>\pm 0.20</math>          X.xx <math>\pm 0.15</math>          X.xxx <math>\pm 0.10</math>          Angles <math>\pm 3'</math></p>	<b>G-Switch Electronic Technology CO.,Ltd.</b>			
	DESIGN 陈锋枫	DATE 2016.05.29	TITLE:	
	CHECKED	DATE	SS-12F68-GXXX	
	APPROVED	DATE		
<a href="http://www.dg-switch.com">http://www.dg-switch.com</a>		REV.: X1	SCALE: 4:1	UNIT: mm
TEL:0769-82388879		SIZE: A4	SHEET: 1/1	