

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Turns Ratio (± 5%)

1:2CT & 1:2CT

| PARAMETER | MIN. | MAX. | UNITS |
|--------------------------------|------|------|-------|
| OCL (Primary) | 1.5 | | mH |
| Leakage Inductance | | 0.5 | μH |
| Capacitance (C _{ww}) | | 35 | pF |
| Primary DC Resistance | | 0.7 | ohms |
| Secondary DC Resistance | | 1.4 | ohms |
| ET Product | 10 | | VμS |

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500 V_{RMS} Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 21 pieces per tube


Tape and Reel available

Primary Pins 14-12 & 5-7

PHYSICAL DIMENSIONS All dimensions in inches (mm):

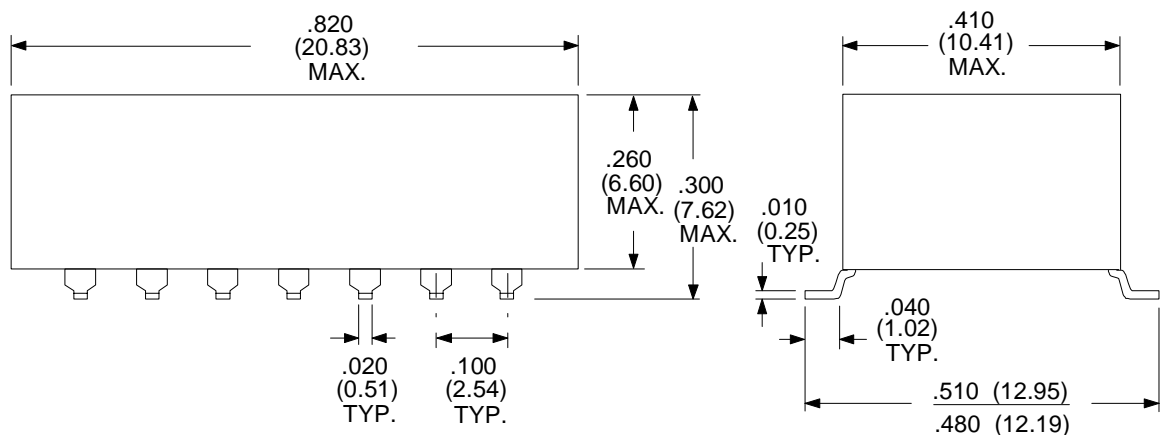

SCHEMATIC DIAGRAM:

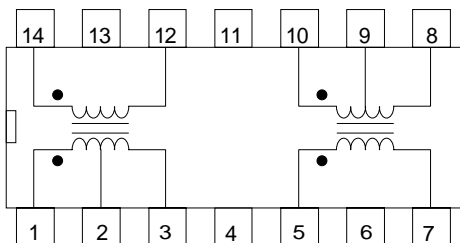

RHOMBUS P/N: **T-11048**

CUST P/N:

NAME:

DATE: **2/23/98**

SHEET: 1 OF 1