Rising clamp terminal block




TECHNICAL DATA

	IEC	UL / CSA
Pitch	3.81 mm	0.15"
Poles	2, 3	
Versions	VE vertical	
Ratings	125V - 13.5A	125V - 10A
Wire size	1.0 sqmm	22 ÷ 16 AWG
Working Temperature	-5 ÷ 85 °C (short time 125 °C)	23 ÷ 221 °F
Plastic Material	Green Polyamide PA6.8, UL94-V0, CTI600V, GWT960 °C	
Metal Parts	Soldering pin made in tin plated brass; Cage insert made in nickel plated brass; M2 Screw made in zinc plated steel	
Screw Torque	0.5 N.m	7 lb-in
Accessories		

Approvals	File Nr.	Ratings (sqmm/AWG – V – A – T)	Standard References
	EI 629	1.0sqmm - 125V - 13.5A - T85 °C	EN60998-1; EN60998-2-1
	5699 ÜG	1.0sqmm - 125V - 13.5A - T85 °C	DIN EN60998-1; DIN EN60998-2-1 (VDE 0613)
	PENDING	22 ÷ 16AWG - 125V - 10A - 105 °C	

DIMENSIONAL DRAWING

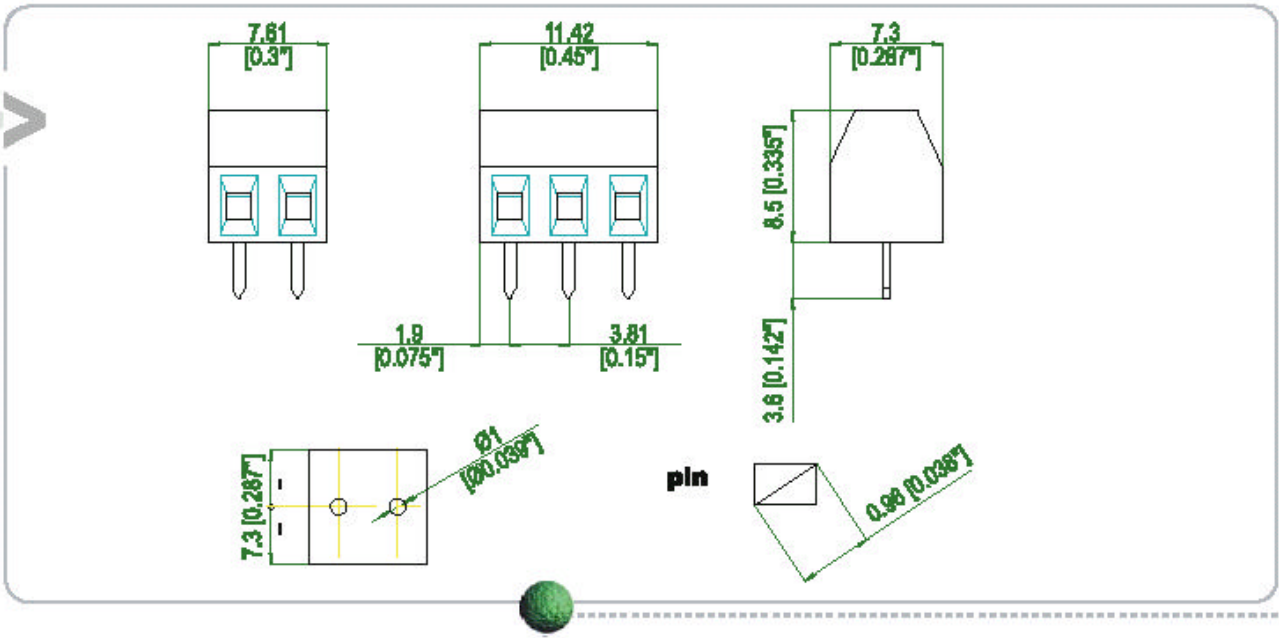

Diamond Electronics Ltd TECHNICAL COMPONENT DISTRIBUTION