



SURFACE MOUNT SCHOTTKY BRIDGE RECTIFIERS

Forward Current :1.0A

Reverse Voltage : 40V to 200V

FEATURES

- ◆ Reverse Voltage : 40 to 200 V
- ◆ Forward Current : 1 A
- ◆ High Surge Current Capability
- ◆ Designed for Surface Mount Application

MECHANICAL DATA

- ◆ Case: MBF
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 75mg

PINNING

| PIN | DESCRIPTION |
|-----|----------------------|
| 1 | Input Pin (~) |
| 2 | Input Pin (~) |
| 3 | Output Anode (+) |
| 4 | Output Cathode (-) |



MBF Package

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

| PARAMETER | SYMBOL | MB14F-PJ | MB16F-PJ | MB18F-PJ | MB110F-PJ | MB115F-PJ | MB120F-PJ | UNIT |
|---|--------------------|----------|----------|-------------|-----------|-----------|-----------|------|
| Maximum Repetitive Peak Reverse Voltage | V _{RRM} | 40 | 60 | 80 | 100 | 150 | 200 | V |
| Maximum RMS Voltage | V _{RMS} | 28 | 42 | 56 | 70 | 105 | 140 | V |
| Maximum DC Blocking Voltage | V _{DC} | 40 | 60 | 80 | 100 | 150 | 200 | V |
| Maximum Average Forward Rectified Current at T _C =100°C | I _{F(AV)} | | | | 1.0 | | | A |
| Peak Forward Surge Current ^(Note1) | I _{FSM} | | 40 | | | 30 | | A |
| Maximum Forward Voltage at 1.0A | V _F | 0.55 | 0.70 | | 0.85 | 0.9 | | V |
| Maximum DC Reverse Current at Rated DC Blocking Voltage at T _C =25°C at T _C =100°C | I _R | | 0.3 | | 0.2 | 0.1 | | µA |
| Typical Junction Capacitance ^(Note2) | C _J | 110 | | | 80 | | | pF |
| Typical Thermal Resistance ^(Note3) | R _{θJA} | | | 100 | | | | °C/W |
| Operating Junction Temperature Range | T _J | | | -55 to +125 | | | | °C |
| Storage Temperature Range | T _{STG} | | | -55 to +150 | | | | °C |

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at 1MHz and applied reverse voltage of 4 V D C.

3. Mounted on 4 X 1.5" X 1.5" (3.81 X 3.81 cm) copper pad areas.



RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

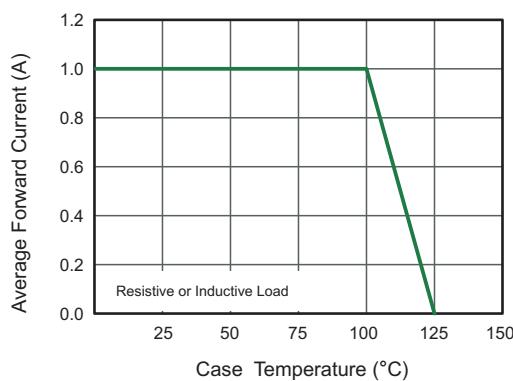


Fig.2 Typical Reverse Characteristics

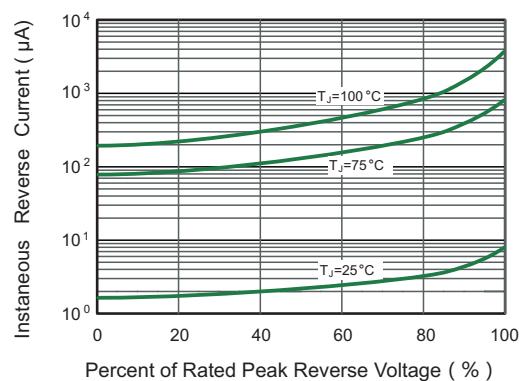


Fig.3 Typical Instantaneous Forward Characteristics

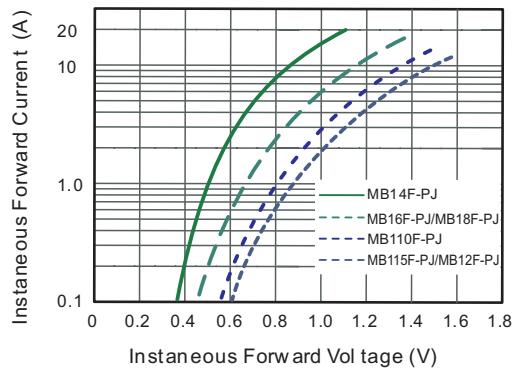


Fig.4 Typical Junction Capacitance

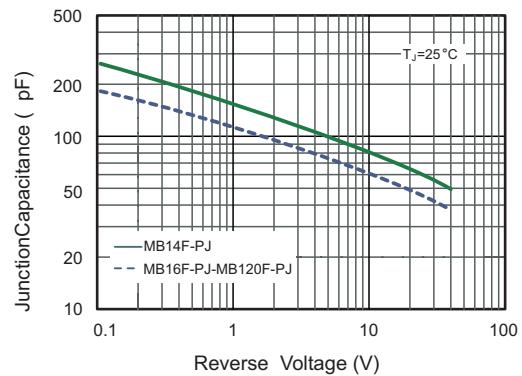


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


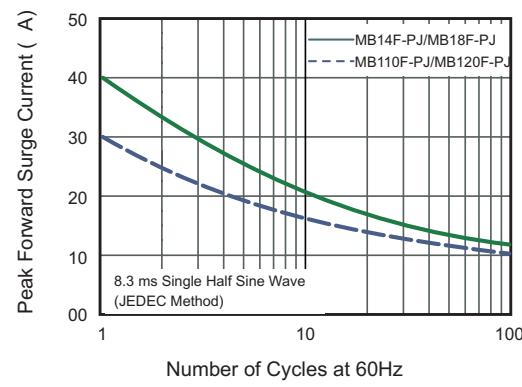



Fig.6- Typical Transient Thermal Impedance



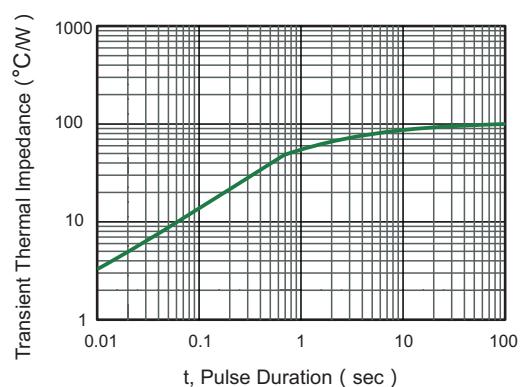

PACKAGE OUTLINE

MBF

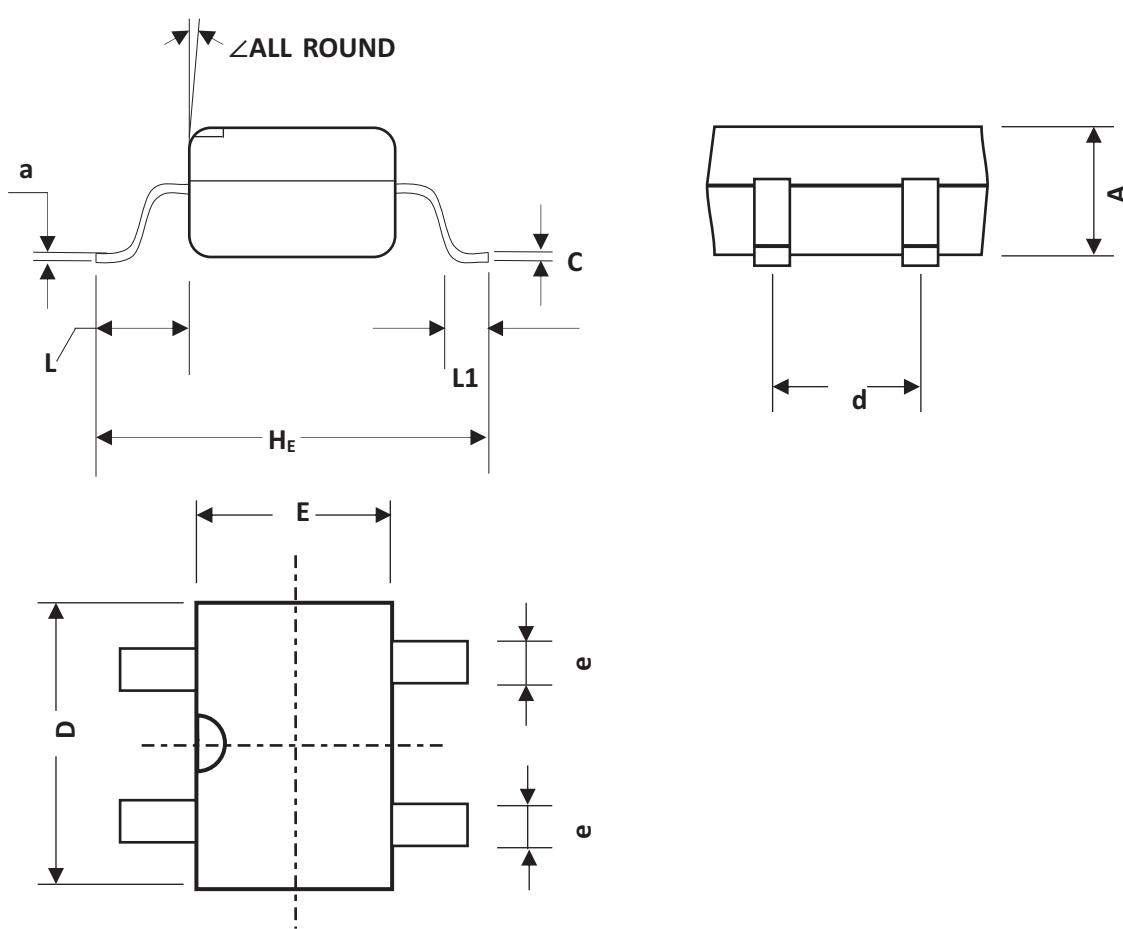

MBF mechanical data

| UNIT | | A | C | D | E | H _E | d | e | L | L ₁ | a | < |
|------|-----|-----|------|-----|-----|----------------|-----|-----|-----|----------------|-----|----|
| mm | max | 1.6 | 0.22 | 5.0 | 4.1 | 7.0 | 2.7 | 0.8 | 1.7 | 1.1 | 0.2 | 7° |
| | min | 1.2 | 0.15 | 4.5 | 3.6 | 6.4 | 2.3 | 0.5 | 1.3 | 0.5 | — | |
| mil | max | 63 | 8.7 | 197 | 161 | 276 | 106 | 31 | 67 | 43 | 8 | 7° |
| | min | 47 | 5.9 | 177 | 142 | 252 | 91 | 20 | 51 | 20 | — | |

ORDERING INFORMATION

| Device | Package | Shipping |
|-------------------------|---------|-------------------------------|
| MB14F-PJ thru MB120F-PJ | MBF | 3,000/Tape & Reel (11 inches) |
| | | 5,000/Tape & Reel (13 inches) |