


1. Mechanical Dimensions:


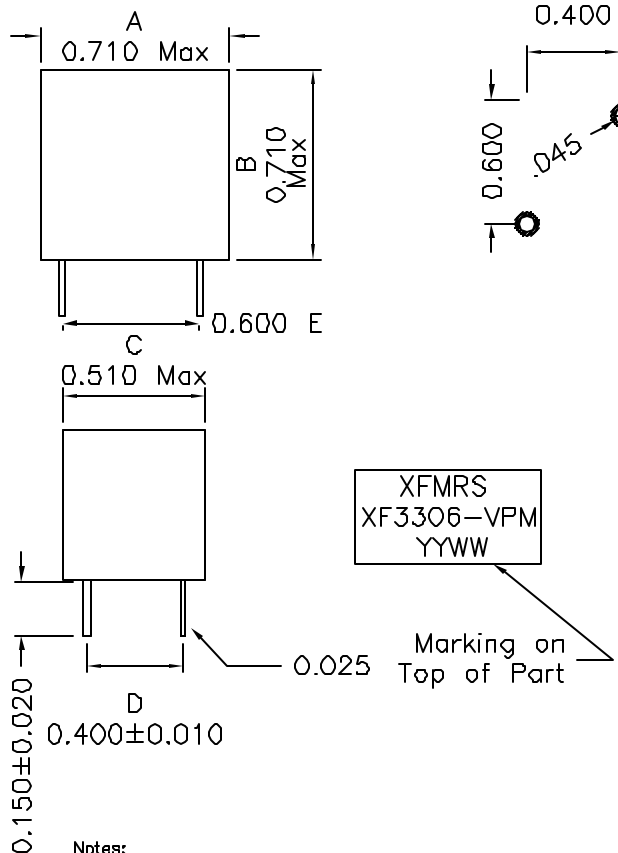


Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen Index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV A/1

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 330uH ±15% @10KHz 1.0V
 Rated Current: 1.0Adc
 DC Resistance: 0.780 Ohms Max
 ETop: 100 V-uS Max
 Energy Storage: 165uJ

XFMRS Inc www.XFMRS.com	Title: POTTED INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH		P/N: XF3306-VPM
SHEET 1 OF 1	DWN.	廖玉坤	Jan-22-07
	CHK.	李清儿	Jan-22-07
	APP.	BW	Jan-22-07