Features

- X2 class capacitor RE series with insulated flexible wire leads.
- Two types of wire (single wire type & multiple wire type).
- UL, CSA(C-UL), IEC60384-14II(class X2).
- RoHS restriction compliant.


Safety Agency : Standard	File No.
UL : UL-1414	E236227
C-UL : C22.2 No.1	E236227
SEMKO-ENEC : IEC60384-14 II EN132400	401389

The "ENCE" mark is a common European product certification mark based on testing to harmonized European safety standard.
The mark with #14 stands for SEMKO.

Applications


- Industrial machinary, Electric appliances and Lighting.

Dimensions

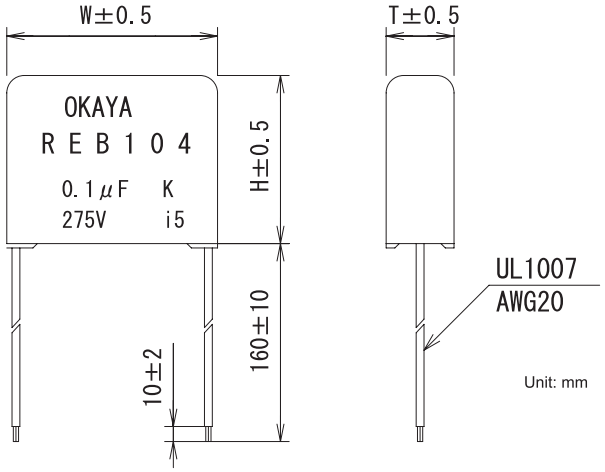



Circuit



●Model numbering system

R	E	B			
Series name			Capacitance		

Electrical Specifications

Rated Voltage 275VAC (UL, C-UL: 250VAC)

Safety Agency	Class	Model Number	Capacitance μF±10%	Dimensions W	Dimensions H	Dimensions T	Dissipation Factor	Test Voltage	Insulation Resistance
cULus 14 S	X2	REB473	0.047	17.0	12.5	5.5	0.003max (f=10kHz)	Line to Line 1250Vac 50/60Hz 60sec Line to Ground 2000Vac 50/60Hz 60sec	Line to Line C≦0.33μF 15000MΩmin. (at 10Vdc) Line to Ground C≧0.47μF 5000MΩ·Fmin. (at 100Vdc)
		REB683	0.068	17.0	13.5	6.5			
		REB104	0.1	17.0	15.0	8.0			
		REB154	0.15	20.0	17.5	8.5			
		REB224	0.22	20.0	17.5	8.5			
		REB334	0.33	27.0	18.0	8.0			
		REB474	0.47	27.0	19.5	9.5			
		REB684	0.68	32.0	21.5	10.5			
		REB105	1.0	32.0	23.5	12.5			

Operating Temperature: -40~+100℃