

# T1/CEPT/ISDN-PRI TRANSFORMERS

## FEATURES


- Dual surface mount package contains both transmit and receive transformers
- 3000 Vrms reinforced insulation barrier approved to EN60950, CS950, UL1950, and Austel AS3260



Electrical Specifications @ 25°C Operating Temperature 0°C to 70°C

Part Number	Turns Ratio (Pri:Sec ±2%)	OCL @ 25°C (mH MIN)	Cww (pF MAX)	DCR Pri (Ω MAX)	DCR Sec (Ω MAX)	Primary Pins
ST-81032	1CT:1.15CT & 1CT:1CT	1.60 & 1.60	15 & 15	1.10 & 1.00	1.10 & 0.90	16-14, 6-8

## Mechanical

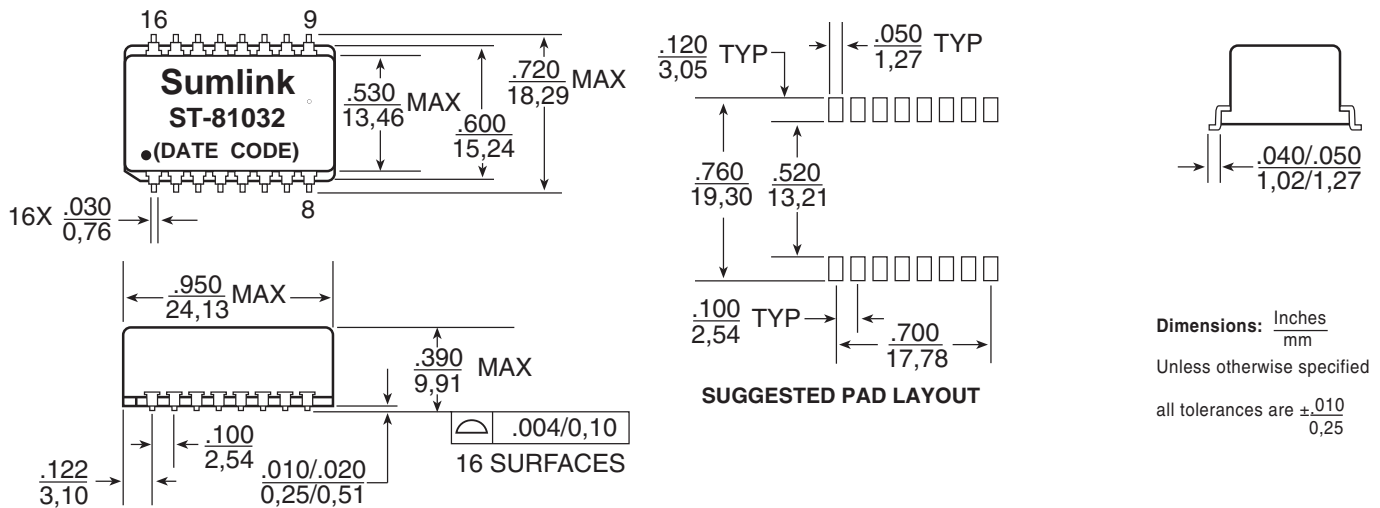

## Schematics

