2 W Constant Output Power Class-D Audio Amplifier with Class-G Boost Converter and Battery Tracking AGC

Check for Samples: TPA2025D1

FEATURES

- **Built-In Enhanced Battery Tracking Automatic Gain Control (AGC)**
  - **Limits Battery Current Consumption**
- **1.9 W into 8 Ω Load from 3.6 V Supply (1% THD+N)**
- **Integrated Adaptive Boost Converter**
  - **Increases Efficiency at Low Output Power**
- **Low Quiescent Current of 2 mA from 3.6 V**
- **Thermal and Short-Circuit Protection with Auto Recovery**
- **20 dB Fixed Gain**
- **Similar Performance to TPA2015D1**
- **Available in 1.53 mm × 1.982 mm, 0.5 mm pitch 12-ball WCSP Package**

APPLICATIONS

- **Cell Phones**
- **PDA, GPS**
- **Portable Electronics and Speakers**

DESCRIPTION


The TPA2025D1 is a high efficiency Class-D audio power amplifier with battery tracking AGC technology and an integrated Class-G boost converter that enhances efficiency at low output power. It drives up to 1.9 W into an 8 Ω speaker (1% THD+N). With 85% typical efficiency, the TPA2025D1 helps extend battery life when playing audio.

The built-in boost converter generates a 5.75 V supply voltage for the Class-D amplifier. This provides a louder audio output than a stand-alone amplifier directly connected to the battery. The battery tracking AGC adjusts the Class-D gain to limit battery current at lower battery voltage.

The TPA2025D1 has an integrated low-pass filter to improve the RF rejection and reduce DAC out-of-band noise, increasing the signal-to-noise ratio (SNR).

The TPA2025D1 is available in a space saving 1.53 mm × 1.982 mm, 0.5 mm pitch WCSP package (YZG).

SIMPLIFIED APPLICATION DIAGRAM

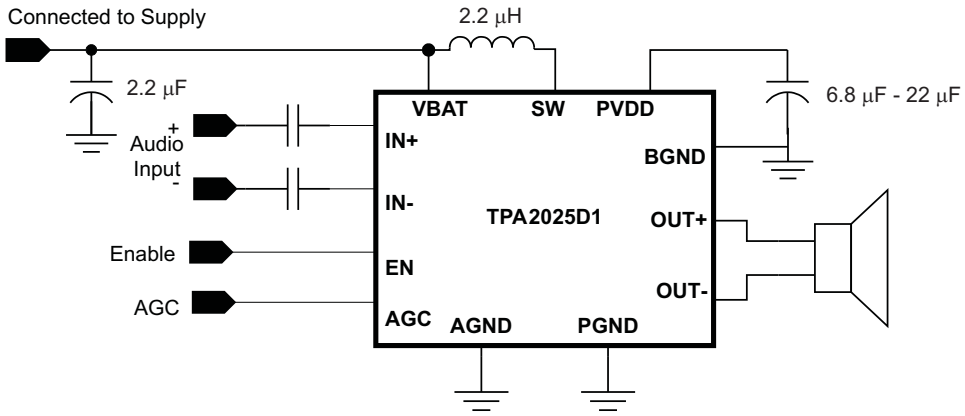


Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2011–2012, Texas Instruments Incorporated


These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

FUNCTIONAL BLOCK DIAGRAM

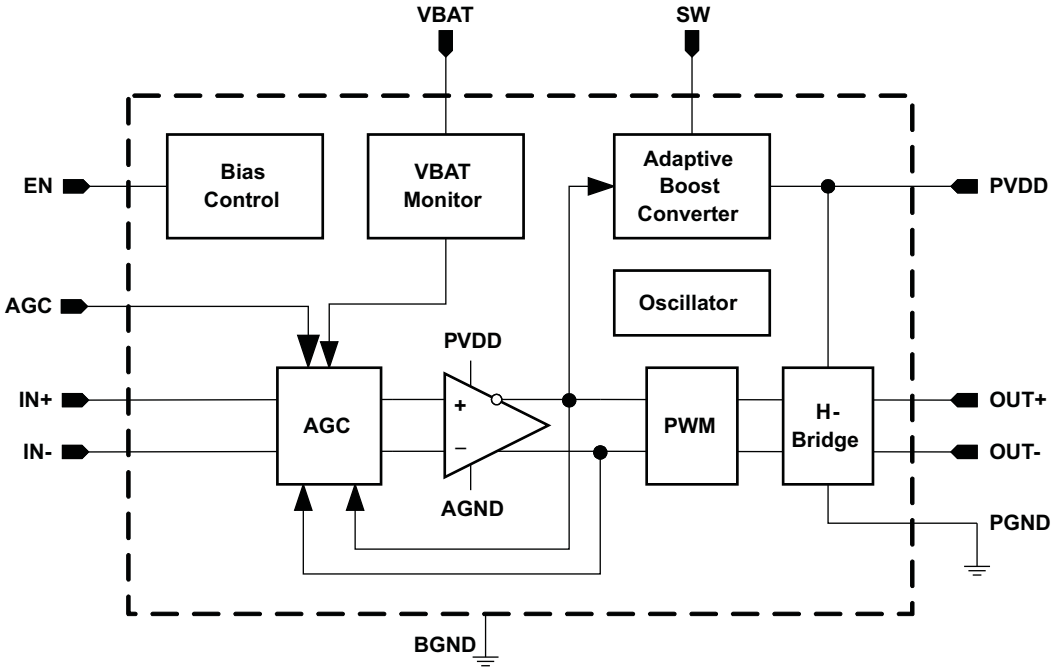

DEVICE PINOUT

YZG PACKAGE
(TOP VIEW)

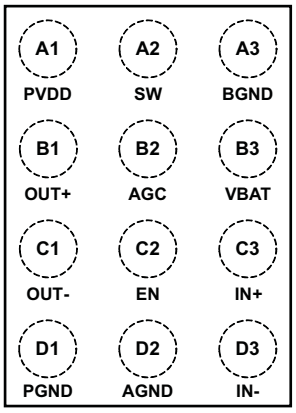

Copyright © 2011–2012, Texas Instruments Incorporated

PIN FUNCTIONS

PIN		INPUT/ OUTPUT/ POWER (I/O/P)	DESCRIPTION
NAME	WCSP		
PVDD	A1	O	Boost converter output and Class-D power stage supply voltage.
SW	A2	I	Boost converter switch input; connect boost inductor between VBAT and SW.
BGND	A3	P	Boost converter power ground.
OUT+	B1	O	Positive audio output.
AGC	B2	I	AGC inflection point select. Connect to VDD, GND or Float. Voltage at AGC pin is only read at device power-up. A power cycle is required to change inflection points.
VBAT	B3	P	Supply voltage.
OUT–	C1	O	Negative audio output.
EN	C2	I	Device enable; set to logic high to enable.
IN+	C3	I	Positive audio input.
PGND	D1	P	Class-D power ground.
AGND	D2	P	Analog ground.
IN–	D3	I	Negative audio input.

ORDERING INFORMATION

T_A	PACKAGED DEVICES(1)	PART NUMBER(2)	SYMBOL
–40°C to 85°C	12-ball, 1.53 mm × 1.982 mm WSCP	TPA2025D1YZGR	TPA2025D1
	12-ball, 1.53 mm × 1.982 mm WSCP	TPA2025D1YZGT	TPA2025D1

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI Web site at www.ti.com.
(2) The YZG package is only available taped and reeled. The suffix “R” indicates a reel of 3000, the suffix “T” indicates a reel of 250.

ABSOLUTE MAXIMUM RATINGS

Over operating free–air temperature range, T_A= 25°C (unless otherwise noted)(1)

		MIN	MAX	UNIT
Supply voltage	VBAT	–0.3	6	V
Input Voltage, V_I	IN+, IN–	–0.3	VBAT + 0.3	V
Output continuous total power dissipation		See the Thermal Information Table		
Operating free-air temperature range, T_A		–40	85	°C
Operating junction temperature range, T_J		–40	150	°C
Storage temperature range, T_{STG}		–65	150	°C
Minimum load resistance		3.2		Ω
ESD Protection	HBM		2000	V
	CDM		500	V
	MM		100	V

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute–maximum–rated conditions for extended periods may affect device reliability.

Copyright © 2011–2012, Texas Instruments Incorporated

THERMAL INFORMATION

THERMAL METRIC(1)		TPA2025D1 YZG 12 PINS	UNITS
θ_{JA}	Junction-to-ambient thermal resistance	97.3	°C/W
$\theta_{JC(top)}$	Junction-to-case(top) thermal resistance	36.7	
θ_{JB}	Junction-to-board thermal resistance	55.9	
ψ_{JT}	Junction-to-top characterization parameter	13.9	
ψ_{JB}	Junction-to-board characterization parameter	49.5	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, SPRA953.

RECOMMENDED OPERATING CONDITIONS

		MIN	MAX	UNIT
	Supply voltage, VBAT	2.5	5.2	V
V_{IH}	High–level input voltage, EN	1.3		V
V_{IL}	Low–level input voltage, EN		0.6	V
T_A	Operating free-air temperature	–40	85	°C
T_J	Operating junction temperature	–40	150	°C

ELECTRICAL CHARACTERISTICS

VBAT = 3.6 V, T_A = 25°C, R_L = 8 Ω + 33 µH (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
VBAT supply voltage range		2.5		5.2	V
Class-D supply voltage range	EN = VBAT, boost converter active		5.75		V
	Boost converter disabled (in bypass mode)	2.5		5.2	
Supply under voltage shutdown			2.2		V
Operating quiescent current	EN = VBAT = 3.6 V		2.0	5	mA
	EN = VBAT = 5.2V		2.5	6	
Shutdown quiescent current	VBAT = 2.5 V to 5.2 V, EN = GND		0.2	1	µA
Input common-mode voltage range	IN+, IN–	0.6		1.3	V
Start-up time			6	10	ms

Copyright © 2011–2012, Texas Instruments Incorporated

OPERATING CHARACTERISTICS

VBAT= 3.6 V, EN = VBAT, AGC = GND, T_A = 25°C, R_L = 8 Ω + 33 µH (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
BOOST CONVERTER						
PVDD	Boost converter output voltage range	I_{BOOST} = 0 mA	5.4	5.75	6.4	V
		I_{BOOST} = 700 mA		5.6		V
I_L	Boost converter input current limit	Power supply current		1800		mA
	Boost converter start-up current limit	Boost converter starts up from full shutdown		600		
		Boost converter wakes up from auto-pass through mode		1000		
f_{BOOST}	Boost converter frequency			1.2		MHz
CLASS-D AMPLIFIER						
P_O	Output power	THD = 1%, VBAT = 2.5 V, f = 1 kHz		1440		mW
		THD = 1%, VBAT = 3.0 V, f = 1 kHz		1750		
		THD = 1%, VBAT = 3.6 V, f = 1 kHz		1900		
		THD = 1%, VBAT = 2.5 V, f = 1 kHz, R_L = 4 Ω + 33 µH		1460		
		THD = 1%, VBAT = 3.0 V, f = 1 kHz, R_L = 4 Ω + 33 µH		1800		
		THD = 1%, VBAT = 3.6 V, f = 1 kHz, R_L = 4 Ω + 33 µH		2280		
V_O	Peak output voltage	THD = 1%, VBAT = 3.6 V, f = 1 kHz, 6 dB crest factor sine burst, no clipping		5.45		V
A_V	Voltage gain		19.5	20	20.5	dB
$\|V_{OOS}\|$	Output offset voltage			2	10	mV
	Short-circuit protection threshold current			2		A
R_{IN}	Input impedance (per input pin)	A_V = 20 dB		24		kΩ
	Input impedance in shutdown (per input pin)	EN = 0 V		1300		
Z_O	Output impedance in shutdown			2		kΩ
	Maximum input voltage swing	EN = 0 V		2		V_{RMS}
	Boost converter auto-pass through threshold	Class-D output voltage threshold when boost converter automatically turns on		2		V_{PK}
$f_{CLASS-D}$	Class-D switching frequency		275	300	325	kHz
η	Class-D and boost combined efficiency	P_O = 1 W, VBAT = 3.6 V		82%		
E_N	Noise output voltage	A-weighted		49		µV_{RMS}
		Unweighted		65		
SNR	Signal-to-noise ratio	1.7 W, R_L = 8 Ω + 33 µH. A-weighted		97		dB
		1.7 W, R_L = 8 Ω + 33 µH. Unweighted		95		
		2 W, R_L = 4 Ω + 33 µH. A-weighted		95		
		2 W, R_L = 4 Ω + 33 µH. Unweighted		93		
THD+N	Total harmonic distortion plus noise(1)	P_O = 100 mW, f = 1 kHz		0.06%		
		P_O = 500 mW, f = 1 kHz		0.07%		
		P_O = 1.7 W, f = 1 kHz, R_L = 8 Ω + 33 µH		0.07%		
		P_O = 2 W, f = 1 kHz, R_L = 4 Ω + 33 µH		0.15%		
	THD+N added to other audio signal connected at amplifier input during shutdown			0.02%		
AC PSRR	AC-Power supply ripple rejection (output referred)	200 mV_{PP} square ripple, V_{BAT} = 3.8 V, f = 217 Hz		62.5		dB
		200 mV_{PP} square ripple, V_{BAT} = 3.8 V, f = 1 kHz		62.5		

(1) A-weighted


Copyright © 2011–2012, Texas Instruments Incorporated

OPERATING CHARACTERISTICS (continued)

VBAT= 3.6 V, EN = VBAT, AGC = GND, T_A = 25°C, R_L = 8 Ω + 33 µH (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
AC CMRR	AC-Common mode rejection ratio (output referred)	200 mV_{PP} square ripple, V_{BAT} = 3.8 V, f = 217 Hz		71		dB
		200 mV_{PP} square ripple, V_{BAT} = 3.8 V, f = 1 kHz		71		
AUTOMATIC GAIN CONTROL						
	AGC maximum attenuation			10		dB
	AGC attenuation resolution			0.5		dB
	AGC attack time (gain decrease)			20		µs/dB
	AGC release time (gain increase)			1.6		s/dB
	Gain vs VBAT slope	VBAT < inflection point		7.5		dB/V
	AGC inflection point (Note: AGC pin voltage is read only at device power-up. A device power cycle is required to change AGC inflection points.)	AGC = Float		3.25		V
		AGC = GND		3.55		
		AGC = VBAT		3.75		

TEST SET-UP FOR GRAPHS

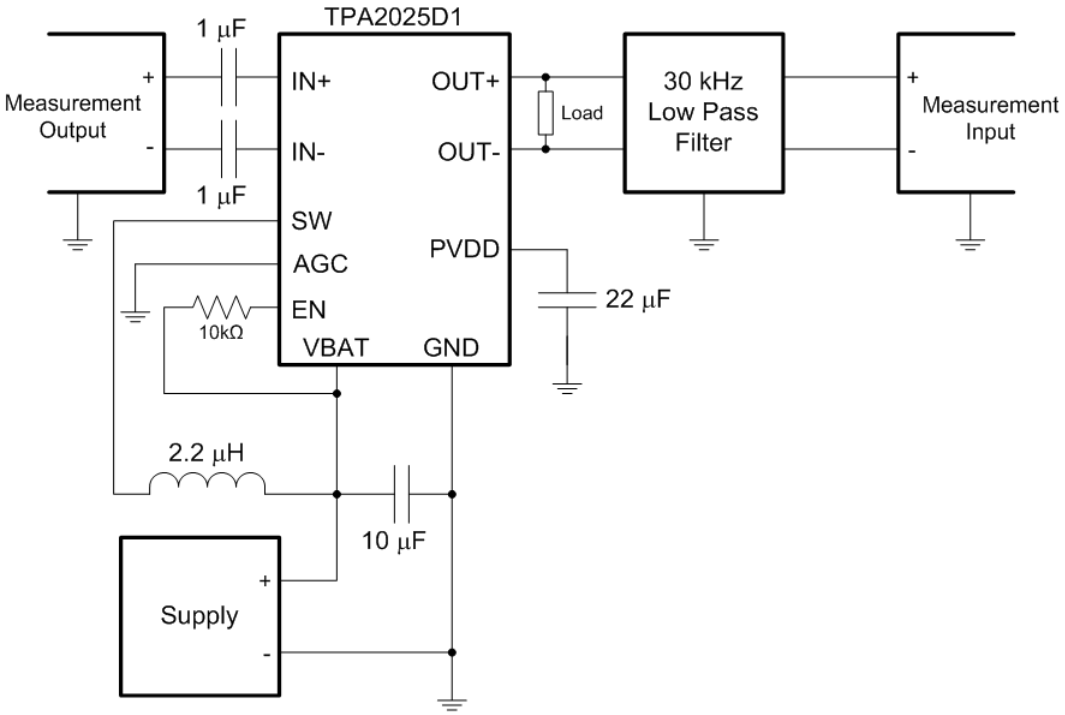

(1) The 1 µF input capacitors on IN+ and IN- were shorted for input common-mode voltage measurements.

(2) A 33 µH inductor was placed in series with the load resistor to emulate a small speaker for efficiency measurements.

(3) The 30 kHz low-pass filter is required even if the analyzer has an internal low-pass filter. An R-C low-pass filter (100 Ω, 47 nF) is used on each output for the data sheet graphs.

Copyright © 2011–2012, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS

VBAT = 3.6 V, C_I = 1 µF, C_{BOOST} = 22 µF, L_{BOOST} = 2.2 µH, EN = VBAT, and Load = 8 Ω + 33 µH, no ferrite bead unless otherwise specified.

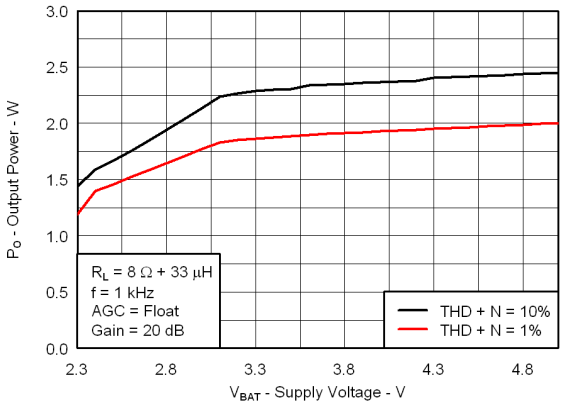


Figure 1. Output Power vs Supply Voltage

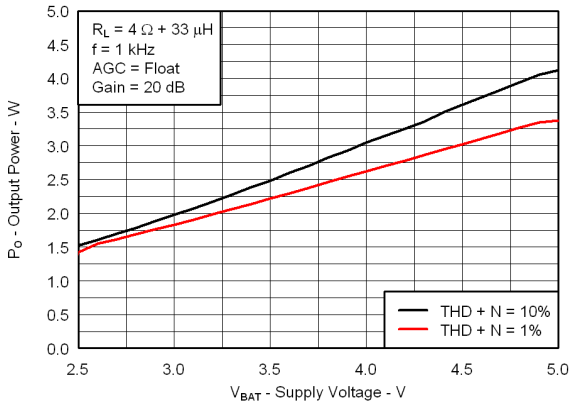


Figure 2. Output Power vs Supply Voltage

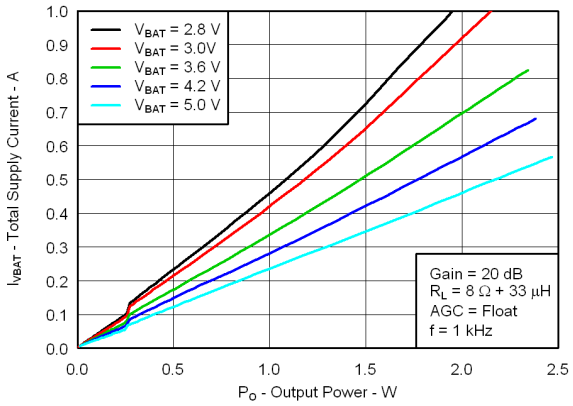


Figure 3. Total Supply Current vs Output Power

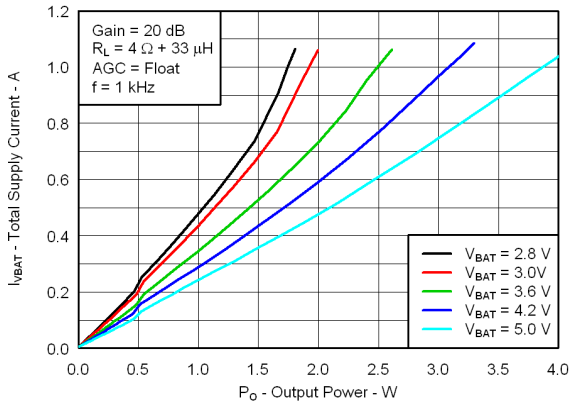


Figure 4. Total Supply Current vs Output Power

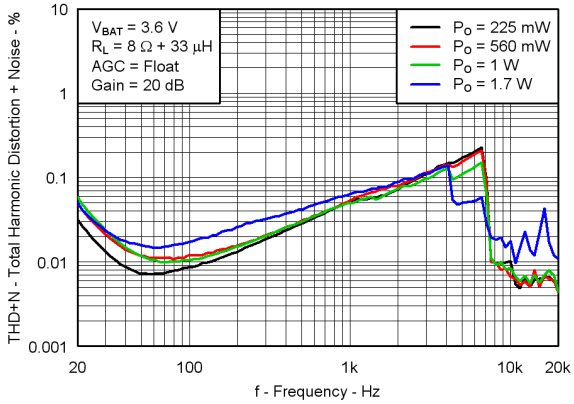


Figure 5. Total Harmonic Distortion + Noise vs Frequency

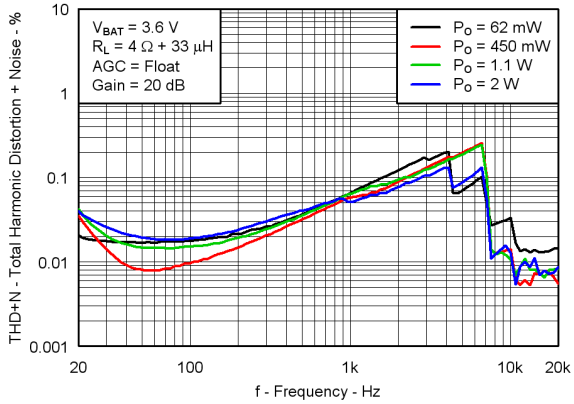


Figure 6. Total Harmonic Distortion + Noise vs Frequency

TYPICAL CHARACTERISTICS (continued)

VBAT = 3.6 V, C_I = 1 µF, C_{BOOST} = 22 µF, L_{BOOST} = 2.2 µH, EN = VBAT, and Load = 8 Ω + 33 µH, no ferrite bead unless otherwise specified.

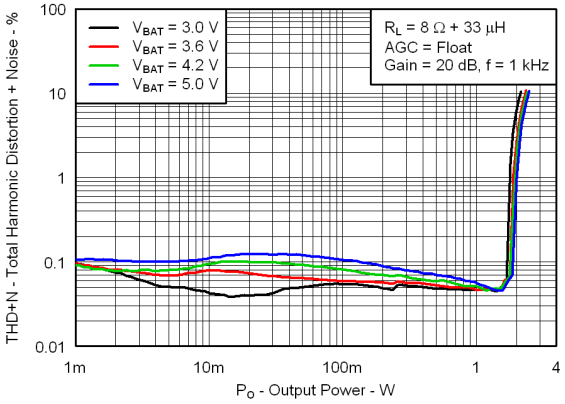


Figure 7. Total Harmonic Distortion + Noise vs Output Power

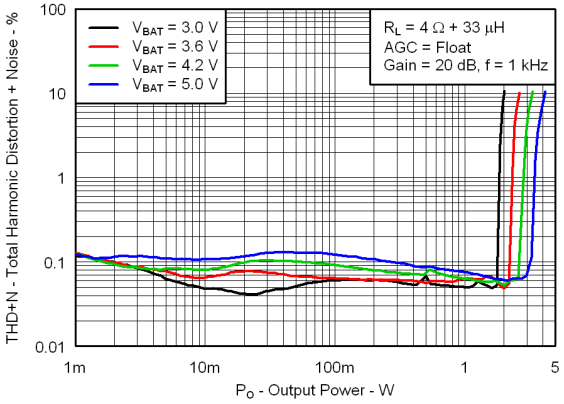


Figure 8. Total Harmonic Distortion + Noise vs Output Power

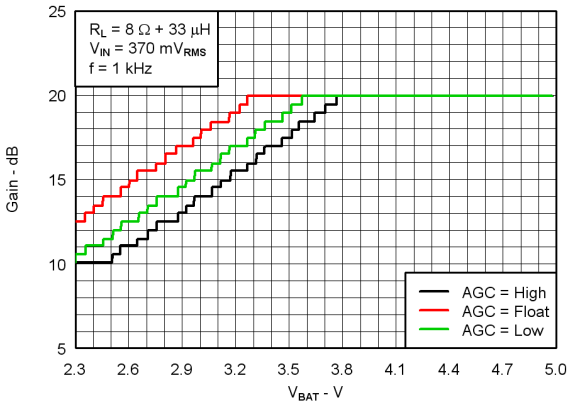


Figure 9. Gain vs Supply Voltage

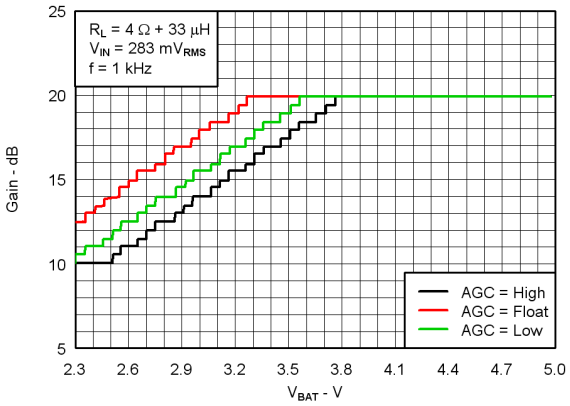


Figure 10. Gain vs Supply Voltage

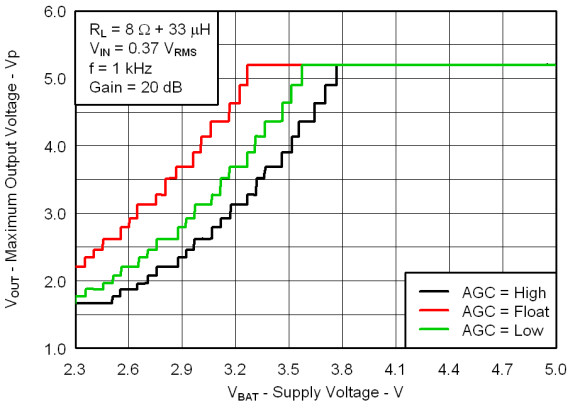


Figure 11. Maximum Peak Output Voltage vs Supply Voltage

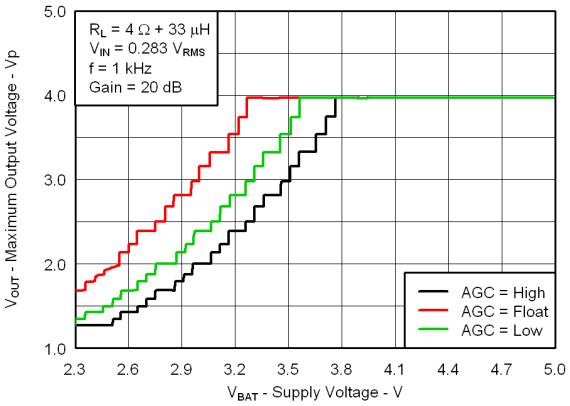


Figure 12. Maximum Peak Output Voltage vs Supply Voltage

Copyright © 2011–2012, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (continued)

VBAT = 3.6 V, C_I = 1 µF, C_{BOOST} = 22 µF, L_{BOOST} = 2.2 µH, EN = VBAT, and Load = 8 Ω + 33 µH, no ferrite bead unless otherwise specified.

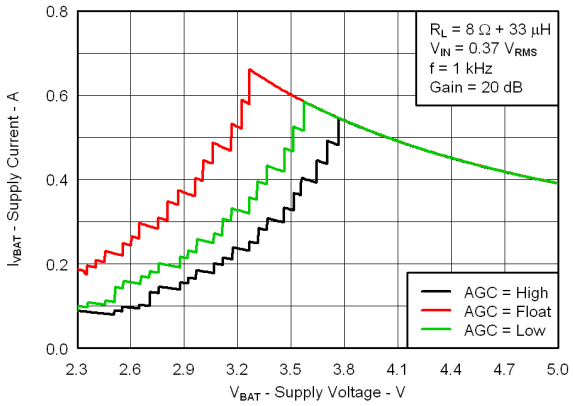


Figure 13. Supply Current vs Supply Voltage

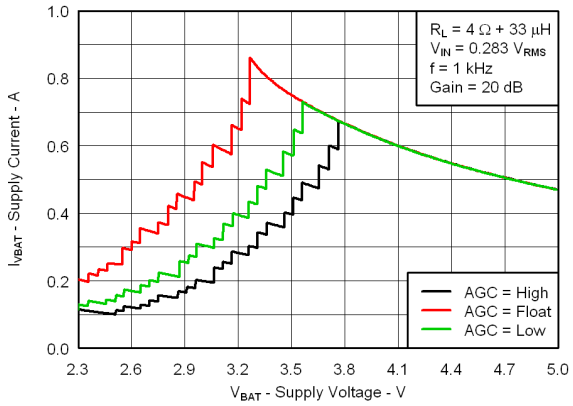


Figure 14. Supply Current vs Supply Voltage

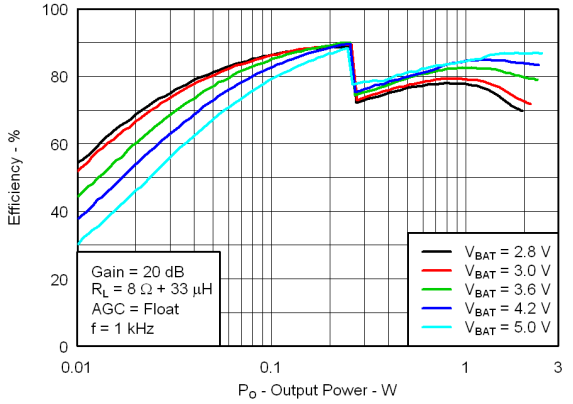


Figure 15. Total Efficiency vs Output Power

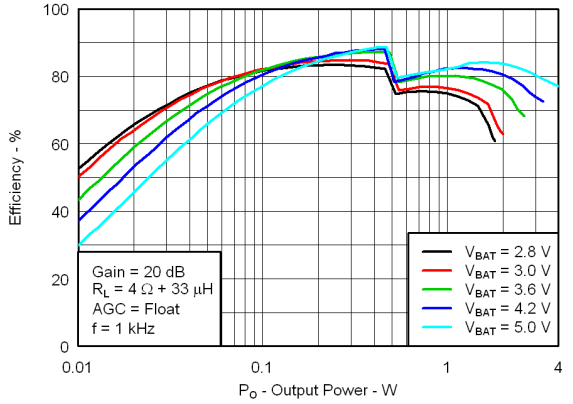


Figure 16. Total Efficiency vs Output Power

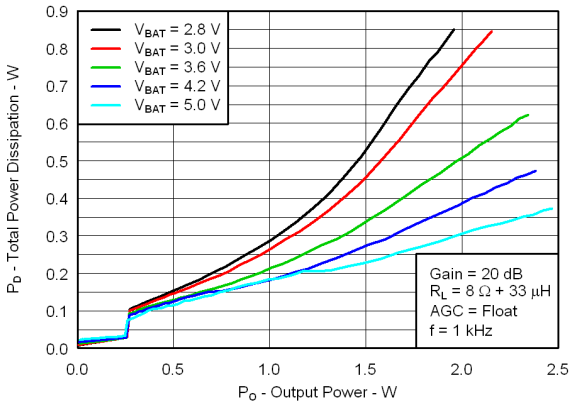


Figure 17. Total Power Dissipation vs Output Power

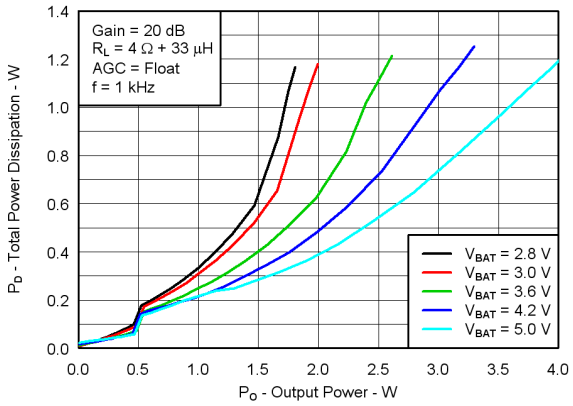


Figure 18. Total Power Dissipation vs Output Power

Copyright © 2011–2012, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (continued)

VBAT = 3.6 V, C_I = 1 µF, C_{BOOST} = 22 µF, L_{BOOST} = 2.2 µH, EN = VBAT, and Load = 8 Ω + 33 µH, no ferrite bead unless otherwise specified.

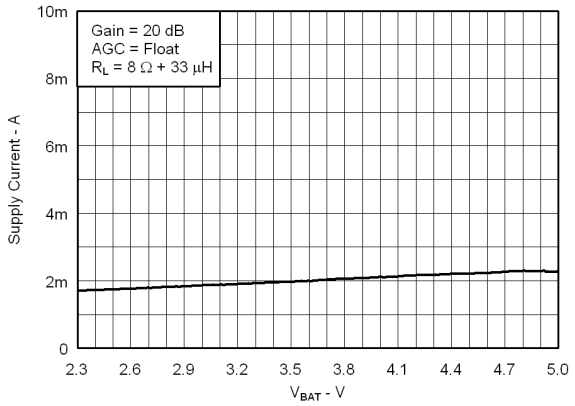


Figure 19. Quiescent Supply Current vs Supply Voltage

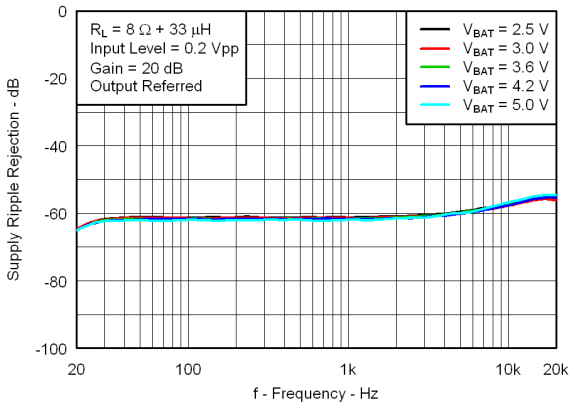


Figure 20. Supply Ripple Rejection vs Frequency

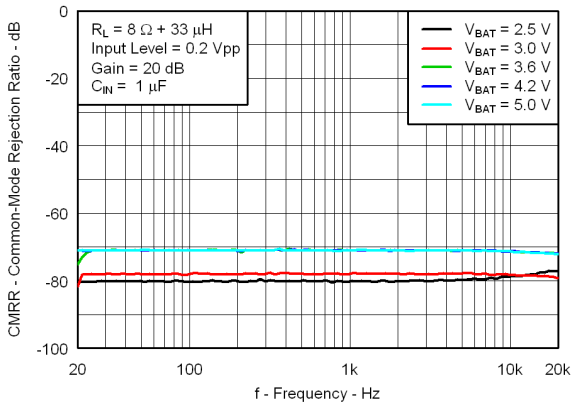


Figure 21. Common Mode Rejection Ratio vs Frequency

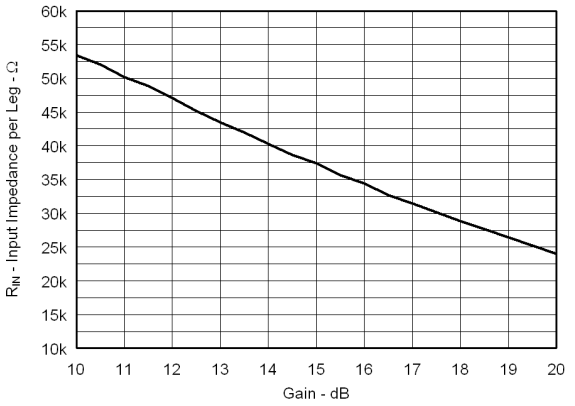


Figure 22. Input Impedance vs Gain

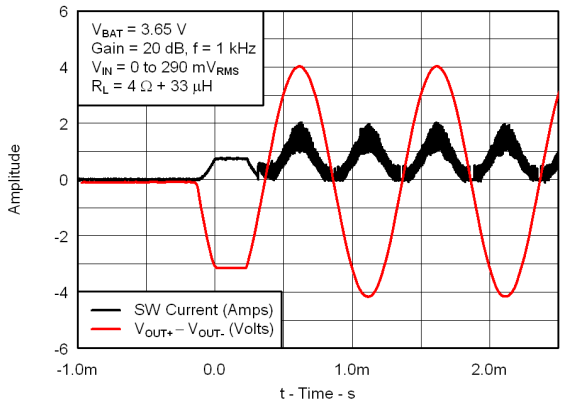


Figure 23. Boost Startup Current vs Time

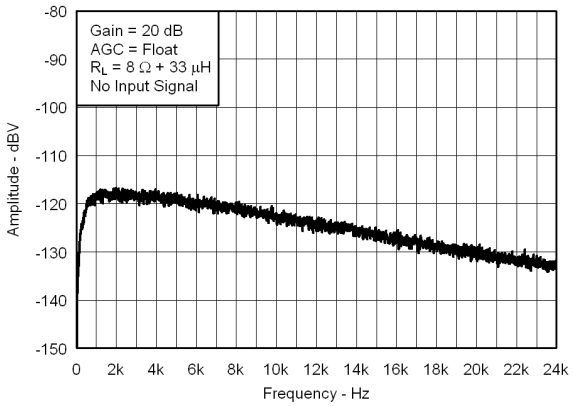


Figure 24. A-Weighted Noise vs Frequency

Copyright © 2011–2012, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (continued)

VBAT = 3.6 V, C_I = 1 µF, C_{BOOST} = 22 µF, L_{BOOST} = 2.2 µH, EN = VBAT, and Load = 8 Ω + 33 µH, no ferrite bead unless otherwise specified.

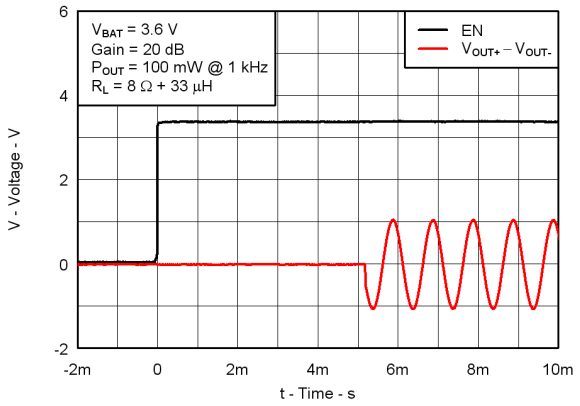


Figure 25. Startup Timing

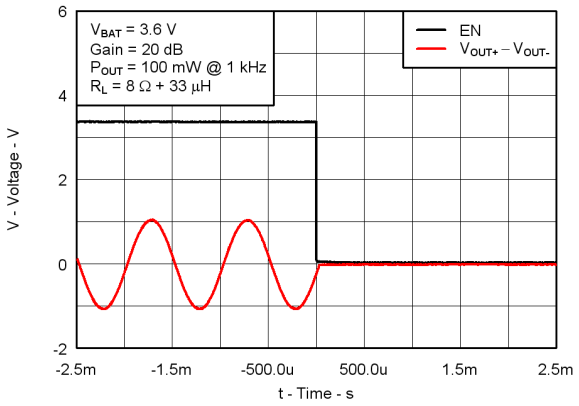


Figure 26. Shutdown Timing

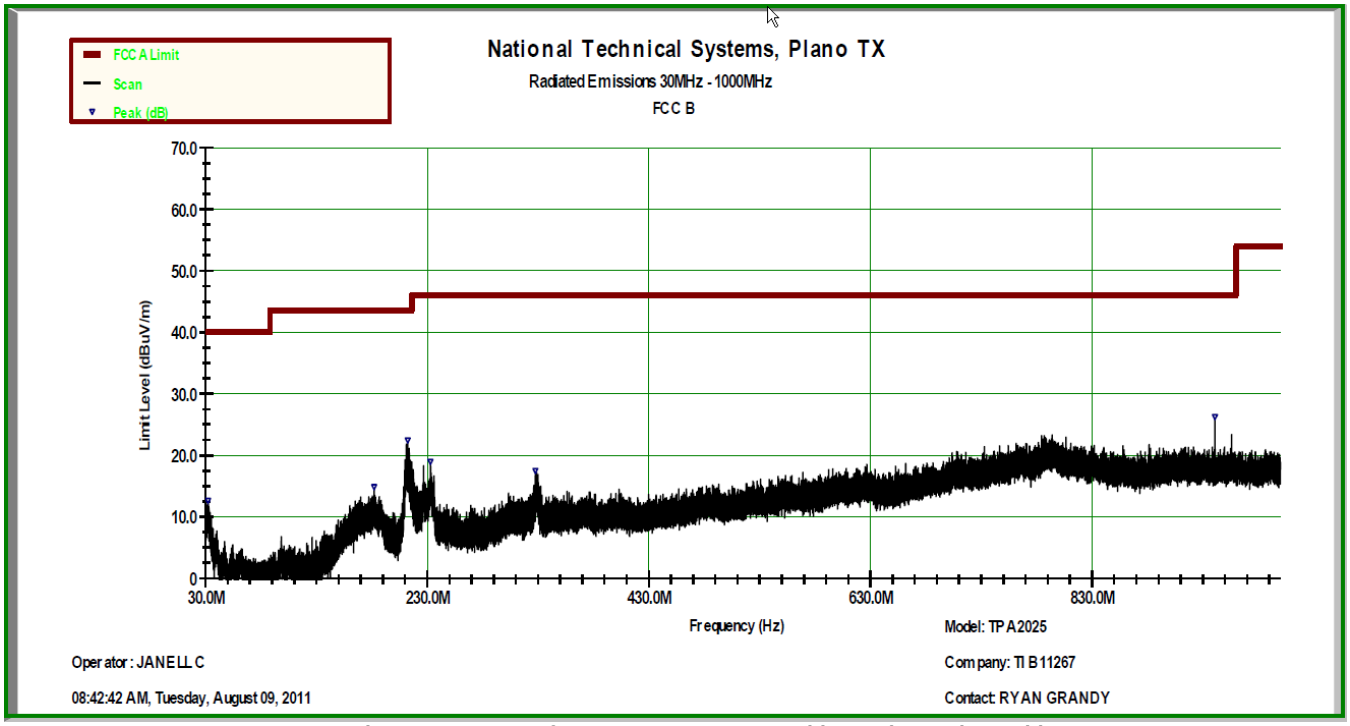


Figure 27. EMC Performance Po = 750 mW with 2 Inch Speaker Cable

Copyright © 2011–2012, Texas Instruments Incorporated

BATTERY TRACKING AUTOMATIC GAIN CONTROL (AGC)

TPA2025D1 monitors the battery voltage and automatically reduces the gain when the battery voltage is below a certain threshold voltage, which is defined as inflection point. Although battery tracking AGC lowers the audio loudness, it prevents high battery current at end-of-charge battery voltage. The inflection point is selectable at AGC pin. When the amplifier is turned on, the gain is set according to battery voltage and selected inflection point.

Figure 28 shows the plot of gain as a function of battery supply voltage. The default slope is 7.5 dB/V. When battery voltage drops below inflection point by 1 V, AGC reduces the gain by 7.5 dB. For custom slope options and other AGC settings, contact a Texas Instruments sales representative or distributor. The TPA2025D1 can only operate at one slope.

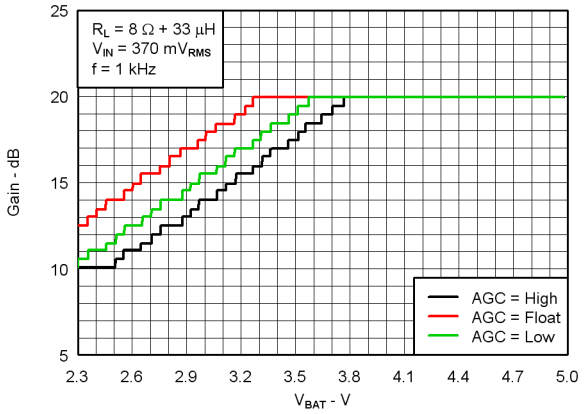


Figure 28. Gain vs Battery voltage

Figure 29 shows the operation of AGC in time domain.

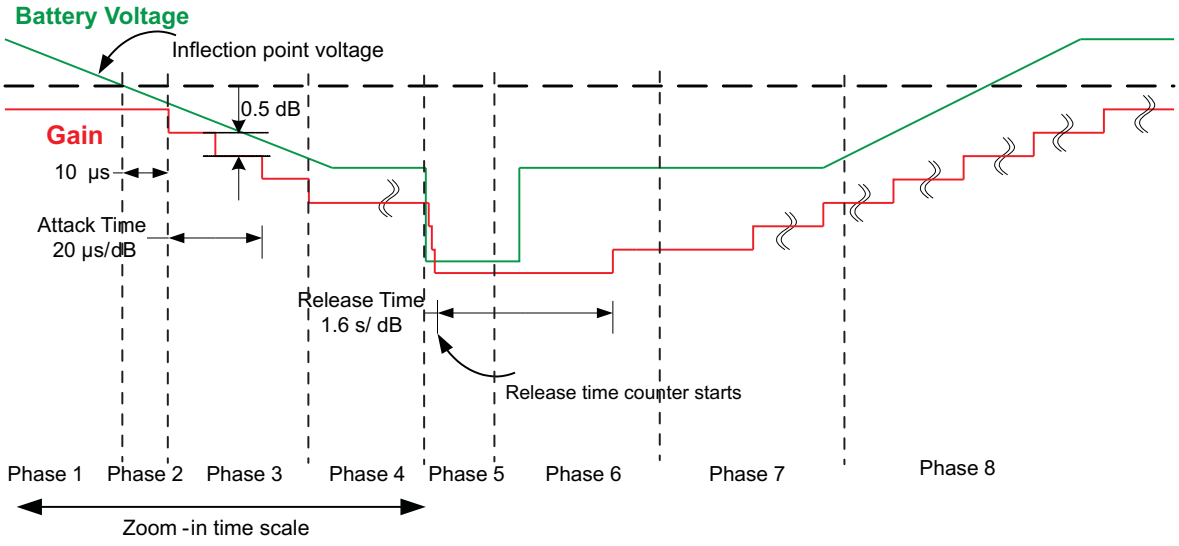


Figure 29. Relationship Between Supply Voltage and Gain in Time Domain

Phase 1	Battery discharging normally; supply voltage is above inflection point; audio gain remains at 20 dB.
Phase 2	Battery voltage decreases below inflection point. AGC responses in 10 µs and reduces gain by one step (0.5 dB)
Phase 3	Battery voltage continues to decrease. AGC continues to reduce gain. The rate of gain decrease is defined as attack time. TPA2025D1's attack time is 20 µs/dB.

Copyright © 2011–2012, Texas Instruments Incorporated

Phase 4	Battery voltage is constant. AGC stops reducing gain.
Phase 5	Battery voltage decreases suddenly. AGC reduces gain multiple steps. (time scale from this phase is longer) Release time counter resets every end of attack event.
Phase 6	Release time has elapsed. Battery voltage returns to previous level. AGC increases gain by one step. TPA2025D1's release time is 1.6 s/dB
Phase 7	Battery voltage remains constant. AGC continues to increase gain until it reaches steady state gain value defined in Figure 28.
Phase 8	Battery voltage is recharged to above inflection point. AGC continues to increase gain until it reaches 20 dB.

BOOST CONVERTER AUTO PASS THROUGH (APT)

The TPA2025D1 consists of an adaptive boost converter and a Class-D amplifier. The boost converter operates from the supply voltage, VBAT, and generates a higher output voltage PVDD at 5.75 V. PVDD drives the supply voltage of the Class-D amplifier. This improves loudness over non-boosted solutions. The boost converter has a "Pass Through" mode in which it turns off automatically and PVDD is directly connected to VBAT through an internal bypass switch.

The boost converter is adaptive and operates between pass through mode and boost mode depending on the output audio signal amplitude. When the audio output amplitude exceeds the "auto pass through" (APT) threshold, the boost converter is activated automatically and goes to boost mode. The transition time from normal mode to boost mode is less than 3 ms. TPA2025D1's APT threshold is fixed at 2 Vpk. When the audio output signal is below APT threshold, the boost converter is deactivated and goes to pass through mode. The adaptive boost converter maximizes system efficiency in lower audio output level.

The battery AGC is independent of APT threshold. The AGC operates in both boost-active and APT modes.

Figure 30 shows how the adaptive boost converter behaves with a typical audio signal.

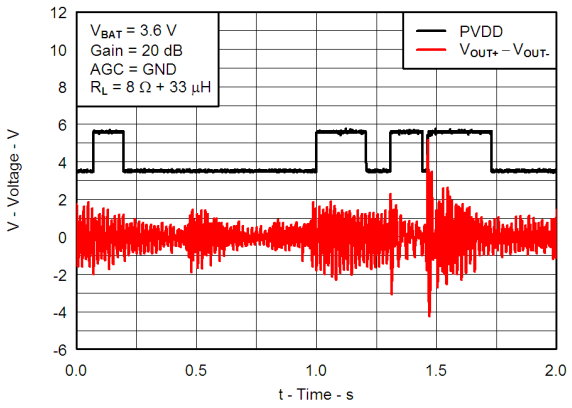


Figure 30. Adaptive Boost Converter with Typical Music Playback

BOOST CONVERTER COMPONENT SECTION

The critical external components are summarized in the following table:

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Boost converter inductor	At 30% rated DC bias current of the inductor	1.5	2.2	4.7	µH
Boost converter input capacitor		4.7		10	µF
Boost converter output capacitor	Working capacitance biased at boost output voltage, if 4.7µH inductor is chosen, then minimum capacitance is 10 µF	4.7		22	µF

Boost Terms

The following is a list of terms and definitions used in the boost equations found later in this document.

C	Minimum boost capacitance required for a given ripple voltage on PVDD.
L	Boost inductor
f_{BOOST}	Switching frequency of the boost converter.
I_{PVDD}	Current pulled by the Class-D amplifier from the boost converter.
I_L	Average current through the boost inductor.
PVDD	Supply voltage for the Class-D amplifier. (Voltage generated by the boost converter output)
VBAT	Supply voltage to the IC.
ΔI_L	Ripple current through the inductor.
ΔV	Ripple voltage on PVDD.

Inductor Equations

Inductor current rating is determined by the requirements of the load. The inductance is determined by two factors: the minimum value required for stability and the maximum ripple current permitted in the application. Use Equation 1 to determine the required current rating. Equation 1 shows the approximate relationship between the average inductor current, I_L, to the load current, load voltage, and input voltage (I_{PVDD}, PVDD, and VBAT, respectively). Insert I_{PVDD}, PVDD, and VBAT into Equation 1 and solve for I_L. The inductor must maintain at least 90% of its initial inductance value at this current.

$$I_L = I_{PVDD} \times \left(\frac{PVDD}{VBAT \times 0.8} \right) \quad (1)$$

Ripple current, ΔI_L, is peak-to-peak variation in inductor current. Smaller ripple current reduces core losses in the inductor and reduces the potential for EMI. Use Equation 2 to determine the value of the inductor, L. Equation 2 shows the relationship between inductance L, VBAT, PVDD, the switching frequency, f_{BOOST}, and ΔI_L. Insert the maximum acceptable ripple current into Equation 2 and solve for L.

$$L = \frac{VBAT \times (PVDD - VBAT)}{\Delta I_L \times f_{BOOST} \times PVDD} \quad (2)$$

ΔI_L is inversely proportional to L. Minimize ΔI_L as much as is necessary for a specific application. Increase the inductance to reduce the ripple current. Do not use greater than 4.7 µH, as this prevents the boost converter from responding to fast output current changes properly. If using above 3.3 µH, then use at least 10 µF capacitance on PVDD to ensure boost converter stability.

The typical inductor value range for the TPA2025D1 is 2.2 µH to 3.3 µH. Select an inductor with less than 0.5 Ω dc resistance, DCR. Higher DCR reduces total efficiency due to an increase in voltage drop across the inductor.

Copyright © 2011–2012, Texas Instruments Incorporated

Table 1. Sample Inductors

L (µH)	SUPPLIER	COMPONENT CODE	SIZE (LxWxH mm)	DCR TYP (mΩ)	I_{SAT} MAX (A)	C RANGE
2.2	Chilisin Electronics Corp.	CLCN252012T-2R2M-N	2.5 x 2.0 x 1.2	105	1.2	4.7 - 22 µF / 16 V 6.8 - 22 µV / 10 V
2.2	Toko	1239AS-H-2R2N=P2	2.5 x 2.0 x 1.2	96	2.3	
2.2	Coilcraft	XFL4020-222MEC	4.0 x 4.0 x 2.15	22	3.5	
3.3	Toko	1239AS-H-3R3N=P2	2.5 x 2.0 x 1.2	160	2.0	10 - 22 µF / 10 V
3.3	Coilcraft	XFL4020-332MEC	4.0 x 4.0 x 2.15	35	2.8	

Boost Converter Capacitor Selection

The value of the boost capacitor is determined by the minimum value of working capacitance required for stability and the maximum voltage ripple allowed on PVDD in the application. Working capacitance refers to the available capacitance after derating the capacitor value for DC bias, temperature, and aging. Do not use any component with a working capacitance less than 4.7 µF. This corresponds to a 4.7 µF/16 V capacitor, or a 6.8 µF/10 V capacitor.

Do not use above 22 µF capacitance as it will reduce the boost converter response time to large output current transients.

Equation 3 shows the relationship between the boost capacitance, C, to load current, load voltage, ripple voltage, input voltage, and switching frequency (I_{PVDD}, PVDD, ΔV, VBAT, and f_{BOOST} respectively).

Insert the maximum allowed ripple voltage into Equation 3 and solve for C. The 1.5 multiplier accounts for capacitance loss due to applied dc voltage and temperature for X5R and X7R ceramic capacitors.

$$C = 1.5 \times \frac{I_{PVDD} \times (PVDD - VBAT)}{\Delta V \times f_{BOOST} \times PVDD} \quad (3)$$

COMPONENTS LOCATION AND SELECTION

Decoupling Capacitors

The TPA2025D1 is a high-performance Class-D audio amplifier that requires adequate power supply decoupling. Adequate power supply decoupling to ensures that the efficiency is high and total harmonic distortion (THD) is low.

Place a low equivalent-series-resistance (ESR) ceramic capacitor, typically 0.1 µF, within 2 mm of the VBAT ball. This choice of capacitor and placement helps with higher frequency transients, spikes, or digital hash on the line. Additionally, placing this decoupling capacitor close to the TPA2025D1 is important, as any parasitic resistance or inductance between the device and the capacitor causes efficiency loss. In addition to the 0.1 µF ceramic capacitor, place a 2.2 µF to 10 µF capacitor on the VBAT supply trace. This larger capacitor acts as a charge reservoir, providing energy faster than the board supply, thus helping to prevent any droop in the supply voltage.

Input Capacitors

Input audio DC decoupling capacitors are recommended. The input audio DC decoupling capacitors prevents the AGC from changing the gain due to audio DAC output offset. The input capacitors and TPA2025D1 input impedance form a high-pass filter with the corner frequency, f_C, determined in Equation 4.

Any mismatch in capacitance between the two inputs will cause a mismatch in the corner frequencies. Severe mismatch may also cause turn-on pop noise. Choose capacitors with a tolerance of ±10% or better.

$$f_c = \frac{1}{(2 \times \pi \times R_I C_I)} \quad (4)$$

SHORT CIRCUIT AUTO-RECOVERY

When a short circuit event happens, the TPA2025D1 goes to low duty cycle mode and tries to reactivate itself every 1.6 seconds. This auto-recovery continues until the short circuit event stops. This feature protects the device without affecting its long term reliability.

Copyright © 2011–2012, Texas Instruments Incorporated

THERMAL PROTECTION

It is important to operate the TPA2025D1 at temperatures lower than its maximum operating temperature. The maximum ambient temperature depends on the heat-sinking ability of the PCB system. Given θ_{JA} of 97.3°C/W, the maximum allowable junction temperature of 150°C, and the internal dissipation of 0.5 W for 1.9 W, 8 Ω load, 3.6 V supply, the maximum ambient temperature is calculated as:

$$T_{A,MAX} = T_{J,MAX} – \theta_{JA} P_D = 150°C – (97.3°C/W \times 0.5W) = 101.4°C$$

The calculated maximum ambient temperature is 101.4°C at maximum power dissipation at 3.6 V supply and 8 Ω load. The TPA2025D1 is designed with thermal protection that turns the device off when the junction temperature surpasses 150°C to prevent damage to the IC.

OPERATION WITH DACS AND CODECS

Large noise voltages can be present at the output of ΔΣ DACs and CODECs, just above the audio frequency (e.g: 80 kHz with a 300 mV_{P-P}). This out-of-band noise is due to the noise shaping of the delta-sigma modulator in the DAC. Some Class-D amplifiers have higher output noise when used in combination with these DACs and CODECs. This is because out-of-band noise from the CODEC/DAC mixes with the Class-D switching frequencies in the audio amplifier input stage. The TPA2025D1 has a built-in low-pass filter with cutoff frequency at 55 kHz that reduces the out-of-band noise and RF noise, filtering out-of-band frequencies that could degrade in-band noise performance. This built-in filter also prevents AGC errors due to out-of-band noise. The TPA2025D1 AGC calculates gain based on input signal amplitude only. If driving the TPA2025D1 input with 4th-order or higher ΔΣ DACs or CODECs, add an R-C low pass filter at each of the audio inputs (IN+ and IN-) of the TPA2025D1 to ensure best performance. The recommended resistor value is 100 Ω and the capacitor value of 47 nF.

SPEAKER LOAD LIMITATION

Speakers are non-linear loads with varying impedance (magnitude and phase) over the audio frequency. A portion of speaker load current can flow back into the boost converter output via the Class-D output H-bridge high-side device. This is dependent on the speaker's phase change over frequency, and the audio signal amplitude and frequency content. Most portable speakers have limited phase change at the resonant frequency, typically no more than 40 or 50 degrees. To avoid excess flow-back current, use speakers with limited phase change. Otherwise, flow-back current could drive the PVDD voltage above the absolute maximum recommended operational voltage.

Confirm proper operation by connecting the speaker to the TPA2025D1 and driving it at maximum output swing. Observe the PVDD voltage with an oscilloscope. In the unlikely event the PVDD voltage exceeds 6.5 V, add a 6.8 V Zener diode between PVDD and ground to ensure the TPA2025D1 operates properly. The amplifier has thermal overload protection and deactivates if the die temperature exceeds 150°C. It automatically reactivates once die temperature returns below 150°C. Built-in output over-current protection deactivates the amplifier if the speaker load becomes short-circuited. The amplifier automatically restarts 1.6 seconds after the over-current event. Although the TPA2025D1 Class-D output can withstand a short between OUT+ and OUT-, do not connect either output directly to GND, VDD, or VBAT as this could damage the device.

PACKAGE DIMENSIONS

The TPA2025D1 uses a 12-ball, 0.5 mm pitch WCSP package. The die length (D) and width (E) correspond to the package mechanical drawing at the end of the datasheet.

Table 2. TPA2025D1 YZG Package Dimensions

Dimension	D	E
Max	2012 µm	1560 µm
Typ	1982 µm	1530 µm
Min	1952 µm	1500 µm

Copyright © 2011–2012, Texas Instruments Incorporated

BOARD LAYOUT

TPA2025D1 has AGND, BGND and PGND for analog circuit, boost converter and Class-D amplifier respectively. These three ground pins should be connected together through a solid ground plane with multiple ground VIAs.

In making the pad size for the WCSP balls, it is recommended that the layout use non-solder mask defined (NSMD) land. With this method, the solder mask opening is made larger than the desired land area, and the opening size is defined by the copper pad width. Figure 31 shows the appropriate diameters for a WCSP layout. show a typical 4-layer PCB layout example used in the Mini EVM.

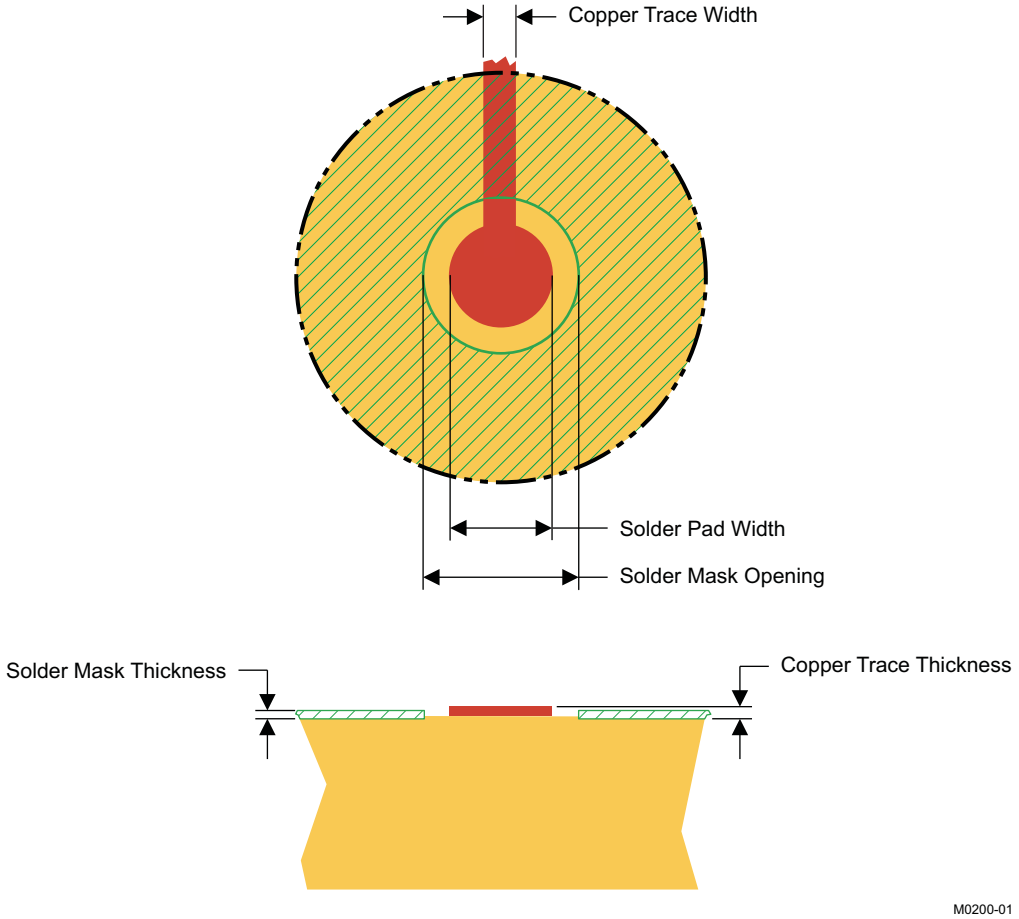


Figure 31. Land Pattern Dimensions

Table 3. Land Pattern Dimensions (1) (2) (3) (4)

SOLDER PAD DEFINITIONS	COPPER PAD	SOLDER MASK (5) OPENING	COPPER THICKNESS	STENCIL (6) (7) OPENING	STENCIL THICKNESS
Nonsolder mask defined (NSMD)	275 µm (+0.0, -25 µm)	375 µm (+0.0, -25 µm)	1 oz max (32 µm)	275 µm x 275 µm Sq. (rounded corners)	125 µm thick

(1) Circuit traces from NSMD defined PWB lands should be 75 µm to 100 µm wide in the exposed area inside the solder mask opening. Wider trace widths reduce device stand off and impact reliability.
(2) Best reliability results are achieved when the PWB laminate glass transition temperature is above the operating the range of the intended application.
(3) Recommend solder paste is Type 3 or Type 4.
(4) For a PWB using a Ni/Au surface finish, the gold thickness should be less 0.5 mm to avoid a reduction in thermal fatigue performance.
(5) Solder mask thickness should be less than 20 µm on top of the copper circuit pattern
(6) Best solder stencil performance is achieved using laser cut stencils with electro polishing. Use of chemically etched stencils results in inferior solder paste volume control.
(7) Trace routing away from WCSP device should be balanced in X and Y directions to avoid unintentional component movement due to solder wetting forces.

Copyright © 2011–2012, Texas Instruments Incorporated

REVISION HISTORY

NOTE: Page numbers of current version may differ from previous versions.

Changes from Original (August 2011) to Revision A	Page
• Changed Operating quiescent current TYP value from "3.5" to "2.0" for VBAT = 3.6 V; and, TYP value from "4" to 2.5" for VBAT = 5.2 V	4
• Changed Shutdown quiescent current MAX value from "3" to "1"	4
• Changed from "110 ms" to "1.6 seconds" in the SHORT CIRCUIT AUTO-RECOVERY description.	15
• Changed from "within 200 ms" to "1.6 seconds" in the SPEAKER LOAD LIMITATION description.	16

Copyright © 2011–2012, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/ Ball Finish	MSL Peak Temp (3)	Samples (Requires Login)
TPA2025D1YZGR	ACTIVE	DSBGA	YZG	12	3000	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	
TPA2025D1YZGT	ACTIVE	DSBGA	YZG	12	250	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

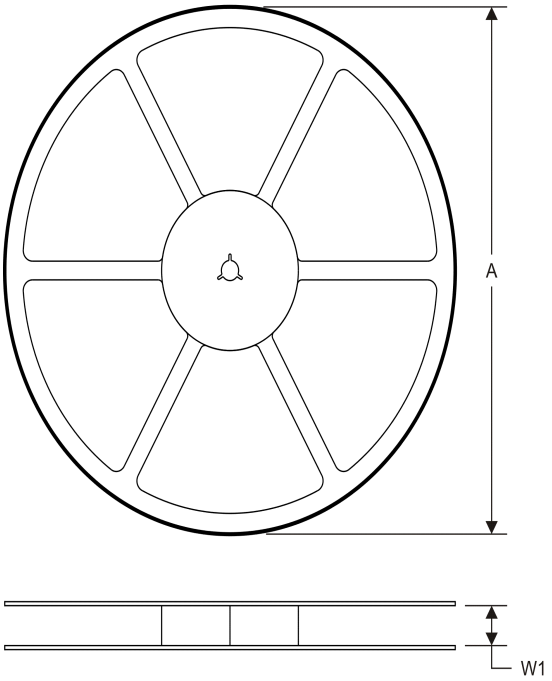

TAPE DIMENSIONS

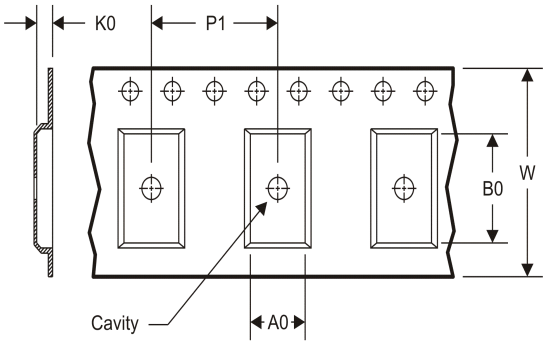


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

TAPE AND REEL INFORMATION

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPA2025D1YZGR	DSBGA	YZG	12	3000	180.0	8.4	1.63	2.08	0.69	4.0	8.0	Q1
TPA2025D1YZGT	DSBGA	YZG	12	250	180.0	8.4	1.63	2.08	0.69	4.0	8.0	Q1


TAPE AND REEL BOX DIMENSIONS

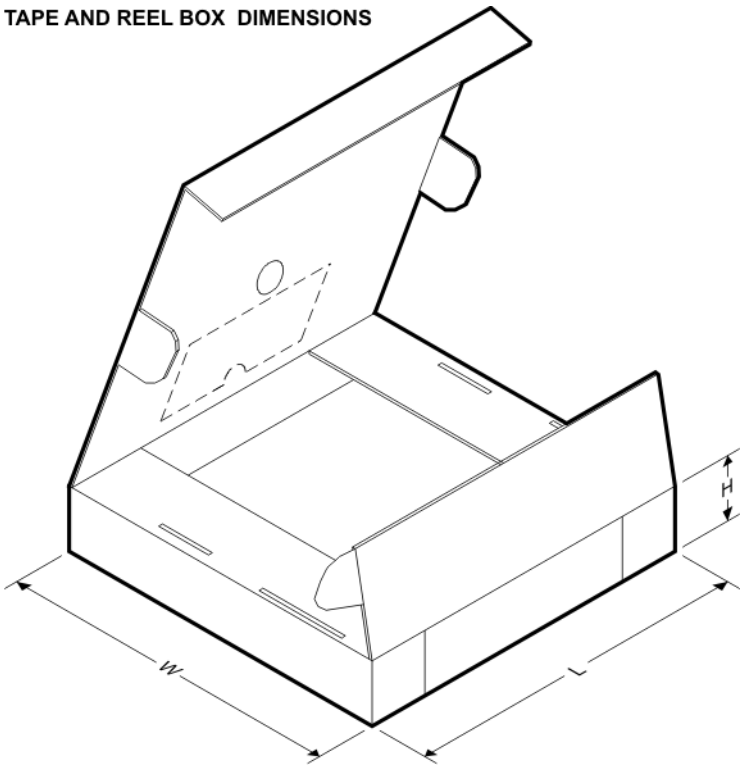

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPA2025D1YZGR	DSBGA	YZG	12	3000	210.0	185.0	35.0
TPA2025D1YZGT	DSBGA	YZG	12	250	210.0	185.0	35.0

YZG (R–XBGA–N12) DIE–SIZE BALL GRID ARRAY

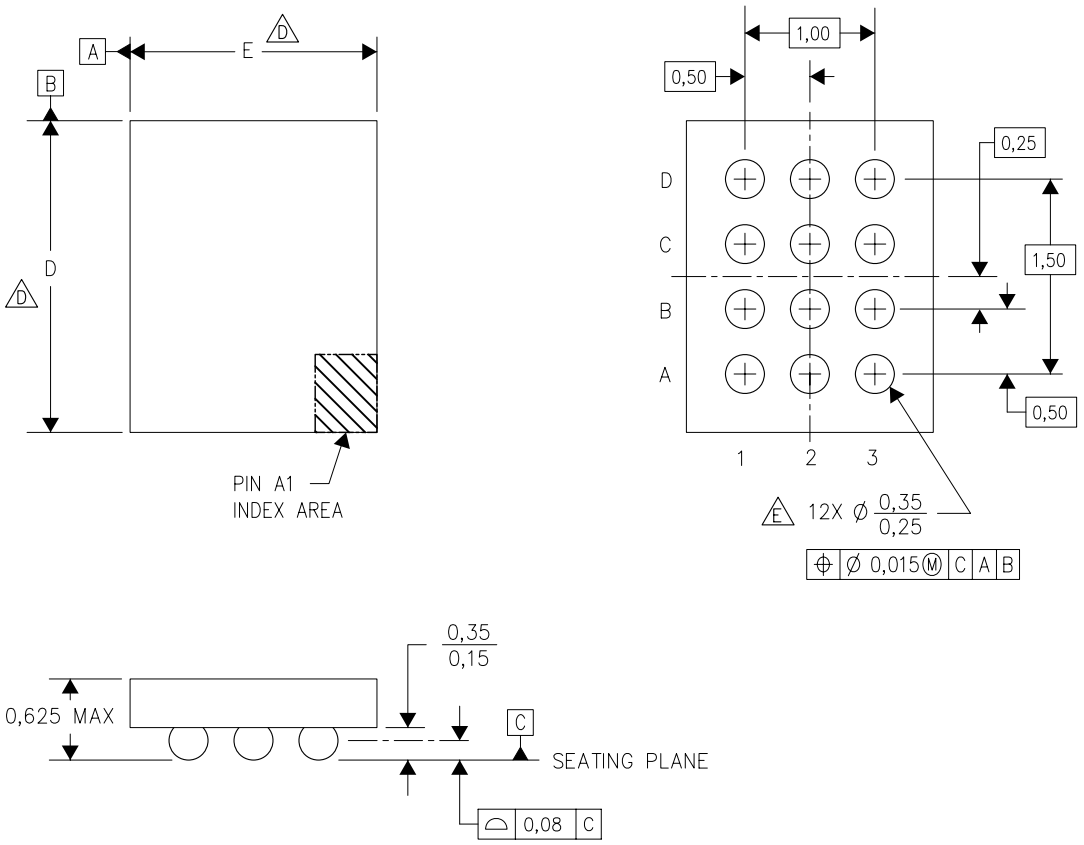

4205059/D 06/08

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. NanoFree™ package configuration.
D. Devices in YZG package can have dimension D ranging from 1.94 to 2.65 mm and dimension E ranging from 1.44 to 2.15 mm. To determine the exact package size of a particular device, refer to the device datasheet or contact a local TI representative.
E. Reference Product Data Sheet for array population. 4 x 3 matrix pattern is shown for illustration only.
F. This package contains lead–free balls. Refer to YEG (Drawing #4204182) for tin–lead (SnPb) balls.

NanoFree is a trademark of Texas Instruments.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Mobile Processors	www.ti.com/omap		
Wireless Connectivity	www.ti.com/wirelessconnectivity		
	TI E2E Community Home Page		e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated