

Q 0,34/4IDC/16-16KU-KU BK

Order No.: 1641879

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1641879>QUICKON conductor connector, 4-pos., connection cross section
0.14-0.34 mm²**Commercial data**

GTIN (EAN)	
sales group	D430
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 49 (PC-2009)

Product notesWEEE/RoHS-compliant since:
12/01/2005

[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data**General characteristics**

Color	black
Connection method	QUICKON connection
Type of connection	IDC connection
Number of positions	4
Tightening torque, union nut	0.8 Nm

Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	0.34 mm ²
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	0.25 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	22

Conductor data

Structure of individual litz in acc. with VDE 0295 / smallest wire diameter	VDE 0295 class 1 to 6 / min. 0.10 mm
Wire insulation material	PVC/PE
Wire diameter including insulation	0.7 mm ... 1.6 mm
External cable diameter	3.5 mm ... 6 mm

Environmental conditions

Degree of protection	IP65/67
Ambient temperature (operation)	-40 °C ... 80 °C (specifications of the cable manufacturer must also be observed)
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Temperature when conductor connected	-5 °C ... 50 °C (specifications of the cable manufacturer must also be observed)

Electrical characteristics

Nominal current I _N	5 A
Rated current	5 A
Rated voltage (III/3)	125 V
Rated voltage (III/2)	200 V
Rated voltage (II/2)	320 V
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV

Mechanical characteristics

QUICKON connectability	max. 10
------------------------	---------

Material data

Contact material	Steel
Contact surface material	Tin-plated
Contact carrier material	PA

Insulating material	PA
Inflammability class acc. to UL 94	V0
Surge voltage category	III
Pollution degree	3

Accessories

Item	Designation	Description
------	-------------	-------------

Protection and sealing elements


1400254	SEALING PLUG 6X16 RD	Closing cap, for closing unused bore holes in multiple seals and cable glands, diameter 6 mm
---------	----------------------	--

Tools

1205862	MICROFOX SC	Diagonal cutter for Cu wire up to 1.5 mm diameter
---------	-------------	---

Diagrams/Drawings

Dimensioned drawing

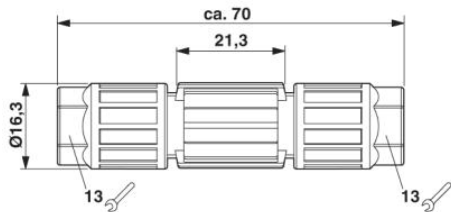

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;