
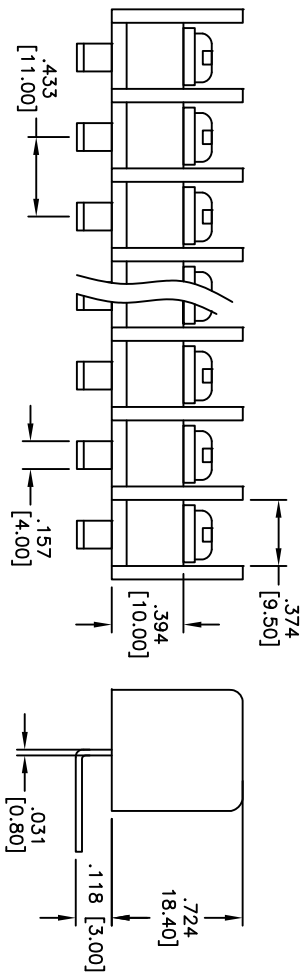


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/20/10	

APPROVED: _____
 DATE: _____ TITLE: _____

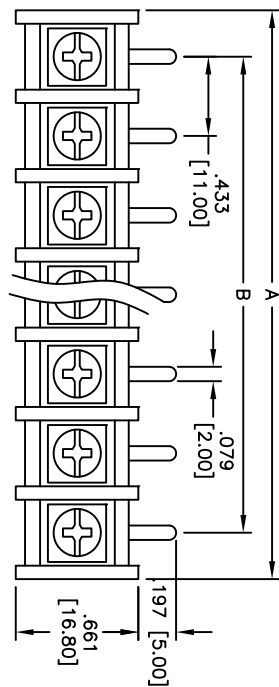

SPECIFICATIONS:
 Material: Nylon66, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass, Tin plated
 Screws: Brass, Nickel plated
 Electrical:
 Operating voltage: 300 VAC max.
 Current rating: 30 Amps max.
 Insulation resistance: 500 Mohms min. @ DC 500V
 Insulation withstands voltage: 2,000 VAC for 1 minute
 Mechanical:
 Wire range: 12 – 22 AWG
 Temperature Rating:
 Operating temperature: -40°C to +120°C
 Environmental:
 Lead free, RoHS compliant

Positions: 2 thru 8, 10
 A = .433 [11.00] x No. of Spaces + .512 [13.00]
 B = .433 [11.00] x No. of Spaces
 Positions: 23 thru 25
 A = .433 [11.00] x No. of Spaces + .591 [15.00]
 B = .433 [11.00] x No. of Spaces
 Positions: 9, 11 thru 22
 A = .433 [11.00] x No. of Spaces + .551 [14.00]
 B = .433 [11.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HILES ±.10
 .XX ±.020 ØXX ±.015
 .XXX ±.015 ØXXX ±.010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

ADAM TECH
 BARRIER STRIP, .433" [11.00] PITCH
 RIGHT ANGLE, PCB THRU HOLE

APPROVALS	DATE
DRAWN AY	12/20/10
CHECKED AC	12/20/10
APPROVED	

SIZE	PART NO.	REV.
X	TBN-XX-03-B	-
REF: S0003IT	SCALE: NTS	SHEET 1 OF 1