BIF1

5-800 MHz Internally Matched IF Amplifier

Device Features



- OIP3 = 44.0 dBm @ 70 MHz
- Gain = 15.2 dB @ 70 MHz
- Output P1 dB = 20.0 dBm @ 70 MHz
- 50 Ω Cascadable
- Patented temperature compensation
- Patented over voltage protection
- Lead-free/RoHS-compliant SOT-89 SMT package

Product Description

BeRex's BIF1 is a high performance InGaP/ GaAs HBT MMIC amplifier, internally matched to 50 Ohms and uses a patented ***temperature compensation*** circuit to provide stable current over the operating temperature range without the need for external components and a patented ***over voltage protection*** circuit to protect a internal device. The BIF1 is designed for high linearity IF amplifier that requires excellent gain, high OIP3 and flatness. It is packaged in a RoHS-compliant with SOT-89 surface mount package.

Applications

- Base station Infrastructure/RFID
- Commercial/Industrial/Military wireless system

Typical Performance[1]


Parameter	Frequency					Unit
	70	140	250	500	800	MHz
Gain	15.2	15.2	15.1	15.0	14.7	dB
S11	-18.0	-18.0	-18.0	-18.0	-19.0	dB
S22	-16.0	-17.0	-16.0	-15.0	-13.0	dB
OIP3[2]	44.0	42.0	40.5	40.0	37.5	dBm
P1dB	20.0	20.8	20.9	21.0	20.7	dBm
Noise Figure	4.2	4.3	4.3	4.4	4.5	dB

[1] Device performance _ measured on a BeRex evaluation board at 25°C, 50 Ω system.

[2] OIP3 _ measured with two tones at an output of 10 dBm per tone separated by 1 MHz.

	Min.	Typical	Max.	Unit
Bandwidth	5		800	MHz
I_C @ (Vc = 5V)	95	105	115	mA
V_C		5.0		V
dG/dT		-0.001		dB/°C
R_{TH}		50		°C/W

Applications Circuit

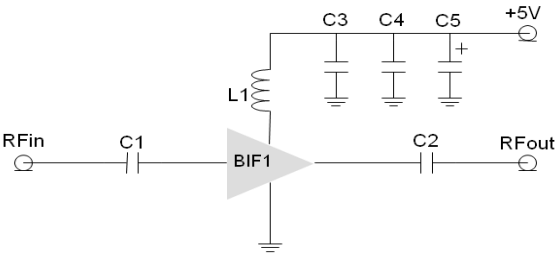

*C1, C2=8200pF ± 5%; C3 = 100 pF ± 5%; C4 = 1000pF ±5%

*C5 = 10uF; L1 = 1200nH ±5%

Absolute Maximum Ratings

Parameter	Rating	Unit
Operating Case Temperature	-40 to +85	°C
Storage Temperature	-55 to +155	°C
Junction Temperature	+220	°C
Operating Voltage	+7.0	V
Supply Current	180	mA
Input RF Power	23	dBm

Operation of this device above any of these parameters may result in permanent damage.

Above 7V, a device goes to protection mode.

Specifications and information are subject to change and products may be discontinued without notice. BeRex is a trademark of BeRex.


All other trademarks are the property of their respective owners. © 2010 BeRex

Rev. E


BIF1

5-800 MHz Internally Matched IF Amplifier

V-I Characteristics

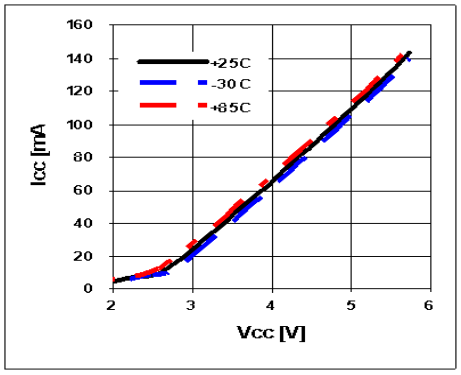


BeRex SOT89 Evaluation Board

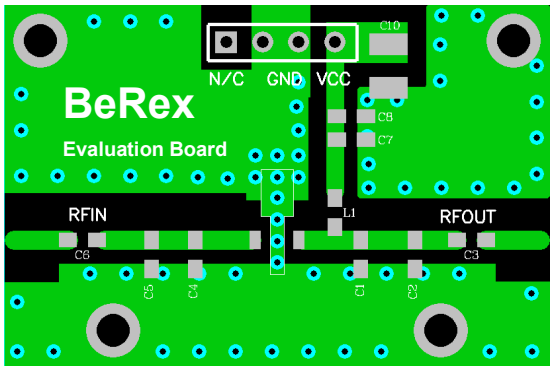

*Dielectric constant _ 4.2 *RF pattern width 52mil *31mil thick FR4 PCB

Typical Device Data

S-parameters (Vc=5V, Ic=105mA, T=25°C)

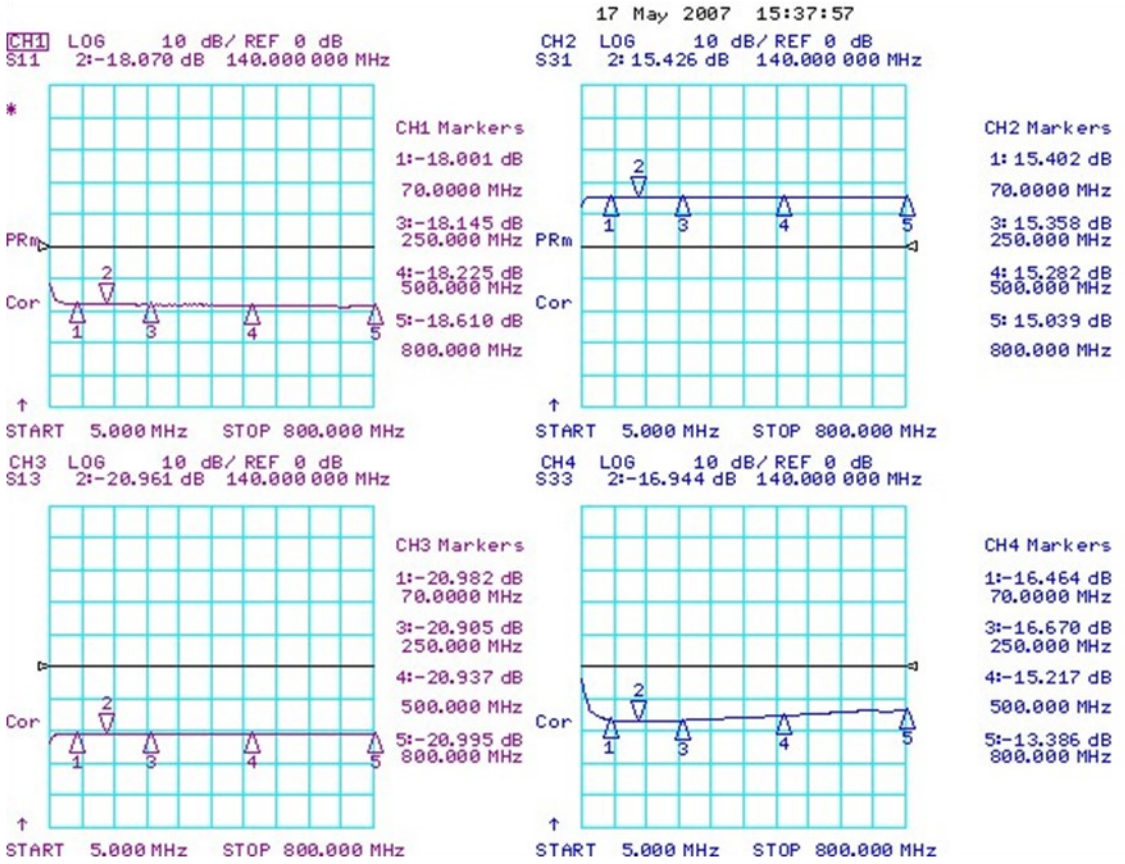

Specifications and information are subject to change and products may be discontinued without notice. BeRex is a trademark of BeRex.

All other trademarks are the property of their respective owners. © 2010 BeRex

Rev. E

BIF1

5-800 MHz Internally Matched IF Amplifier

S-Parameter

(Vdevice = 5.0V, Icc = 105mA, T = 25 °C, calibrated to device leads)

Freq [MHz]	S11 [Mag]	S11 [Ang]	S21 [Mag]	S21 [Ang]	S12 [Mag]	S12 [Ang]	S22 [Mag]	S22 [Ang]
100	0.617	175.8	6.221	176.0	0.086	0.1	0.136	-11.0
500	0.610	158.6	5.549	161.5	0.094	-2.4	0.152	-58.7
1000	0.585	139.9	5.456	147.9	0.086	-4.0	0.194	-101.8
1500	0.567	121.9	5.193	134.2	0.093	-1.6	0.252	-138.3
2000	0.477	103.1	5.197	121.3	0.089	-10.2	0.294	-168.7
2500	0.450	87.8	5.296	111.9	0.089	-5.6	0.354	163.7
3000	0.408	69.5	6.415	94.6	0.094	-11.4	0.429	134.2
3500	0.368	59.9	6.356	71.1	0.091	-11.4	0.495	112.2
4000	0.381	44.8	6.220	50.3	0.101	-17.7	0.554	82.2

Typical Performance (Vd = 5V, Ic = 108mA, T = 25°C)

Freq	MHz	70	140	250	500	800
S21	dB	15.2	15.2	15.1	15.0	14.7
S11	dB	-18	-18	-18	-18	-19
S22	dB	-16	-17	-16	-15	-13
P1	dBm	20.0	20.8	20.9	21.0	20.7
OIP3	dBm	44.0	42.0	40.5	40.0	37.5
NF	dB	4.2	4.3	4.3	4.4	4.5

Typical Performance (Vd = 4.7V, Ic = 87mA, T = 25°C)

Freq	MHz	70	140	250	500	800
S21	dB	15.2	15.2	15.1	15	14.8
S11	dB	-18.6	-20.4	-21.6	-23.3	-25.6
S22	dB	-11.9	-14.6	-15.6	-14.1	-10.9
P1	dBm	18.9	19.5	19.4	19.8	19.3
OIP3	dBm	42.5	38.5	41	38	34.9
NF	dB	4.2	4.3	4.3	4.4	4.5

Typical Performance (Vd = 4.5V, Ic = 79mA, T = 25°C)

Freq	MHz	70	140	250	500	800
S21	dB	15.1	15.1	15.0	14.9	14.9
S11	dB	-18.7	-20.7	-22	-23.8	-26.1
S22	dB	-11.8	-14.5	-15.4	-14	-10.8
P1	dBm	18.6	19.3	19.4	19.3	19.4
OIP3	dBm	42.4	42.0	38.0	38.0	36.0
NF	dB	4.2	4.3	4.3	4.4	4.5

Specifications and information are subject to change and products may be discontinued without notice. BeRex is a trademark of BeRex.

All other trademarks are the property of their respective owners. © 2010 BeRex

Typical Performance (Vd = 4V, Ic = 60mA, T = 25°C)

Freq	MHz	70	140	250	500	800
S21	dB	15	15.1	15	14.8	14.6
S11	dB	-19.4	-21.8	-23.4	-25.5	-28
S22	dB	-11.7	-14.2	-15.1	-13.7	-10.6
P1	dBm	16.4	16.9	17	16.9	16.7
OIP3	dBm	37.5	35.5	36.5	34.5	32.2
NF	dB	4.2	4.3	4.3	4.4	4.5

Typical Performance (Vd = 3.5V, Ic = 40mA, T = 25°C)


Freq	MHz	70	140	250	500	800
S21	dB	14.8	14.9	14.8	14.6	14.4
S11	dB	-20.7	-24.4	-26.9	-30	-32.1
S22	dB	-11.4	-13.6	-14.4	-13.1	-10.2
P1	dBm	13.4	14.1	14.2	13.6	13.3
OIP3	dBm	34	31.5	30.5	29.5	28.6
NF	dB	4.2	4.3	4.3	4.4	4.5


Specifications and information are subject to change and products may be discontinued without notice. BeRex is a trademark of BeRex.


All other trademarks are the property of their respective owners. © 2010 BeRex


Device Performance


OIP3

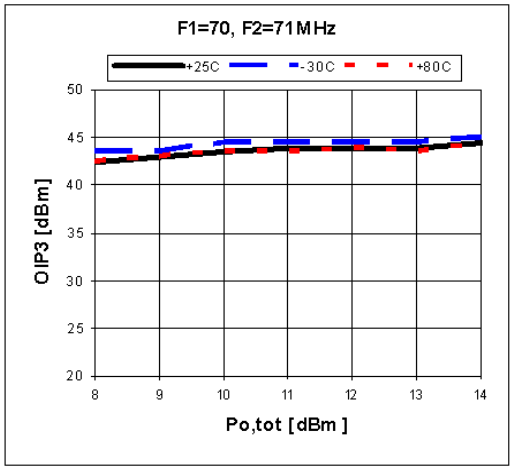

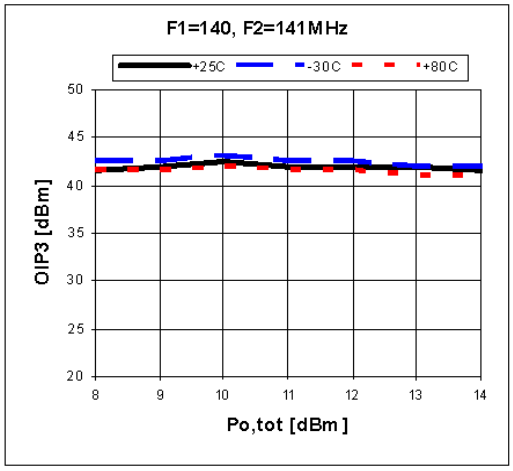

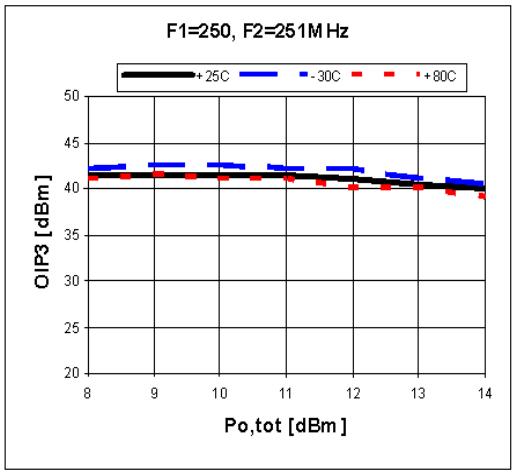

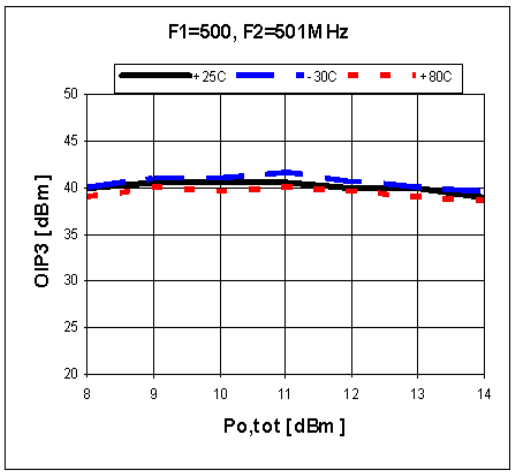


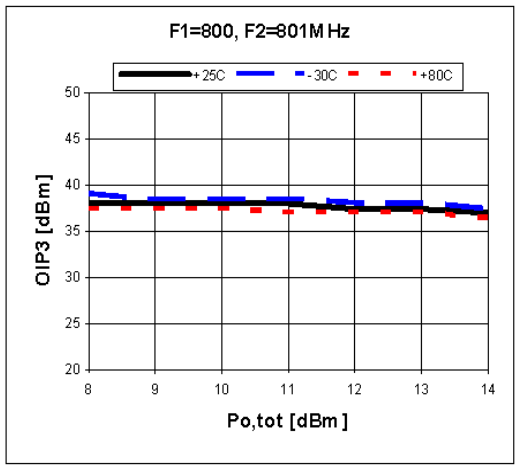



Specifications and information are subject to change and products may be discontinued without notice. BeRex is a trademark of BeRex.


All other trademarks are the property of their respective owners. © 2010 BeRex


ACPR

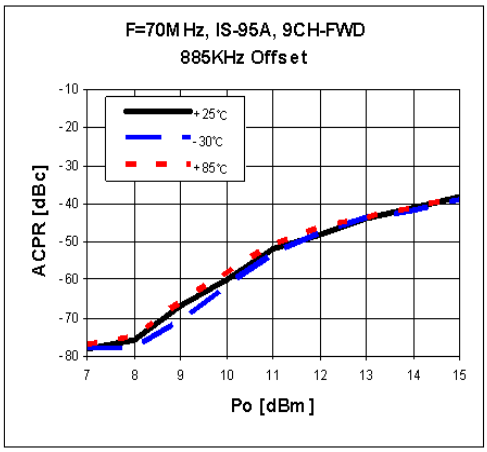

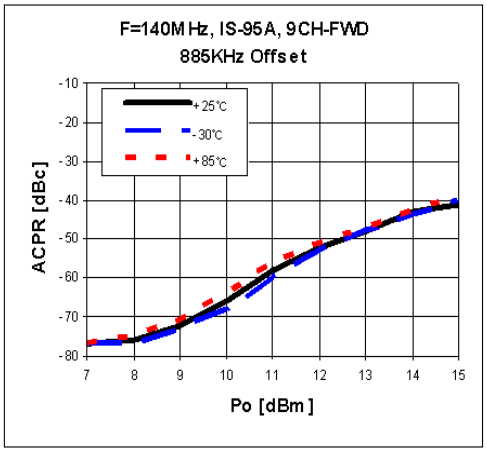

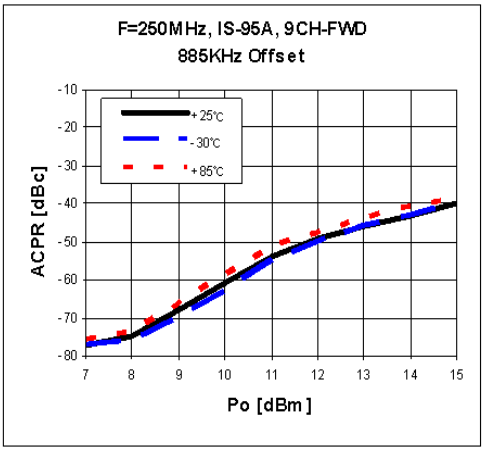

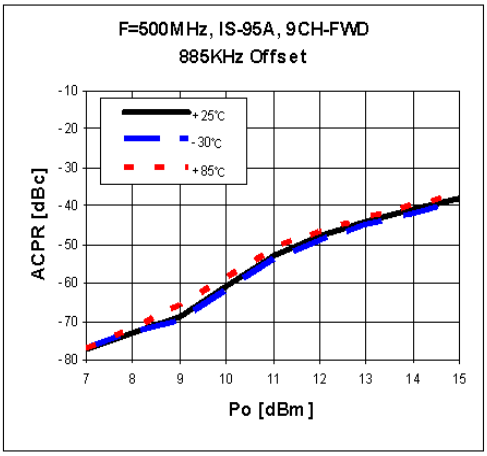


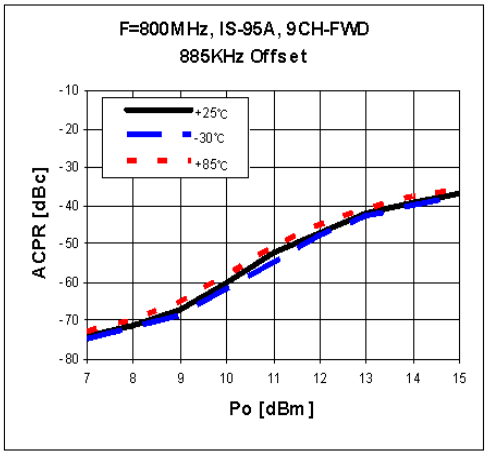


Specifications and information are subject to change and products may be discontinued without notice. BeRex is a trademark of BeRex.


All other trademarks are the property of their respective owners. © 2010 BeRex

ACLR

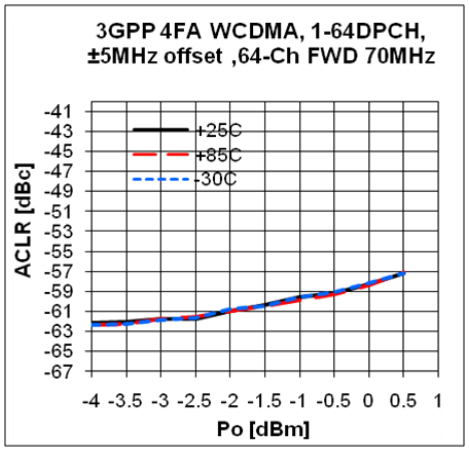


S-Parameters(S11/S22)

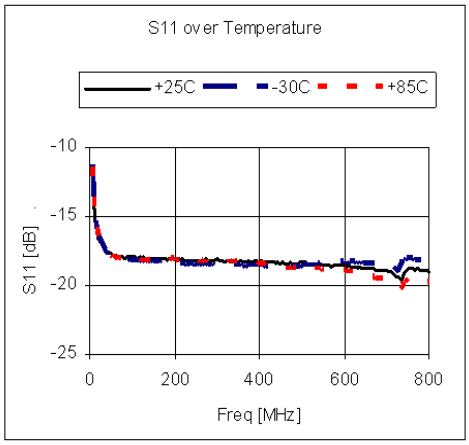

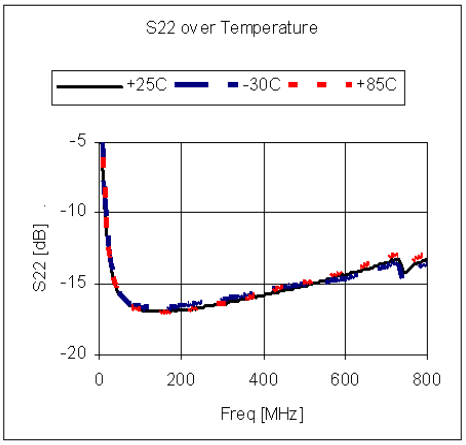

Gain Flatness

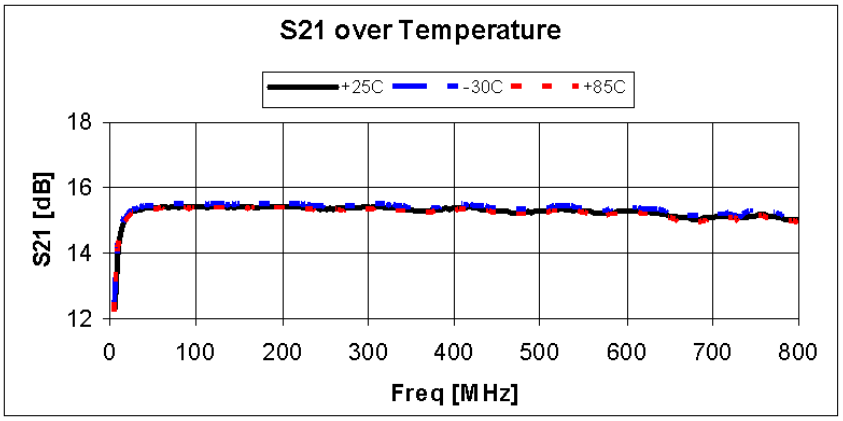


Specifications and information are subject to change and products may be discontinued without notice. BeRex is a trademark of BeRex.

All other trademarks are the property of their respective owners. © 2010 BeRex

BIF1

5-800 MHz Internally Matched IF Amplifier

Package Outline Dimension

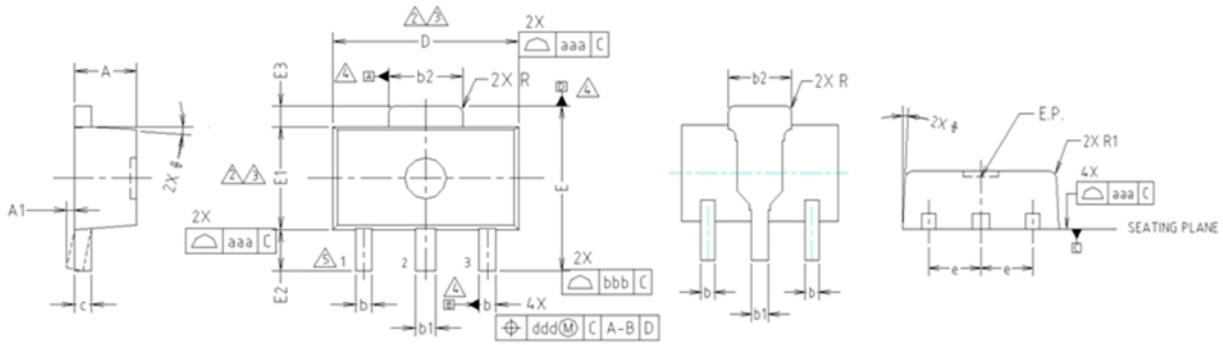

NOTE:


1. DIMENSIONS IN MILLIMETERS.
2. DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.5mm PER END. DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.5mm PER SIDE.
3. DIMENSIONS D AND E1 ARE DETERMINED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
4. DATUMS A, B AND D TO BE DETERMINED 0.10mm FROM THE LEAD TIP.
5. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	1.40	1.50	1.60	
A1	0.00	–	0.10	
b	0.38	0.42	0.48	
b1	0.48	0.52	0.58	
b2	1.79	1.82	1.87	
c	0.40	0.42	0.46	
D	4.40	4.50	4.70	2,3
E	3.70	4.00	4.30	
E1	2.40	2.50	2.70	2,3
E2	0.80	1.00	1.20	
E3	0.40	0.50	0.60	
e	1.50 TYP.			
θ	4° TYP.			
R	0.15 TYP.			
R1	–	–	0.20	

SYMBOL	TOLERANCES OF FORM AND POSITION	NOTE
aaa	0.15	
bbb	0.20	
ccc	0.10	
ddd	0.10	

Suggested PCB Land Pattern and PAD Layout


PCB Land Pattern

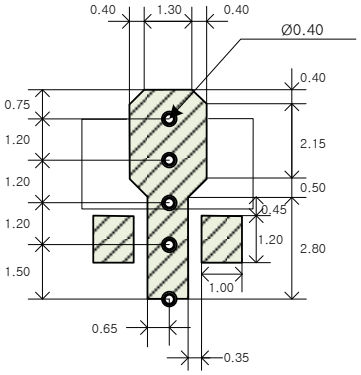

Note : All dimension _ millimeters

PCB lay out _ on BeRex website

PCB Mounting

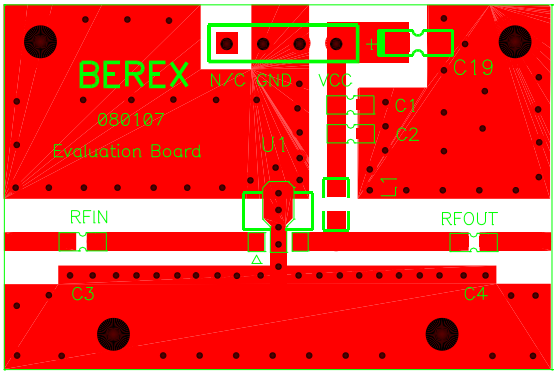


Specifications and information are subject to change and products may be discontinued without notice. BeRex is a trademark of BeRex.

All other trademarks are the property of their respective owners. © 2010 BeRex

BIF1

5-800 MHz Internally Matched IF Amplifier


Package Marking



YY = Year, WW = Working Week,
XX = Wafer No.

Tape & Reel

SOT89



Packaging information:

Tape Width (mm): 12

Reel Size (inches): 7

Device Cavity Pitch (mm): 8

Devices Per Reel: 1000

Lead plating finish

100% Tin Matte finish

(All BeRex products undergoes a 1 hour, 150 degree C, Anneal bake to eliminate thin whisker growth concerns.)

MSL / ESD Rating

ESD Rating:	Class 1C
Value:	**Passes <2000V**
Test:	Human Body Model (HBM)
Standard:	JEDEC Standard JESD22-A114B
MSL Rating:	**Level 1 at +265°C convection reflow**
Standard:	JEDEC Standard J-STD-020



Proper ESD procedures should be followed when handling this device.

NATO CAGE code:

2	**N**	**9**	**6**	**F**

Specifications and information are subject to change and products may be discontinued without notice. BeRex is a trademark of BeRex.
All other trademarks are the property of their respective owners. © 2010 BeRex