




FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mount applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier, majority carrier conduction
- Low power loss, high efficiency
- High surge capability
- and polarity protection applications
- High temperature soldering : 260°C/10 seconds at terminals
- Pb free product at available : 99% Sn above meet RoHS environment substance directive request

MECHANICAL DATA

Case : JEDEC DO-214AA molded plastic
 Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
 Polarity : Color band denotes positive end (cathode)
 Standard Package : 12mm tape (EIA STD EIA-481)
 Weight : 0.003 ounce, 0.093gram

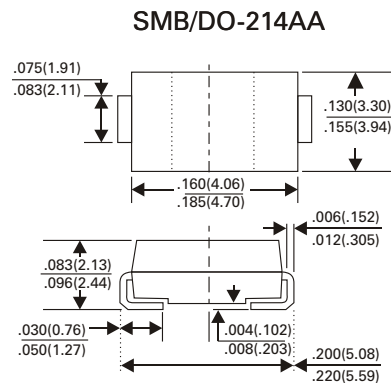

Dimensions in inches and (millimeters)

For use in low voltage high frequency inverters, free wheeling.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified
 Resistive or inductive load

	SYMBOL	SK22B	SK23B	SK24B	SK25B	SK26B	SK28B	SK29B	SK210B	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	90	100	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	63	70	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	90	100	Volts
Maximum Average Forward Rectified Current at T_L (Figure 1)	$I_{(AV)}$	2.0								Amps
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	50								Amps
Maximum Instantaneous Forward Voltage at 2.0A	V_F	0.5		0.7		0.85			Volts	
Maximum DC Reverse Current (NOTE 1) $T_A=25^\circ C$ at Rated DC Blocking Voltage $T_A=100^\circ C$	I_R					0.5				mA
Maximum Thermal Resistance (NOTE 2)	$R_{\theta JA}$	75								$^\circ C / W$
	$R_{\theta JL}$	17								
Typical Junction Capacitance (NOTE 3)	C_J	45				30				pF
Storage and Operating Temperature Range	T_J T_{STG}	-55 to + 150								$^\circ C$

NOTES :

1. Pulse test with $p_w=300 \mu S$, 2% duty cycle
2. Mounted on P.C.B with 8.0mm² (0.13mm thick) copper pad areas

