


SHEET OF




CIRCUIT: DPDT


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3,5-6	OPEN	2-1,5-4

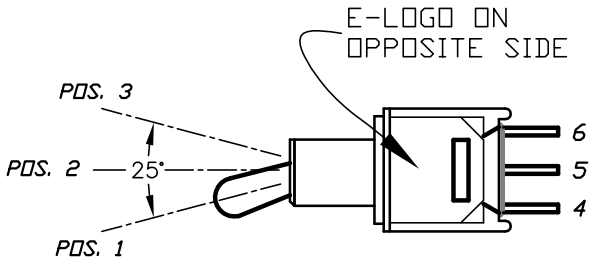


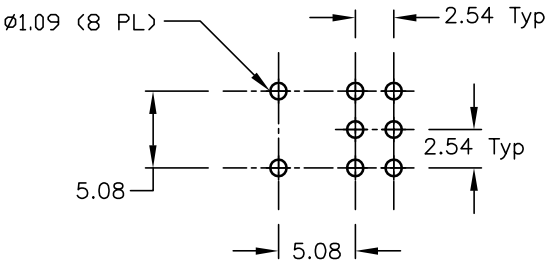

RECOMMENDED P.C.B LAYOUT

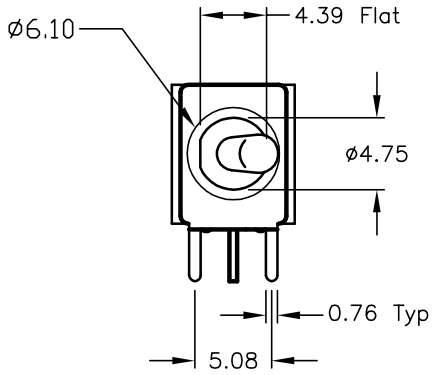

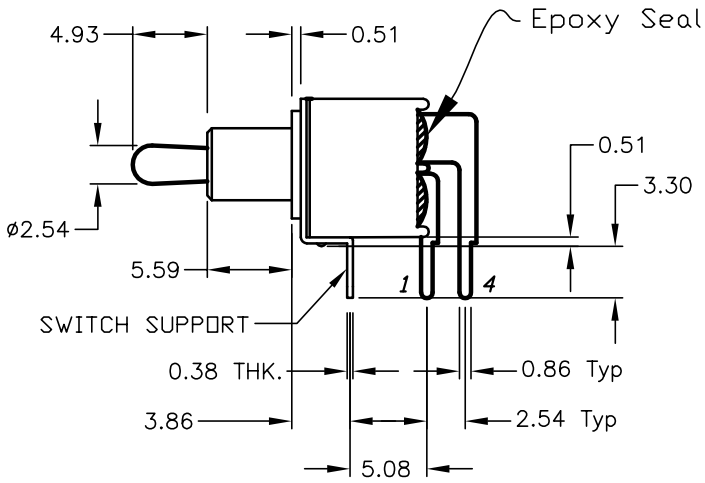

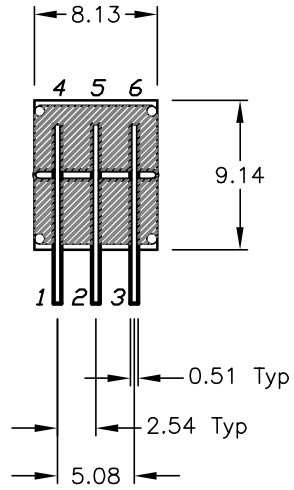

NOTES:
1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 3A @120VAC; 1A @250VAC (B)
▲ 5. FIXED TERMINAL & MOVING CONTACT:
   10 MICRO INCH GOLD PLATE OVER
   400 MICRO INCH SILVER PLATING. (C)
6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: −30°C to 85°C

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	14460	CORRECT PLATING THICKNESS	11/5/04	AR
B	14403	CORRECT RATING NOTE	10/14/04	AR
A	13677	RELEASED FOR PRODUCTION	12/23/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 200MDP1T2B2M6CE

SCALE	DATE	DR	DWG	REV
2:1	12/23/03	AR	T221063	C