
US3AAF - US3MAF

SURFACE MOUNT ULTRA FAST RECTIFIER DIODES

VOLTAGE RANGE: 50 - 1000V
CURRENT: 3.0 A




Features

- Glass Passivated Die Construction
- Ideally Suited for Automatic Assembly
- Low Forward Voltage Drop, High Efficiency
- Low Power Loss
- Ultra-Fast Recovery Time
- Plastic Case Material has UL Flammability Classification Rating 94V-O

Mechanical Data

- Case: SMAF,Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity:Color band denotes cathode end
- Mounting Position:Any
- Weight:0.0018 ounce, 0.064 grams

RoHS COMPLIANT

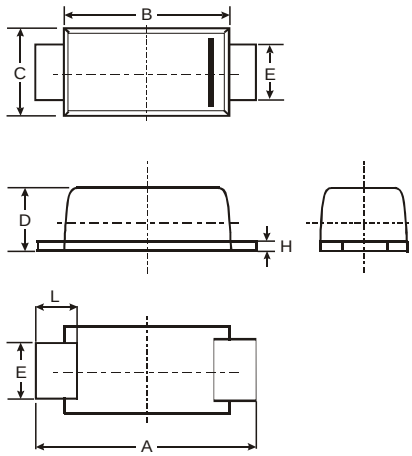

SMAF			
Dim	Min	Max	Typ
A	4.75	4.85	4.80
B	3.68	3.72	3.70
C	2.57	2.63	2.60
D	0.097	1.03	1.00
E	1.38	1.42	1.40
H	0.13	0.17	0.15
L	0.63	0.67	0.65
All Dimensions in mm			

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	US3AAF	US3BAF	US3DAF	US3GAF	US3JAF	US3KAF	US3MAF	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 0.375″(9.5mm) lead length at T_A=55℃	$I_{(AV)}$	3.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	100.0							A
Maximum instantaneous forward voltage at 3.0A	V_F	1.0			1.30	1.70			V
Maximum DC reverse current T_A=25℃ at rated DC blocking voltage T_A=100℃	I_R	5.0 250.0							μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	50				75			ns
Typical junction capacitance (NOTE 2)	C_J	75							pF
Typical thermal resistance (NOTE 3)	$R_{\theta JL}$	15.0							°C/W
Operating junction and storage temperature range	T_J,T_{STG}	-65 to +150							°C

Note:1.Reverse recovery condition I_F=0.5A,I_R=1.0A,Irr=0.25A
2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3.Thermal resistance from junction to lead and from junction to ambient with P.C.B mounted on 0.3 x 0.3" (8.0 x 8.0 mm) Copper pad area

RATINGS AND CHARACTERISTIC CURVES US3AAF THRU US3MAF

FIG. 1- FORWARD CURRENT DERATING CURVE

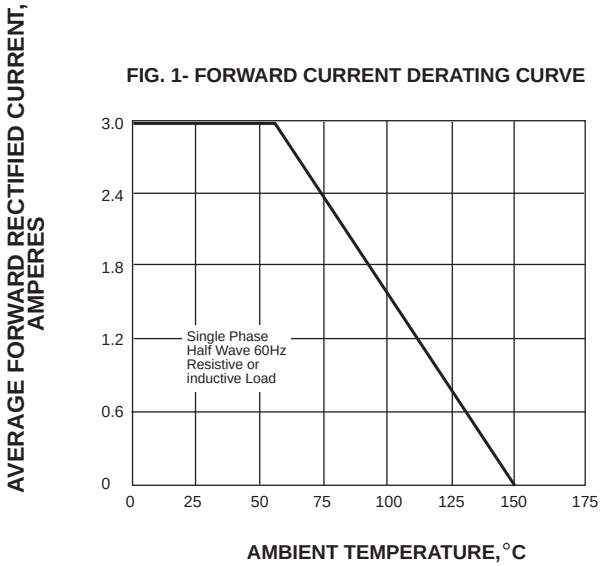


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

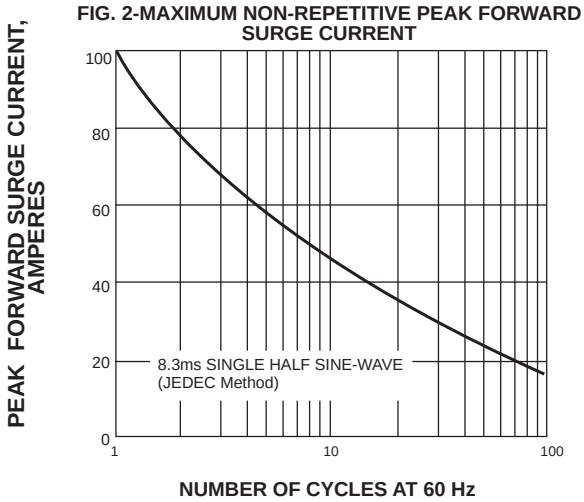


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

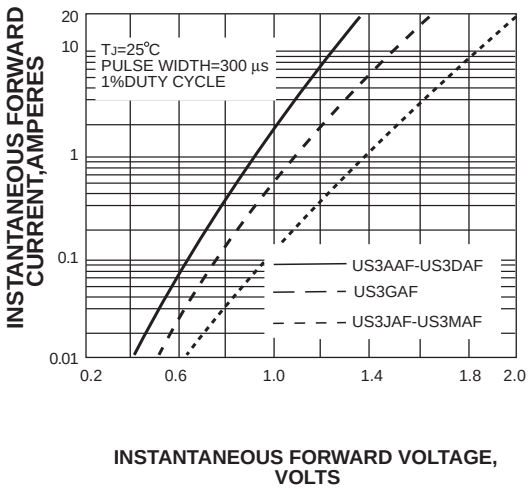


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

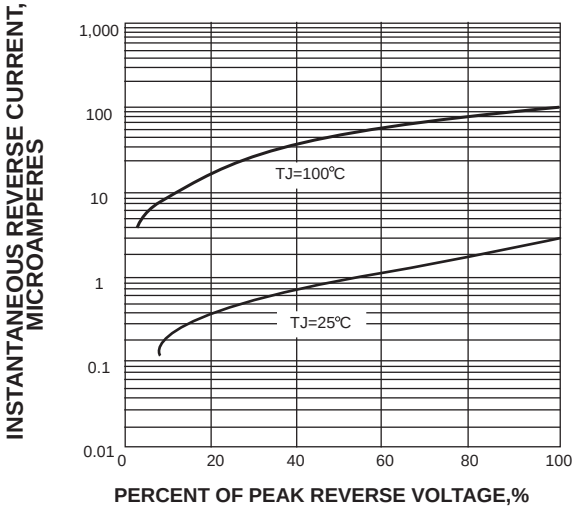


FIG. 5-TYPICAL JUNCTION CAPACITANCE

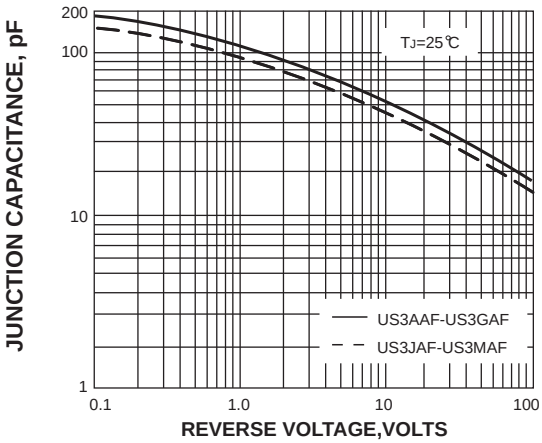


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

