
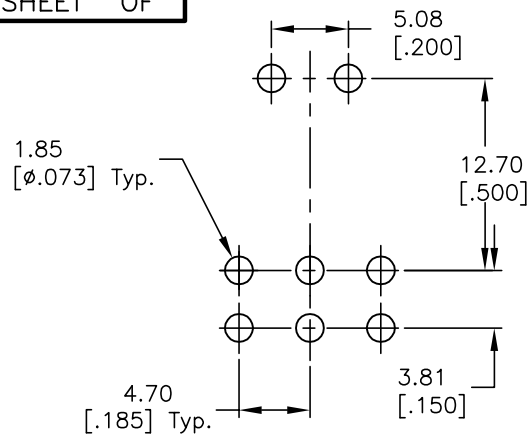






RECOMMEND P.C.B. LAYOUT

CIRCUIT: DPDT
CONTACT CONFIGURATION



SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3, 5-6	OPEN	2-1, 5-4

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 0.4 VOLT-AMPS MAX. @ 20V MAX AC OR DC
- FIXED TERM. & MOVING CONTACT:
Copper Alloy W/GOLD PLATE OVER NICKLE PLATE.
- ELECTRICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
- INSULATION RESISTANCE: 1,000M OHM MIN.
- DIELECTRIC STRENGTH: 1,000V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to +85°C.
- ▲ DENOTES CRITICAL PARAMETER.

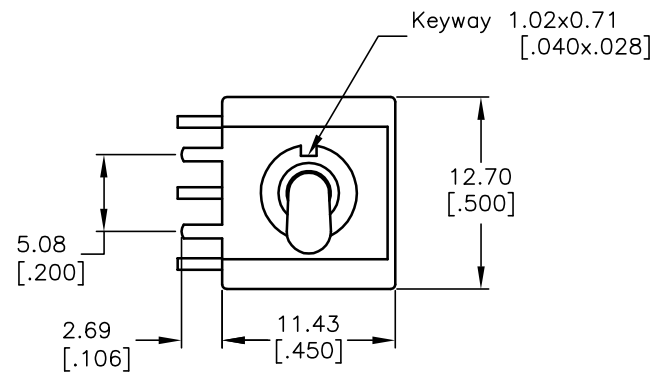

VIEW A-A

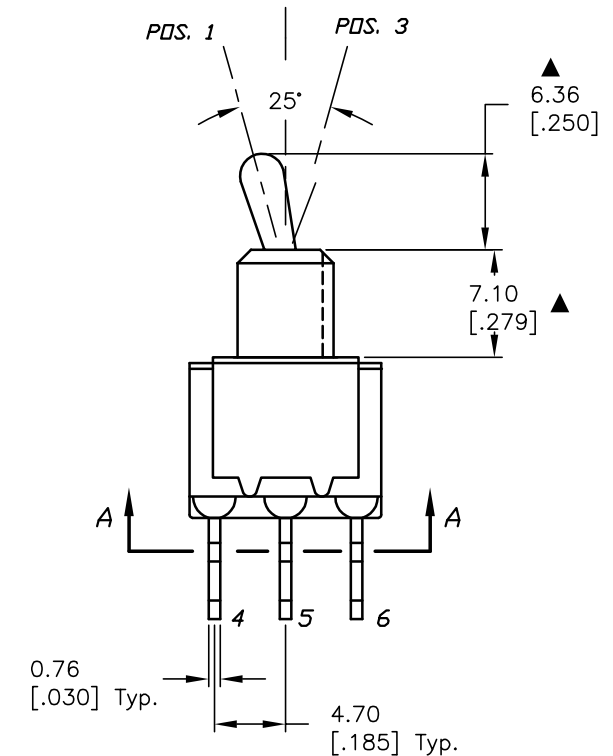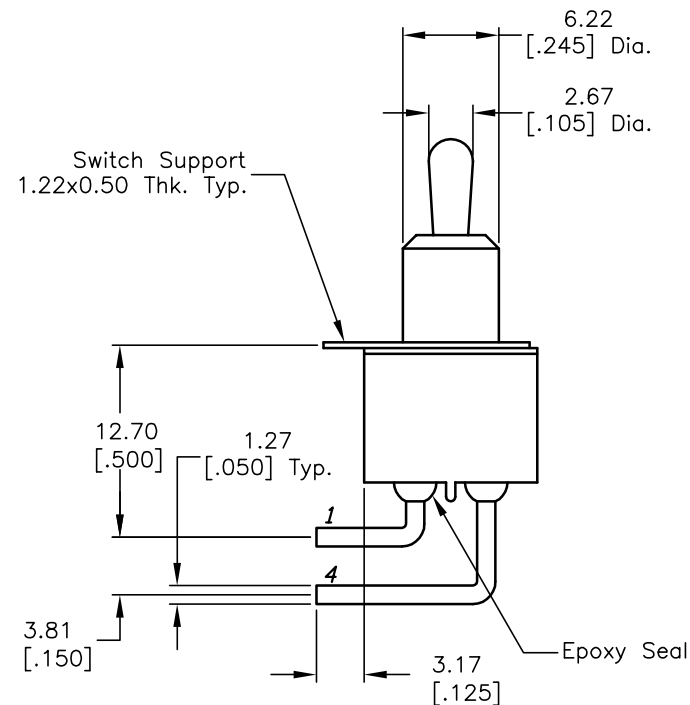**E-SWITCH®**

TITLE

100DP1T2B4M6RE

SCALE

2:1

DATE

12/4/03

DR

AR

DWG

T121044

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED