


SMB10J Series

Description


The SMB10J series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- Available in uni-directional and bi-directional
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Case: DO-214AA (SMB)
- 1000 W peak pulse power capability with a10/1000 us waveform, repetitive rate (duty cycle):0.01 %
- Polarity: For uni-directional types the color band denotes cathode end, no marking on bi-directional types

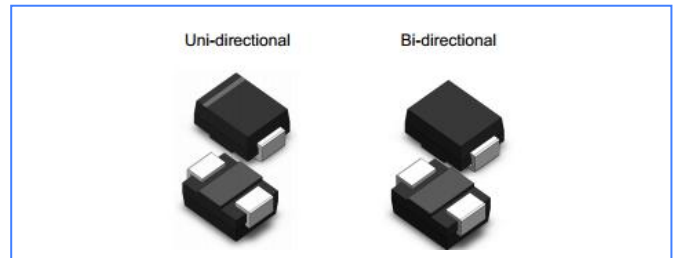

Functional Diagram

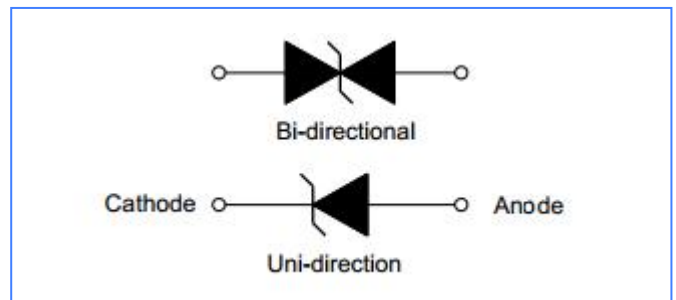

Applications

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, and telecommunication

Maximum Ratings (TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Minimum Peak Pulse Power Dissipation (T = 1 ms)	P _{PK}	1000	Watts
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	100	Amps
Steady State Power Dissipation @ TL = 75 °C	P _D	5	Watts
Maximum Instantaneous Forward Voltage @ I _{PP} = 35 A (For Unidirectional Units Only)	V _F	3.5/5.0	Volts
Operating Temperature Range	T _J	-55 to +150	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C



Note:

1. Non-repetitive current pulse per Fig.5 and derated above TA= 25 °C per Fig.1
2. Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum
3. VF<3.5V for devices of VBR<50V..

Electrical Characteristics (TA = 25 °C unless otherwise noted)

Part Number (Bi)	Part Number (Uni)	MARKING		Reverse Stand off Voltage V _R (Volts)	Breakdown Voltage V _{BR} (Volts)@I _T		Test Current I _T (mA)	Maximum Reverse Leakage I _R @ V _R (μA)	Maximum Peak Pulse Current I _{pp} (A)	Maximum Clamping Voltage V _C @ I _{pp} (V)
		BI	UNI		Min .V	Max .V				
SMB10J5.0CA	SMB10J5.0A	AE	KE	5.0	6.40	7.00	10	800	108.70	9.2
SMB10J6.0CA	SMB10J6.0A	AG	KG	6.0	6.67	7.37	10	800	97.09	10.3
SMB10J6.5CA	SMB10J6.5A	AK	KK	6.5	7.22	7.98	10	500	89.29	11.2
SMB10J7.0CA	SMB10J7.0A	AM	KM	7.0	7.78	8.60	10	200	83.33	12.0
SMB10J7.5CA	SMB10J7.5A	AP	KP	7.5	8.33	9.21	1	100	77.52	12.9
SMB10J8.0CA	SMB10J8.0A	AR	KR	8.0	8.89	9.83	1	50	73.53	13.6
SMB10J8.5CA	SMB10J8.5A	AT	KT	8.5	9.44	10.4	1	10	69.44	14.4
SMB10J9.0CA	SMB10J9.0A	AV	KV	9.0	10.0	11.1	1	5	64.94	15.4
SMB10J10CA	SMB10J10A	AX	KX	10	11.1	12.3	1	5	58.82	17.0
SMB10J11CA	SMB10J11A	AZ	KZ	11	12.2	13.5	1	5	54.95	18.2
SMB10J12CA	SMB10J12A	BE	LE	12	13.3	14.7	1	5	50.25	19.9
SMB10J13CA	SMB10J13A	BG	LG	13	14.4	15.9	1	1	46.51	21.5
SMB10J14CA	SMB10J14A	BK	LK	14	15.6	17.2	1	1	43.10	23.2
SMB10J15CA	SMB10J15A	BM	LM	15	16.7	18.5	1	1	40.98	24.4
SMB10J16CA	SMB10J16A	BP	LP	16	17.8	19.7	1	1	38.46	26.0
SMB10J17CA	SMB10J17A	BR	LR	17	18.9	20.9	1	1	36.23	27.6
SMB10J18CA	SMB10J18A	BT	LT	18	20.0	22.1	1	1	34.25	29.2
SMB10J19CA	SMB10J19A	BB	LB	19	21.1	23.3	1	1	32.49	30.8
SMB10J20CA	SMB10J20A	BV	LV	20	22.2	24.5	1	1	30.86	32.4
SMB10J22CA	SMB10J22A	BX	LX	22	24.4	26.9	1	1	28.17	35.5
SMB10J24CA	SMB10J24A	BZ	LZ	24	26.7	29.5	1	1	25.71	38.9
SMB10J26CA	SMB10J26A	CE	ME	26	28.9	31.9	1	1	23.75	42.1
SMB10J28CA	SMB10J28A	CG	MG	28	31.1	34.4	1	1	22.03	45.4
SMB10J30CA	SMB10J30A	CK	MK	30	33.3	36.8	1	1	20.66	48.4
SMB10J33CA	SMB10J33A	CM	MM	33	36.7	40.6	1	1	18.76	53.3
SMB10J36CA	SMB10J36A	CP	MP	36	40.0	44.2	1	1	17.21	58.1
SMB10J40CA	SMB10J40A	CR	MR	40	44.4	49.1	1	1	15.50	64.5
SMB10J43CA	SMB10J43A	CT	MT	43	47.8	52.8	1	1	14.41	69.4
SMB10J45CA	SMB10J45A	CV	MV	45	50.0	55.3	1	1	13.76	72.7
SMB10J48CA	SMB10J48A	CX	MX	48	53.3	58.9	1	1	12.92	77.4
SMB10J51CA	SMB10J51A	CZ	MZ	51	56.7	62.7	1	1	12.14	82.4
SMB10J54CA	SMB10J54A	DE	NE	54	60.0	66.3	1	1	11.48	87.1
SMB10J58CA	SMB10J58A	DG	NG	58	64.4	71.2	1	1	10.68	93.6

I-V Curve Characteristics

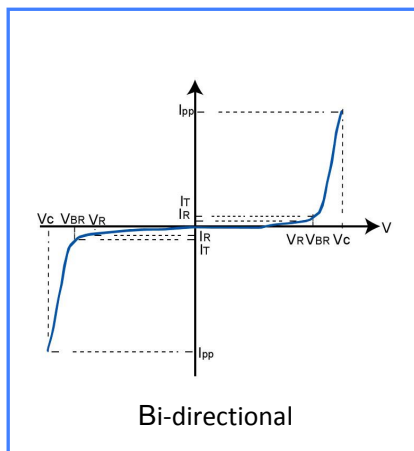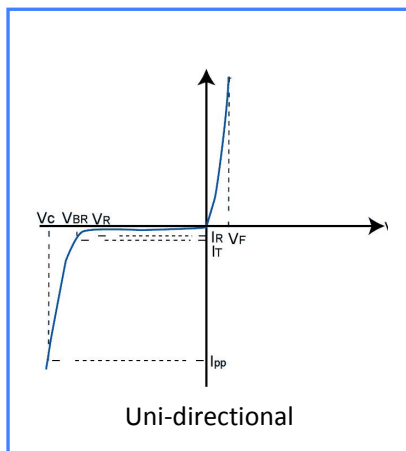

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T (Test Current)

Rating & Characteristic Curves

Figure 1- Pulse Derating Curve

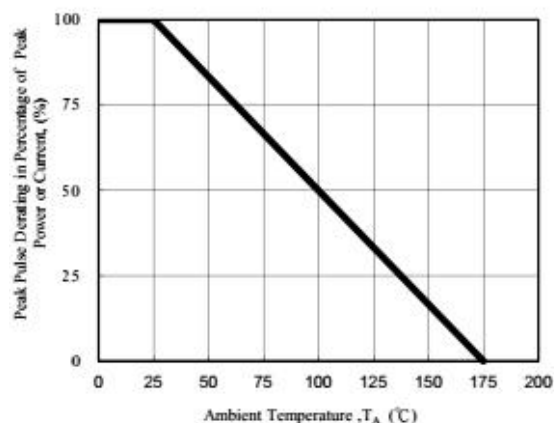


Figure 2- Maximum Non-Repetitive Surge Current

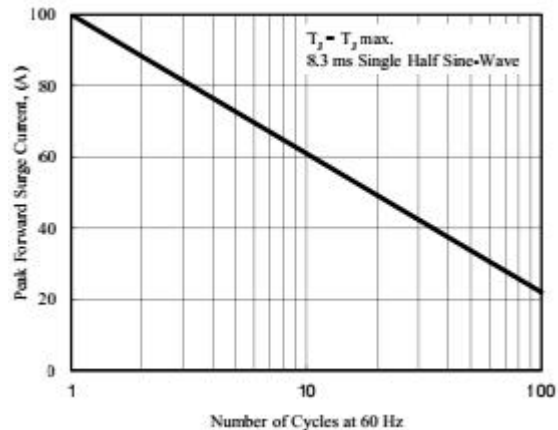


Figure 3- Steady State Power Derating Curve

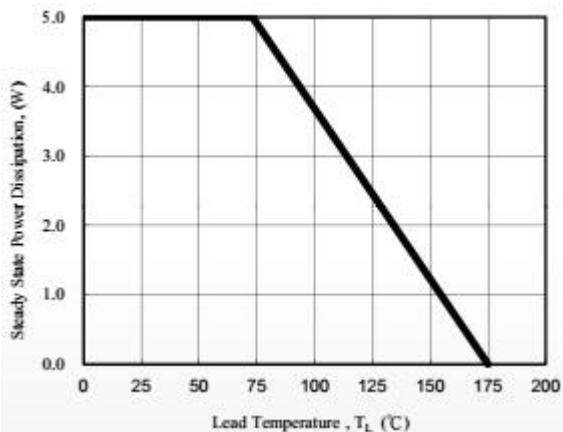


Figure 4- Peak Pulse Power Rating Curve

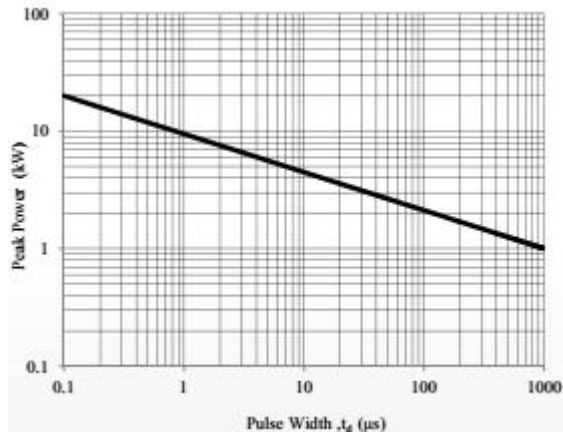


Figure 5- Pulse Waveform



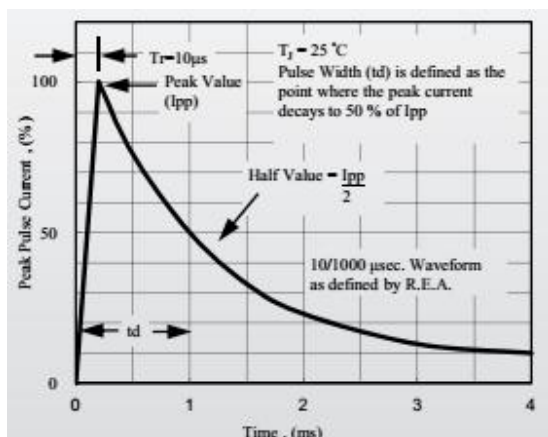



Figure 5- Typical Junction Capacitance

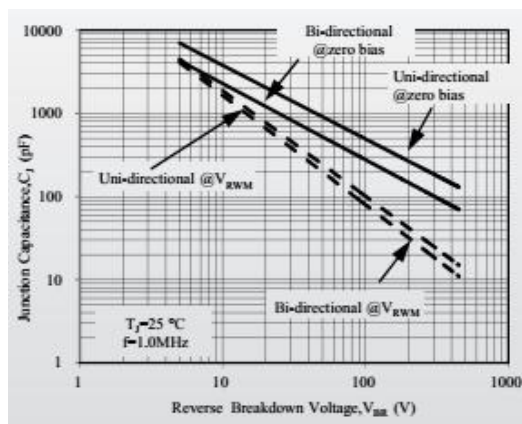

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

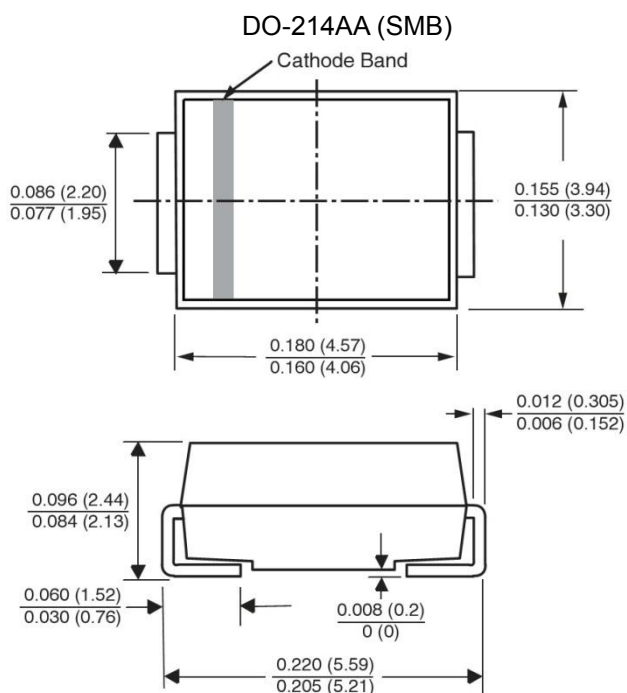

Mounting Pad Layout

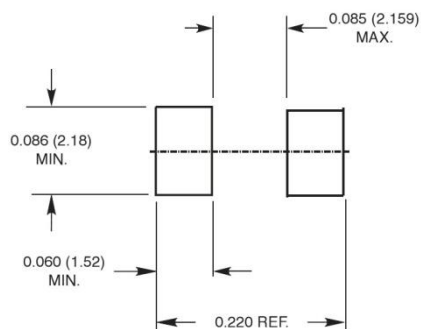

Disclaimer

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.