
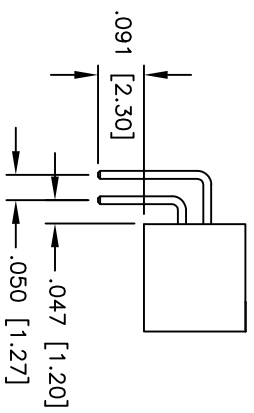
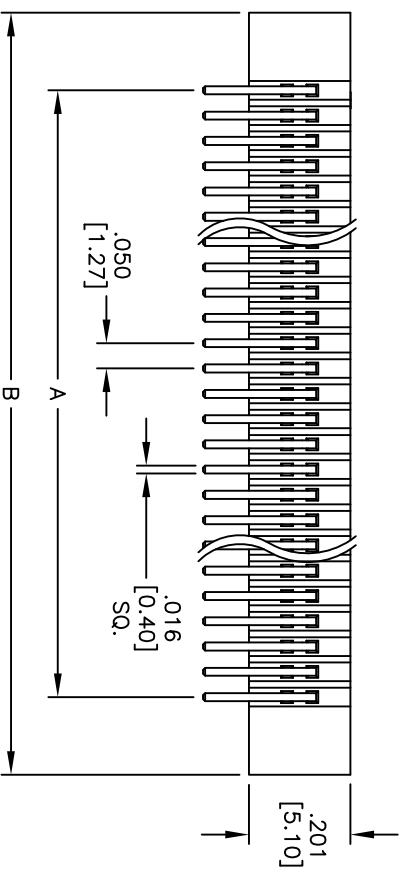
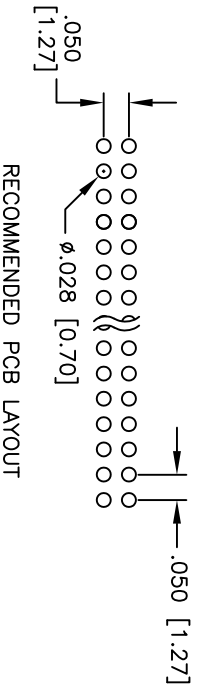


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/16/10	

APPROVED: _____
 DATE: _____ TITLE: _____

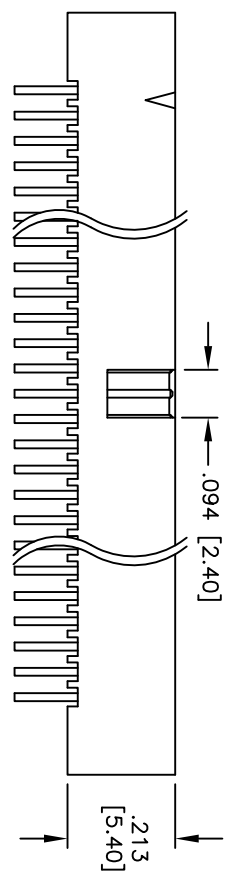

SPECIFICATIONS:
 Material: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold flash over Nickel underplate overall

Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
 Operating temperature: -40°C to +105°C



Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

Positions: 6, 8, 10, 12, 14, 16, 20, 26, 30,
 34, 40, 44, 50, 60, 64, 68, 80, 100
 A = .050 [1.27] x No. of Spaces
 B = .050 [1.27] x No. of Spaces + .298 [7.57]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	MM	HOLES	DATE
.X	± .10	ØXX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" X .050" BOX HEADER, GOLD PLATED,
 RIGHT ANGLE MOUNT, PCB TYPE

APPROVALS	DATE
DRAWN DY	4/16/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	HBHR-B-XX-HG	-

REF: S0004TT SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1