GLASS PASSIVATED RECTIFIERS

VOLTAGE RANGE: 50 --- 600 V
CURRENT: 2.0 A


FEATURES

- ◇ Low cost
- ◇ Glass passivated junction
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with alcohol,Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case:JEDEC DO--15,molded plastic
- ◇ Terminals: Axial lead ,solderable per MIL- STD-202,Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.014 ounces,0.39 grams
- ◇ Mounting position: Any

DO - 15

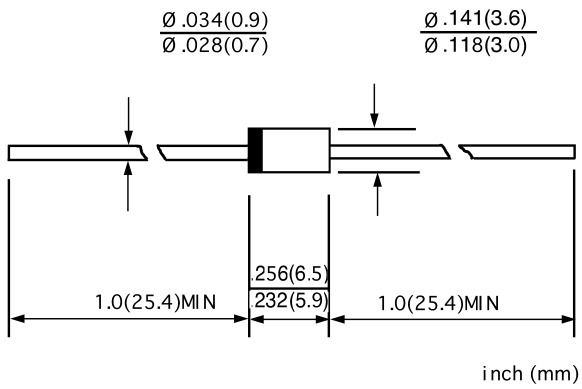

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.

Single phase,half wave,60 Hz,resistive or inductive load. For capacitive load,derate by 20%.

		SF21G	SF22G	SF23G	SF24G	SF25G	SF26G	SF27G	SF28G	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	500	600	V
Maximum average forward rectified current 9.5mm lead length, @T_A=75℃	$I_{F(AV)}$	2.0								A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @T_J=125℃	I_{FSM}	50								A
Maximum instantaneous forward voltage @ 2.0A	V_F	0.95				1.3		1.7		V
Maximum reverse current @T_A=25℃	I_R	5.0								μA
at rated DC blocking voltage @T_A=125℃		50.0								
Maximum reverse recovery time (Note1)	t_{rr}	35								ns
Typical junction capacitance (Note2)	C_J	60				30				pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	20								℃/W
Operating junction temperature range	T_J	- 55 ----- + 175								℃
Storage temperature range	T_{STG}	- 55 ----- + 175								℃


NOTE: 1. Measured with I_F=0.5A, I_R=1A, I_{rr}=0.25A.

2. Measured at 1.0MH_Z and applied reverse voltage of 4.0V DC.


3. Thermal resistance from junction to ambient.

www.galaxycn.com

FIG.1 -- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

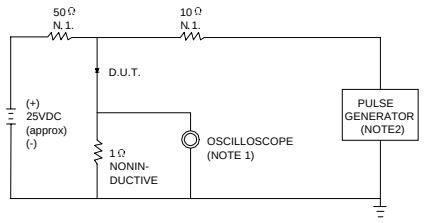


NOTES:1.RISE TIME = 7ns MAX.INPUT IMPEDANCE = 1MΩ.22pF.
2.RISE TIME =10ns MAX.SOURCE IMPEDANCE=50 Ω.

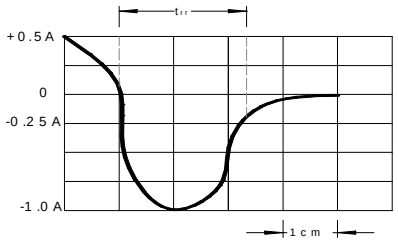


SET TIME BASE FOR 10 ns/cm

FIG.2 -- TYPICAL FORWARD CHARACTERISTIC

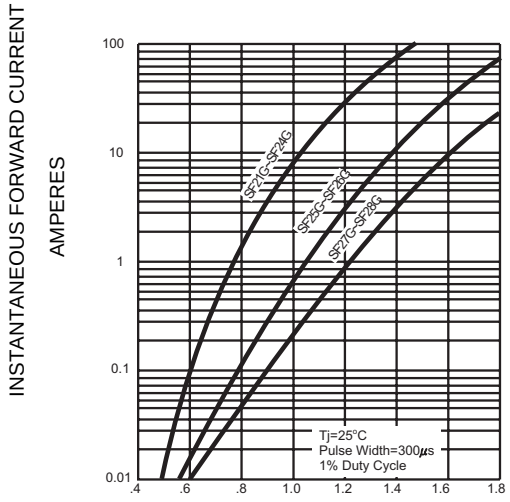


INSTANTANEOUS FORWARD VOLTAGE, VOLTS

FIG.3 -- FORWARD DERATING CURVE

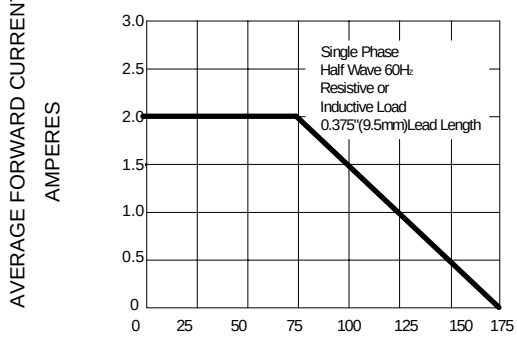


AMBIENT TEMPERATURE, ℃

FIG.4 -- TYPICAL JUNCTION CAPACITANCE

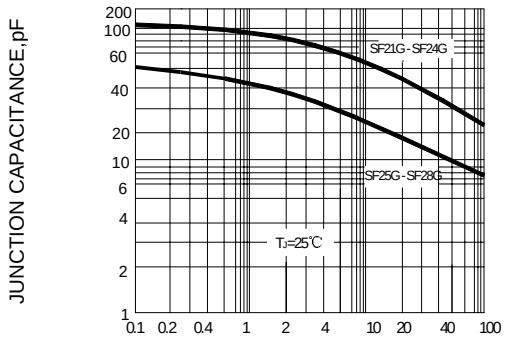

REVERSE VOLTAGE,VOLTS

FIG.5 -- PEAK FORWARD SURGE CURRENT

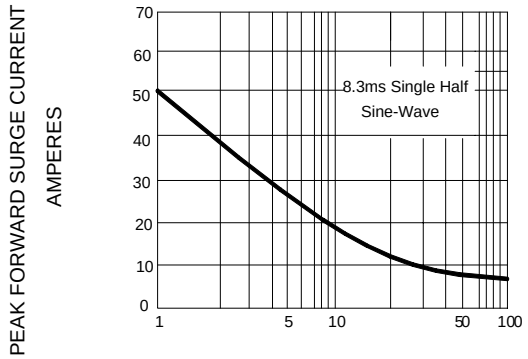

NUMBER OF CYCLES AT 60Hz