

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [41661-0001](#)
Status: **Active**
Overview: [KK® Interconnect System - Molex](#)
Description: [KK® 396 Breakaway Header, Vertical, 2 Circuits, 0.38µm Gold \(Au\) Selective Plating](#)

Documents:

[3D Model](#) [Product Specification PS-08-50 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [41661](#)
 Application Board-to-Board, Power, Wire-to-Board
 Application Tooling Part Link 11-20-0901
 Overview [KK® Interconnect System - Molex](#)
 Product Name [KK® 396](#)
 UPC 800753929425

Physical

Breakaway Yes
 Circuits (Loaded) 2
 Circuits (maximum) 2
 Color - Resin Black
 Durability (mating cycles max) 50
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Gold
 Material - Plating Termination Gold
 Material - Resin Polyester
 Net Weight 0.561/g
 Number of Rows 1
 Orientation Vertical
 PC Tail Length 4.37mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 3.96mm
 Pitch - Termination Interface 3.96mm
 Plating min - Mating 0.381µm
 Polarized to Mating Part Yes
 Polarized to PCB No
 Shrouded Partial
 Stackable No
 Temperature Range - Operating See Product Specification
 Termination Interface: Style Through Hole

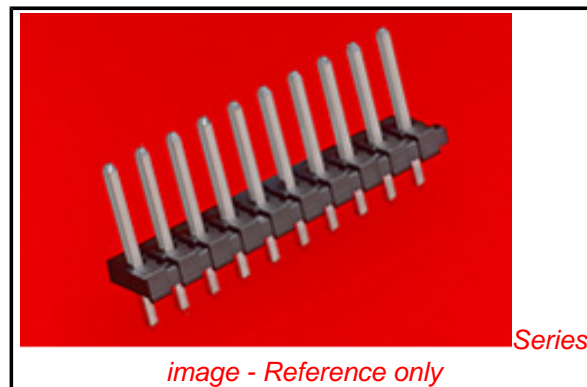


image - Reference only

EU RoHS

**ELV and RoHS
 Compliant**
**REACH SVHC
 Contains SVHC: No
 Low-Halogen Status
 Not Low-Halogen**

China RoHS



**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
 non-product compliance questions.

Search Parts in this Series

[41661Series](#)

Mates With

[2139](#) [KK® Crimp Housing](#), [41695](#) [KK® Crimp Housing](#), [6442](#) [KK® Crimp Housing](#), [2145](#) [PCB Connector](#), [41815](#) [PCB Connector](#), [3069](#) [KK® Crimp Housing](#)

Electrical

Current - Maximum per Contact 7A
Voltage - Maximum 250V

Solder Process Data

Duration at Max. Process Temperature (seconds) 5
Lead-free Process Capability Wave Capable (TH only)
Max. Cycles at Max. Process Temperature 1
Process Temperature max. C 235

Material Info

Old Part Number A-41661-B02A208

Reference - Drawing Numbers

Product Specification PS-08-50
Sales Drawing SD-41661-001

This document was generated on 08/18/2014

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION