

ES3A THRU ES3J

Super Fast Recovery Rectifier Diode


Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- Super fast reverse recovery time
- High forward surge capability
- Meets MSL level 1, per J-STD-020,LF maximum peak of 260 °C



Typical Application

For use in high frequency rectification of power supply, inverters, converters, and freewheeling diodes for consumer and telecommunication.



Mechanical Data

- Package: DO-214AB(SMC)
Molding compound meets UL 94 V-0 flammability rating,RoHS-compliant
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Polarity: Cathode line denotes the cathode end

Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	Symbol	Unit	Conditions	ES3							
				A	B	C	D	F	G	H	J
Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	150	200	300	400	500	600
Average Forward Current	$I_{F(AV)}$	A	60Hz Half-sine wave, Resistance load, $T_L=100^{\circ}C$	3.0							
Surge(Nonrepetitive)Forward Current	I_{FSM}	A	60HZ Half-sine wave, 1 cycle, $T_a=25^{\circ}C$	100							
Storage Temperature	T_{stg}	$^{\circ}C$		-55 ~ +150							
Junction Temperature	T_j	$^{\circ}C$		-55 ~ +150							

Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	Symbol	Unit	Conditions		ES3							
					A	B	C	D	F	G	H	J
Peak Forward Voltage	V _{FM}	V	I _F =3.0A		0.95				1.3		1.7	
Peak Reverse Current	I _{RRM1}	μA	V _{RM} =V _R RM	Ta=25℃	10							
	Ta=125℃			500								
Maximum reverse recovery time	T _{rr}	ns	I _F =0.5A,I _R =1.0A,I _{rr} =0.25A		35							
Thermal Resistance(Typical)	R _{θJ-A}	℃/W	Between junction and ambient		47 ¹⁾							
	R _{θJ-L}		Between junction and terminal		12 ¹⁾							

Notes:

¹⁾ Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas



ES3A THRU ES3J

■ Characteristics (Typical)

FIG1: Forward Current Derating Curve

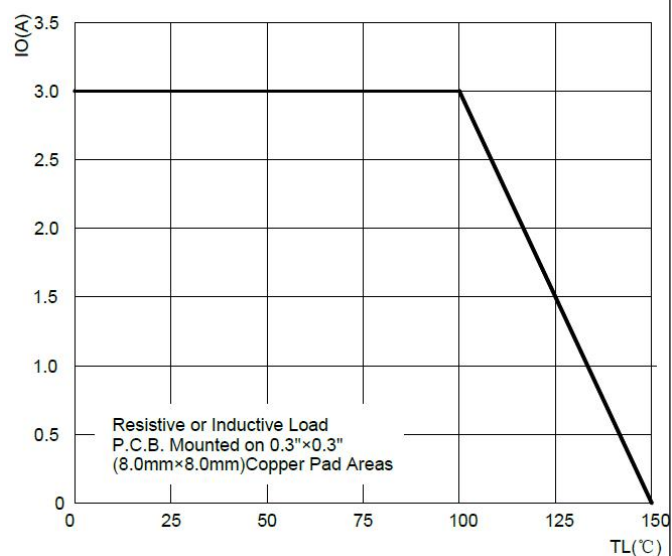


FIG2: Maximum Non-Repetitive Forward Surge Current

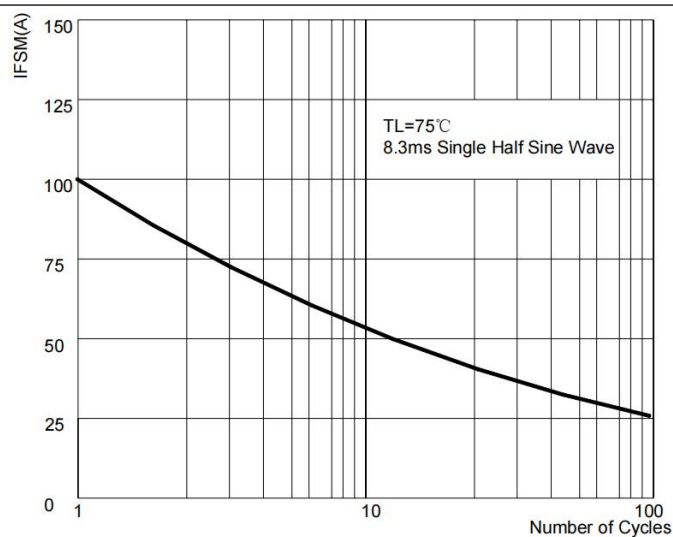


FIG3: Typical Forward Characteristics

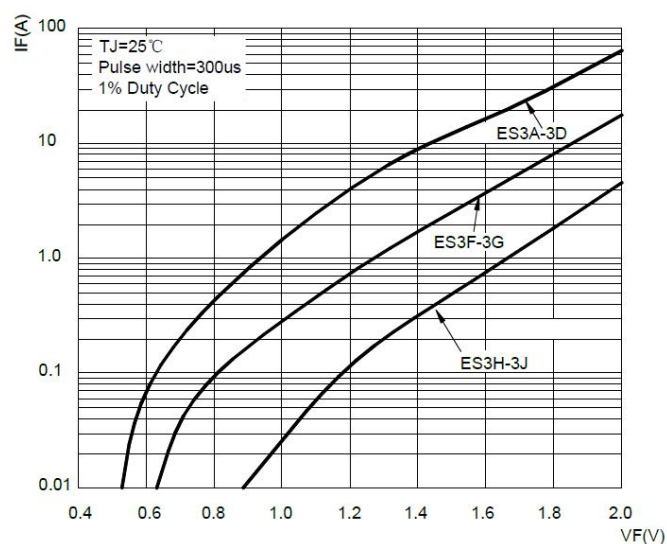


FIG4: Typical Reverse Characteristics


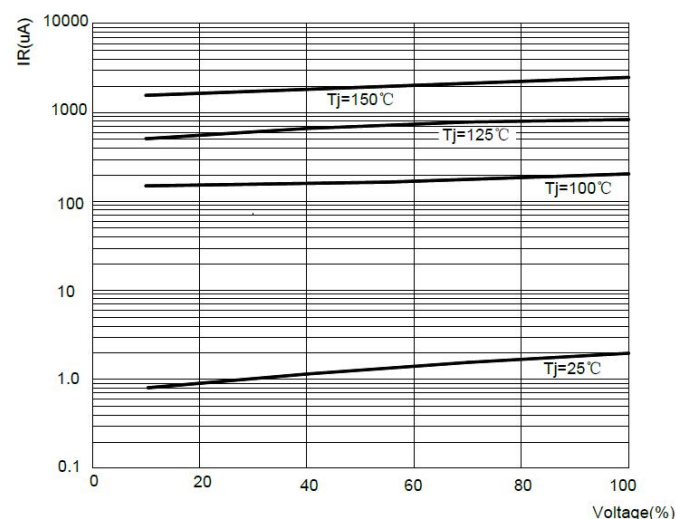


FIG5: Diagram of circuit and Testing wave form of reverse recovery time

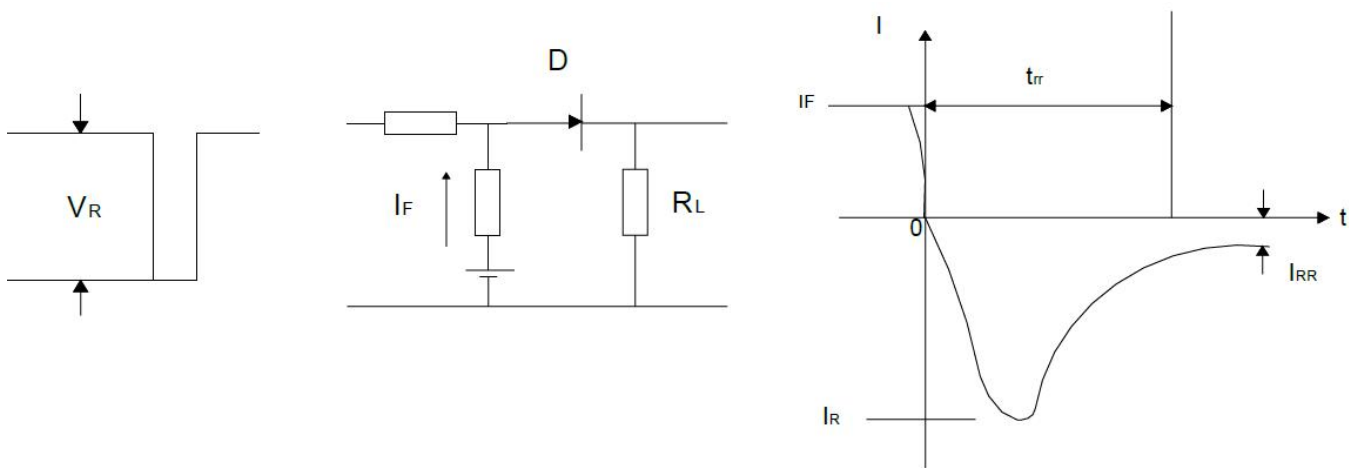

ES3A THRU ES3J

■ Ordering Information (Example)

PREFERED	PACKAGE CODE	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ES3A~ES3J	DO-214AB(SMC)	3000	6000	42000	13" reel
ES3A~ES3J	DO-214AB(SMC)	500	1500	15000	7" reel

■ Outline Dimensions

