
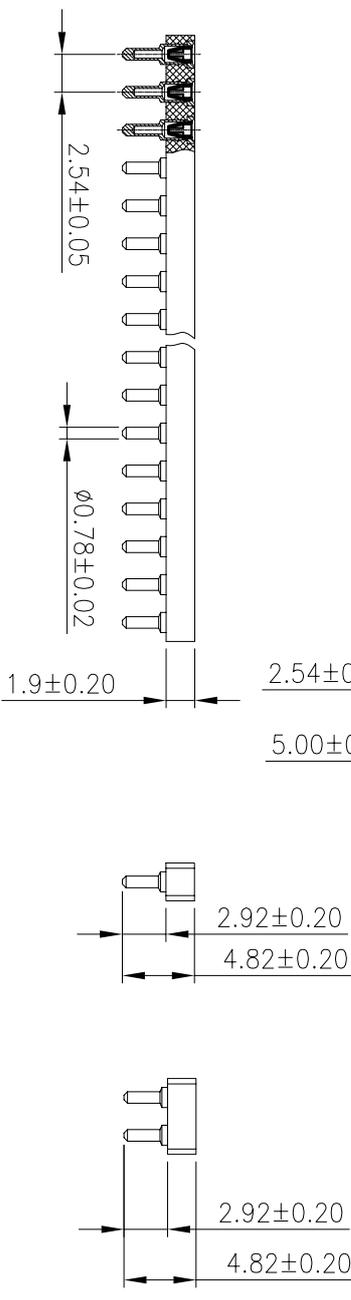
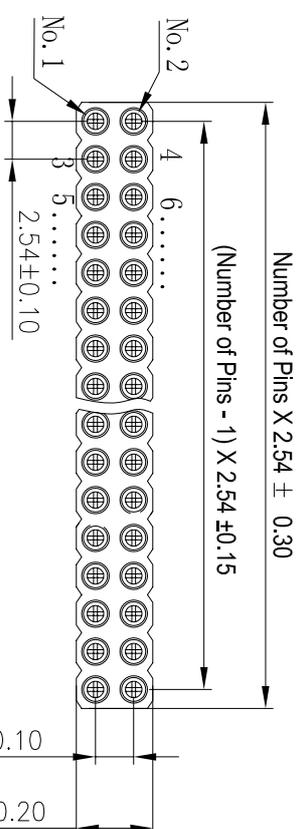


**Technical Specs:**

**Insulator:** Black glass filled polyester PPS-GF30-FR  
**Flammability:** UL 94V-0  
**Sleeve:** Brass  
**Contact clip(4/6 finger):** Beryllium copper(C17200)  
**Accepted pin:** Ø0.38 to 0.56mm  
**Forces:** (polished steel gauge Ø0.43mm)  
 --Insertion 2 N typ  
 --Withdrawal 1 N typ  
**Mechanical life:** min500 cycles  
**Rated current:** 3A  
**Contact resistance:** max 10mΩ  
**Dielectric resistance:** Min 1000MΩ  
**Operating temperature:** -40°C to +105°C  
**Soldering temperature:** 260°C, 10s max

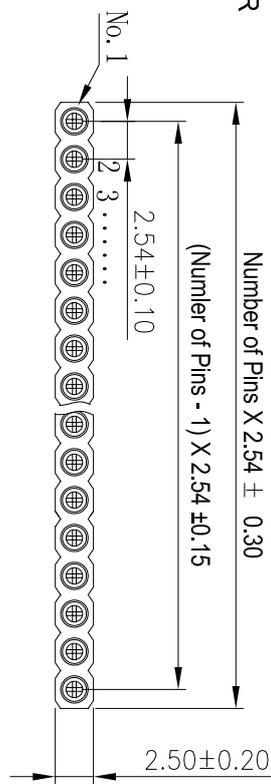

A									
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DRAW	YTYuSheng	12.08.08
A0	2012.08.08	NEW DRAWING		X.XX	±0.30	CHECK	DRAW		
				X.XX	±0.20	CHECK			
				X.XXX	±0.10				
				Angle	±3°				
				DIM	TOL				
A		PART NO.	FH-00305	SCALE	FIT	SIZE	SHEET	PROJ.	TITLE:
				UNIT	mm	A4	1/1	◆	2.54X1.9圓孔排母 1x2p
A		<h2 style="writing-mode: vertical-rl; text-orientation: upright;">深圳市连盛精密连接器有限公司</h2>							