QUICKSWITCH® PRODUCTS HIGH-SPEED CMOS 10-BIT LOW RESISTANCE BUS SWITCH

IDTQS3R384

FEATURES:

- **Enhanced N channel FET with no inherent diode to Vcc**
- **2.5Ω bidirectional switches connect inputs to outputs**
- **Zero propagation delay, zero ground bounce**
- **Undershoot clamp diodes on all switch and control inputs**
- **Two enables control five bits each**
- **Available in QSOP package**

APPLICATIONS:

- **Hot-swapping, hot-docking (low resistance for PCI and Compact PCI applications)**
- **Voltage translation (5V to 3.3V)**
- **Power Conservation**
- **Capacitance reduction and isloation**
- **Bus Isolation**
- **Clock Gating**


DESCRIPTION:

The QS3R384 provides a set of ten high-speed CMOS TTL-compatible bus switches. Two banks of 5 switches are controlled by independent Bus Enable ($\overline{BE}$) signals. The very low R_{ON} resistance (2.5Ω) of the QS3R384 allows inputs to be connected without adding propagation delay and without generating additional ground bounce noise.

The low ON resistance of the QS3R384 makes it ideal for PCI hot-plugging or hot-swapping applications.

The QS3R384 is characterized for operation at -40°C to +85°C.


FUNCTIONAL BLOCK DIAGRAM

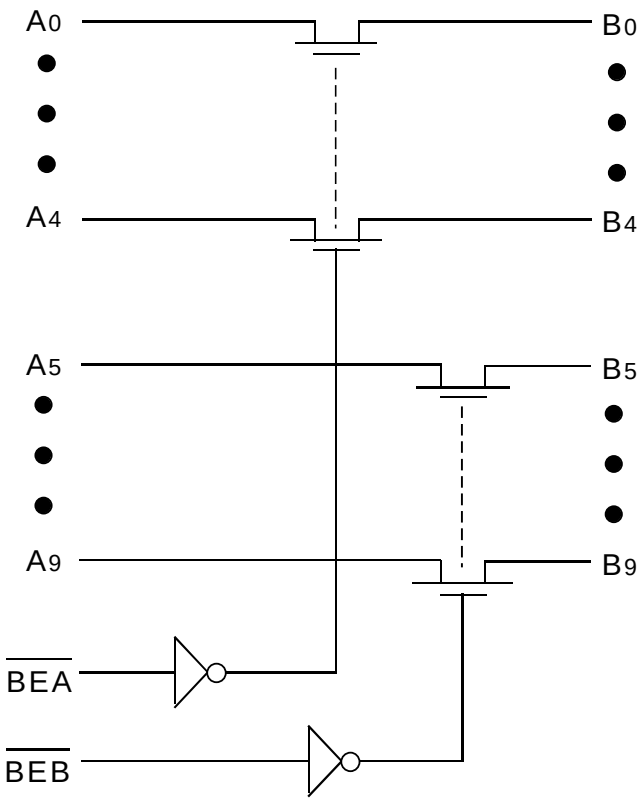

The IDT logo is a registered trademark of Integrated Device Technology, Inc.

© 2004 Integrated Device Technology, Inc.

PIN CONFIGURATION

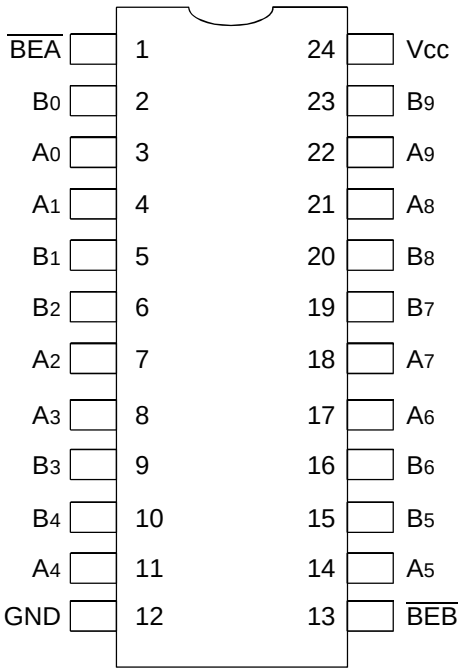

QSOP
TOP VIEW

ABSOLUTE MAXIMUM RATINGS(1)

Symbol	Description	Max	Unit
V_{TERM}(2)	Supply Voltage to Ground	–0.5 to +7	V
V_{TERM}(3)	DC Switch Voltage V_S	–0.5 to +7	V
V_{TERM}(3)	DC Input Voltage V_{IN}	–0.5 to +7	V
V_{AC}	AC Input Voltage (pulse width ≤20ns)	–3	V
I_{OUT}	DC Output Current	120	mA
P_{MAX}	Maximum Power Dissipation (T_A = 85°C)	0.5	W
T_{STG}	Storage Temperature	–65 to +150	°C

NOTES:
1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. V_{CC} terminals.
3. All terminals except V_{CC} .

CAPACITANCE (T_A = +25°C, f = 1MHz, V_{IN} = 0V, V_{OUT} = 0V)

Pins	Typ.	Max.(1)	Unit
Control Inputs	3	4	pF
Quickswitch Channels (Switch OFF)	5	6	pF

NOTE:
1. This parameter is guaranteed but not production tested.

PIN DESCRIPTION

Pin Names	I/O	Description
A_0 - A_9	I/O	Bus A
B_0 - B_9	I/O	Bus B
$\overline{BEA}$, $\overline{BEB}$	I	Bus Switch Enable

FUNCTION TABLE(1)

$\overline{BEA}$	$\overline{BEB}$	B_0 - A_4	B_5 - B_9	Function
H	H	Hi-Z	Hi-Z	Disconnect
L	H	A_0 - A_4	Hi-Z	Connect
H	L	Hi-Z	A_5 - A_9	Connect
L	L	A_0 - A_4	A_5 - A_9	Connect

NOTE:
1. H = HIGH Voltage Level
   L = LOW Voltage Level
   Z = High-Impedance


DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:
Industrial: T_A = –40°C to +85°C, V_{CC} = 5V ± 10%

Symbol	Parameter	Test Conditions	Min.	Typ.(1)	Max.	Unit
V_{IH}	Input HIGH Voltage	Guaranteed Logic HIGH for Control Pins	2	—	—	V
V_{IL}	Input LOW Voltage	Guaranteed Logic LOW for Control Pins	—	—	0.8	V
I_{IN}	Input Leakage Current (Control Inputs)	0V ≤ V_{IN} ≤ V_{CC}	—	0.01	±1	µA
I_{OZ}	Off-State Current (Hi-Z)	0V ≤ V_{OUT} ≤ V_{CC}, Switches OFF	—	0.01	±1	µA
R_{ON}	Switch ON Resistance(2)	V_{CC} = Min., V_{IN} = 0V, I_{ON} = 30mA	—	2.5	5	Ω
		V_{CC} = Min., V_{IN} = 2.4V, I_{ON} = 15mA	—	4	8.5	
V_P	Pass Voltage(3)	V_{IN} = V_{CC} = 5V, I_{OUT} = -5µA	3.7	4	4.3	V

NOTES:
1. Typical values are at V_{CC} = 5V and T_A = 25°C.
2. Max value of R_{ON} is guaranteed but not production tested.
3. Pass voltage is guaranteed but not production tested.

TYPICAL ON RESISTANCE vs V_{IN} AT V_{CC} = 5V

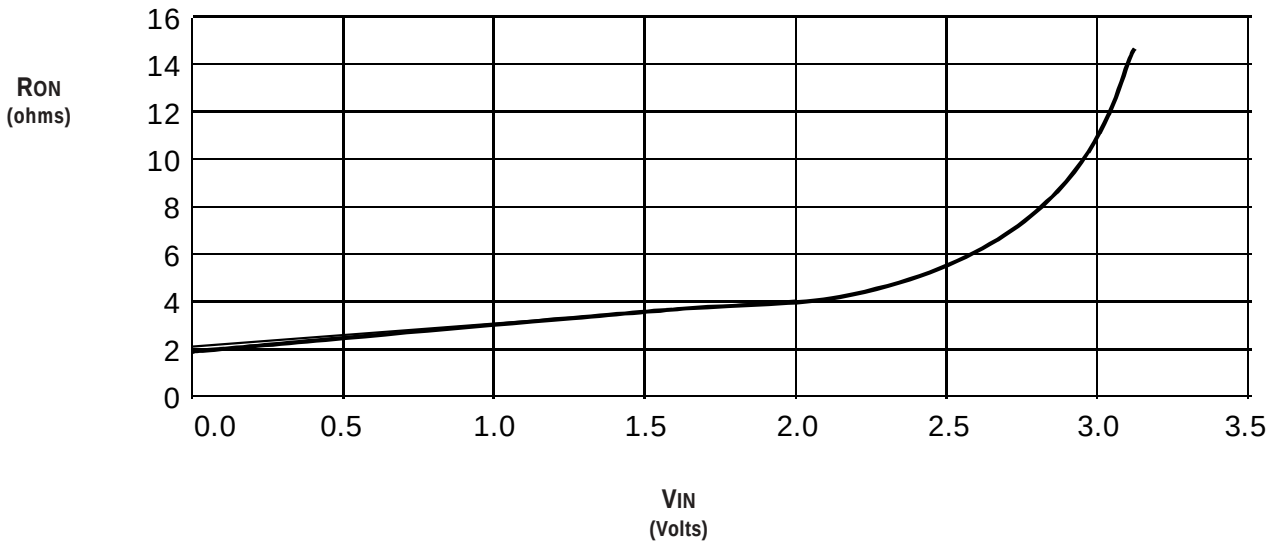

POWER SUPPLY CHARACTERISTICS

Symbol	Parameter	Test Conditions[1]	Max.	Unit
I_{CCQ}	Quiescent Power Supply Current	V_{CC} = Max., V_{IN} = GND or V_{CC}, f = 0	1.5	µA
ΔI_{CC}	Power Supply Current per Input HIGH[2]	V_{CC} = Max., V_{IN} = 3.4V, f = 0	2.5	mA
I_{CCD}	Dynamic Power Supply Current per MHz[3]	V_{CC} = Max., A and B Pins Open, Control Inputs Toggling @ 50% Duty Cycle	0.25	mA/MHz

NOTES:
1. For conditions shown as Min. or Max., use the appropriate values specified under DC Electrical Characteristics.
2. Per TTL-driven input (V_{IN} = 3.4V, control inputs only). A and B pins do not contribute to ΔI_{CC}.
3. This current applies to the control inputs only and represents the current required to switch internal capacitance at the specified frequency. The A and B inputs generate no significant AC or DC currents as they transition. This parameter is guaranteed but not production tested.

SWITCHING CHARACTERISTICS OVER OPERATING RANGE


T_A = -40°C to +85°C, V_{CC} = 5V ± 10%

C_{LOAD} = 50pF, R_{LOAD} = 500Ω unless otherwise noted.

Symbol	Parameter	Min.[1]	Typ.	Max.	Unit
t_{PLH} t_{PHL}	Data Propagation Delay[2] Ax to Bx, Bx to Ax	—	—	0.12[3]	ns
t_{PZL} t_{PZH}	Switch Turn-On Delay $\overline{BEA}$, $\overline{BEB}$ to Ax, Bx	1.5	—	6	ns
t_{PLZ} t_{PHZ}	Switch Turn-Off Delay[2] $\overline{BEA}$, $\overline{BEB}$ to Ax, Bx	1.5	—	4	ns

NOTES:
1. Minimums are guaranteed but not production tested.
2. This parameter is guaranteed but not production tested.
3. The bus switch contributes no propagation delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.12ns at C_L = 50pF. Since this time constant is much smaller than the rise and fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch, when used in a system, is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

ORDERING INFORMATION

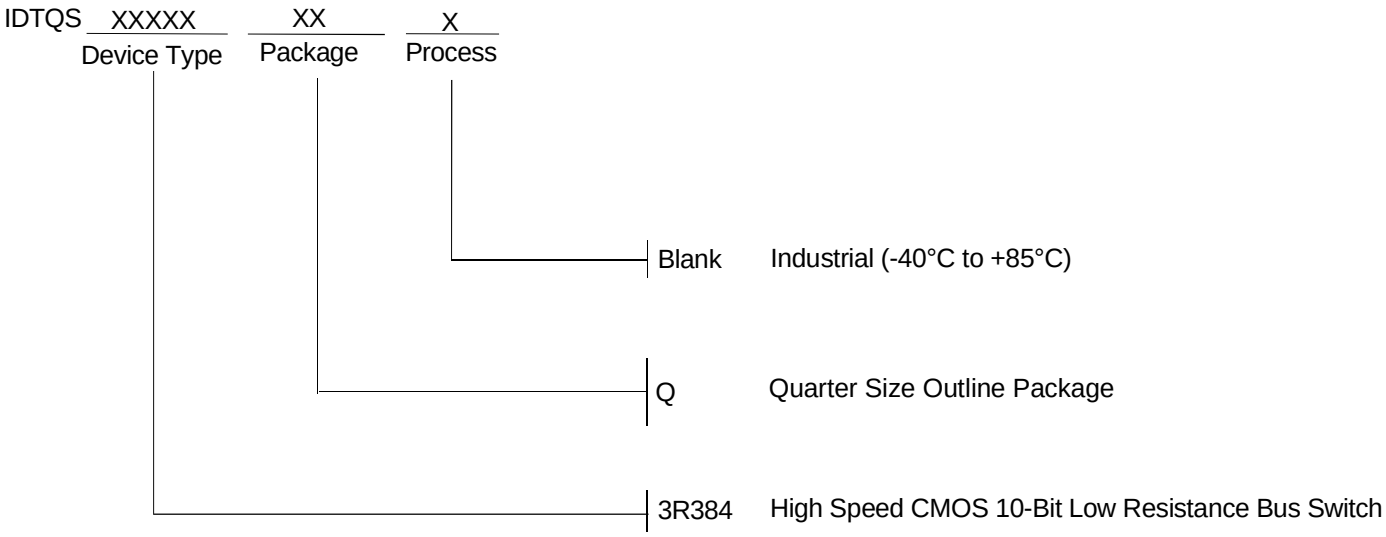

CORPORATE HEADQUARTERS
2975 Stender Way
Santa Clara, CA 95054

for SALES:
800-345-7015 or 408-727-6116
fax: 408-492-8674
www.idt.com

for Tech Support:
logichelp@idt.com
(408) 654-6459