
This document was generated on 05/27/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0760470001
Status: Active
Overview: sfp_stacked_multiport_connectors
Description: Small Form-factor Pluggable Plus (SFP+) Stacked 2-by-5 Multi-Port Connector with 4 Lightpipe Ports, EMI Metal Gasket, 200 Circuits, Tin (Sn)/Lead(Pb) Tails

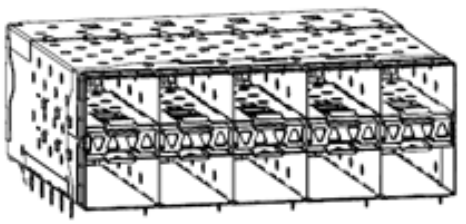

Series image - Reference only

Documents:

- 3D Model
- Drawing (PDF)
- Application Specification (PDF)
- Product Specification PS-75310-001 (PDF)
- RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	I/O Connectors
Series	76047
Application	Module-to-Board
Component Type	Receptacle
Overview	sfp_stacked_multiport_connectors
Product Name	SFP Plus
Type	N/A

Physical

Boot Color	N/A
Circuits (Loaded)	200
Circuits (maximum)	200
Circuits Detail	200
Color - Resin	Black, Clear (Blue Tint)
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Female
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin-Lead
Material - Resin	High Temperature Thermoplastic, Polycarbonate
Number of Rows	2
Orientation	Right Angle
PC Tail Length (in)	0.081 In
PC Tail Length (mm)	2.07 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.57 mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface (in)	0.031 In
Pitch - Mating Interface (mm)	0.80 mm
Pitch - Term. Interface (in)	0.031 In
Pitch - Term. Interface (mm)	0.80 mm
Plating min: Mating (µin)	30.4
Plating min: Mating (µm)	0.76
Plating min: Termination (µin)	30.4

EU RoHS
RoHS Compliant by Exemption
REACH SVHC
Not Reviewed
Halogen-Free Status
Halogen-Free

China RoHS
50
Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
76047Series

Use With
0759510999 SFP Dust Plug,

Application Tooling | **FAQ**

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
SFP Stacked Multi-Port Insertion Tool, 2 by 5	0622029980
SFP Stacked Multi-Port Extraction Tool, 2 by 5	0622029990

Plating min: Termination (µm)	0.76
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	10
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Waterproof / Dustproof	No

Electrical


Current - Maximum per Contact	0.5A
Grounding to Panel	None
Shield Type	EMI Gasket
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC


Material Info

Reference - Drawing Numbers

Application Specification	AS-75310-001, AS-76090-001
Packaging Specification	PK-75733-001
Product Specification	PS-75310-001
Sales Drawing	SD-76047-001
Test Summary	TS-75310-001

PART NUMBER	DESCRIPTION	VIEW	COMPLIANT TAIL PLATING
760470001	4 LIGHT PORTS	SEE PG 2	TIN / LEAD
760470002	INNER 2 PORTS	SEE PG 2	TIN / LEAD
760470003	OUTER 2 PORTS	SEE PG 2	TIN / LEAD
760475001	4 LIGHT PORTS	SEE PG 2	TIN
760475002	INNER 2 PORTS	SEE PG 2	TIN
760475003	OUTER 2 PORTS	SEE PG 2	TIN

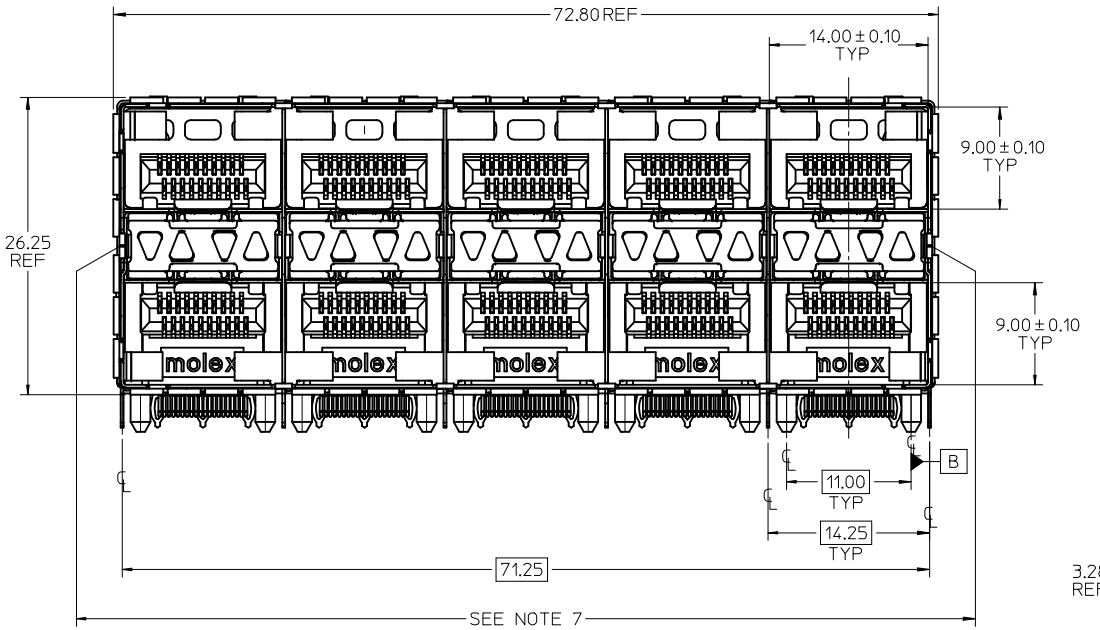

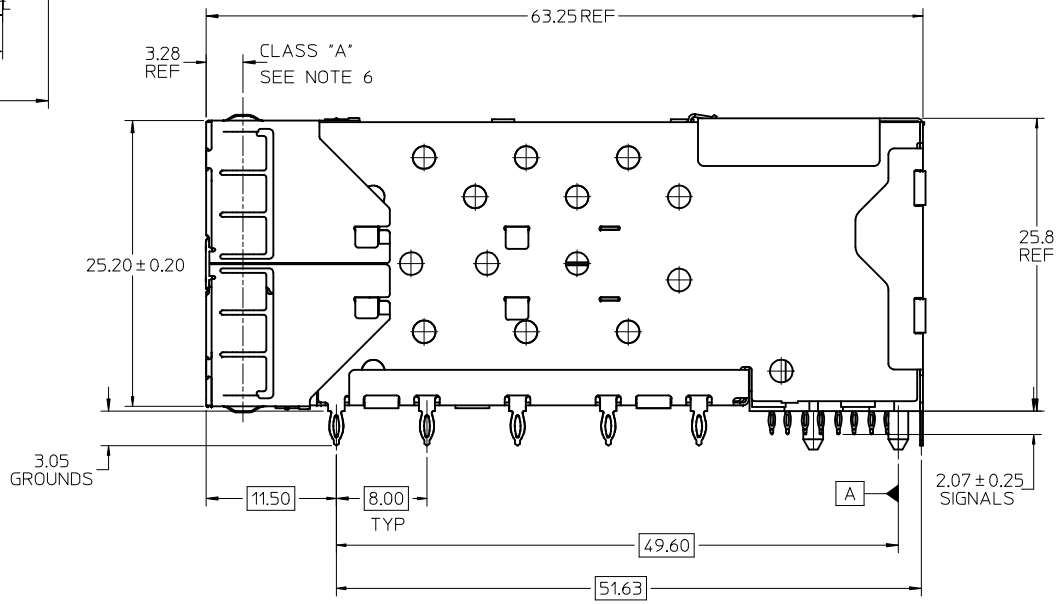

NOTES:
1. MATERIAL:
   CAGE: NICKEL SILVER, THICKNESS: 0.25mm
   EMI GASKET: PHOS-BRONZE
   CONNECTOR HOUSING: GLASS FILLED THERMOPLASTIC, UL: 94 V-0,
   COLOR: BLACK
   OVERMOLD TERMINAL HOUSING: GLASS FILLED THERMOPLASTIC.
   UL 94 V-0, COLOR: BLACK
   TERMINALS: BRASS
   LIGHT PIPES: POLYCARBONATE, UL 94 V-0, COLOR: CLEAR
   LIGHT PIPE HOUSING: ZINC
2. FINISH
   TERMINALS: CONTACT AREA: 0.76 MICRONS MIN. HARD GOLD
   OVER 1.27 MICRONS MIN. NICKEL.
   COMPLIANT TAIL - TIN/LEAD OPTION: 0.76 - 1.52 MICRONS 90/10 TIN/LEAD
   OVER 0.76 - 1.52 MICRONS NICKEL
   COMPLIANT TAIL - TIN OPTION: 0.76 - 1.52 MICRONS TIN
   OVER 0.76 - 1.52 MICRONS NICKEL
   LIGHT PIPE HOUSING: 150 MICRONS NICKEL OVER 150 MICRONS COPPER
   EMI GASKET: 2.54 MICRONS NICKEL OVERALL
3. REFER TO PS-75310-001 PRODUCT SPEC FOR ALL ELECTRICAL, MECHANICAL AND ENVIRONMENTAL SPECIFICATIONS.
4. LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW-PROFILE LED PACKAGE, FOR OTHER RECOMMENDED LAYOUTS REFER TO MOLEX'S REPORT TS-75310-001
5. REFER TO PK-75733-001 FOR ALL PACKAGING SPECIFICATIONS.
6. ALL EXTERIOR SURFACES TO BE CLASS "B" SURFACES EXCEPT THE UNDER SIDE OF THE CAGE WHERE THE PCB WOULD BE LOCATED AND AS NOTED. THE SURFACES TO CONFORM TO THE MOLEX COSMETIC DOC PS-45499-002.
7. THE OVERALL CAGE WIDTH AT THE VERTICAL CENTER OF THE FRONT EDGE WILL FALL WITHIN THIS DIMENSION: 72.05+/-0.30 MM. THIS PORTION OF THE CAGE WILL FLEX INWARD AS THE CAGE IS BEING INSERTED INTO THE BEZEL OPENING.

REV	DESCRIPTION	DRWN	CH'KD	APPR	DATE
A	ADD NOTE 7/KEEPOUT'S EC NO: UCP2009-1582	MSIBARRA	BBARKER	SMILLER	2009/01/07 2009/01/09 2009/01/12

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.13	± ---
1 PLACE	± 0.25	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 3:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION


DRAWN BY	MSANDBERG 10/16/2006
CHECKED BY	JLONG 10/16/2006
APPROVED BY	RNELSON 10/16/2006
MATERIAL NO.	SEE TABLE

TITLE: STACKED SFP+ 2X5 ASS'Y WITH METAL EMI GASKET AND LIGHTPIPES


MOLEX INCORPORATED

DOCUMENT NO. SD-76047-001
SHEET NO. 1 OF 4
SIZE C


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

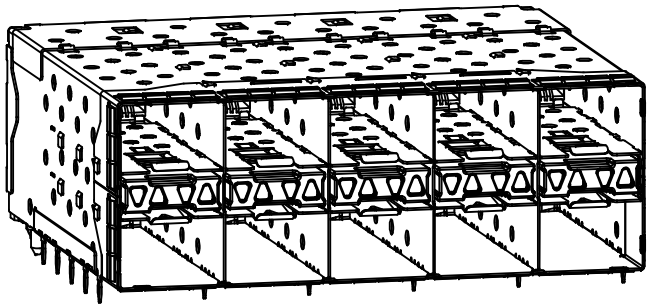


760470001 AND 760475001
WITH INNER AND OUTER LIGHT PIPES

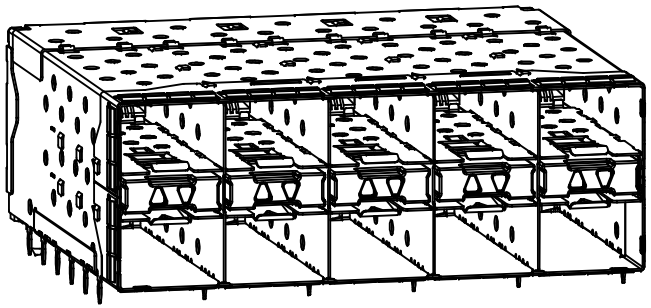


760470002 AND 760475002
WITH INNER LIGHT PIPES

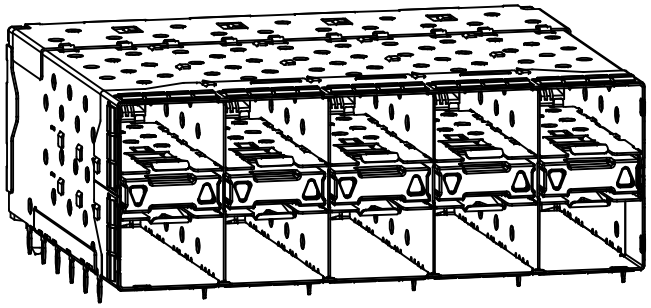

760470003 AND 760475003
WITH OUTER LIGHT PIPES

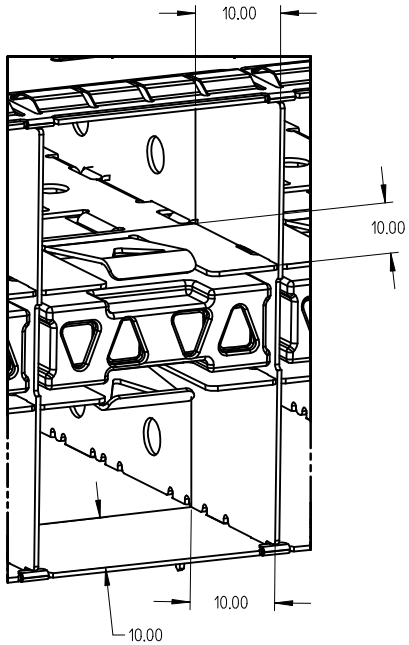

10.00mm AREA SETBACK IN CAGE IS TO BE FREE OF ANY
HOLES, DIMPLES, SEAMS OR ANY OTHER FEATURE.
(4 SIDES PER MODULE PORT)

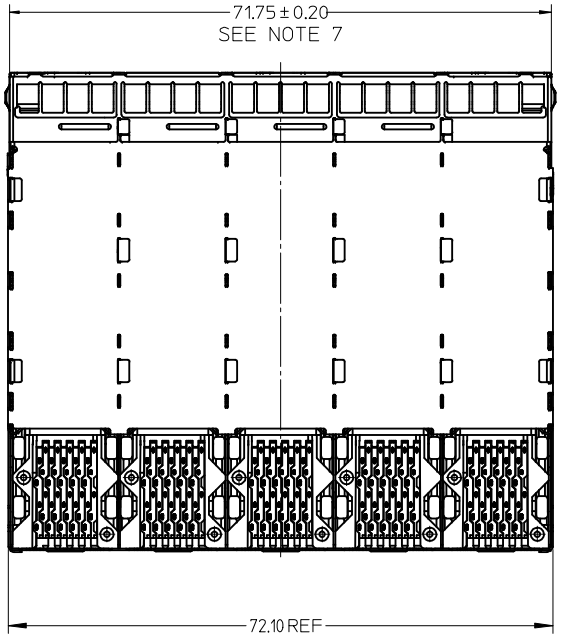

SEE SHEET 1
EC NO: UCP2009-1582 2009/01/07
DRWN:MSJBARRA 2009/01/09
CH'KD:BBARKER 2009/01/12
APPR:SMILLER
DESCRIPTION
REV

QUALITY SYMBOLS
▼=0
Ⓒ▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.13	± ---
1 PLACE	± 0.25	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 2:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	MSANDBERG	10/16/2006
CHECKED BY	JLONG	10/16/2006
APPROVED BY	RNELSON	10/16/2006


TITLE: STACKED SFP+ 2X5 ASS'Y WITH METAL EMI GASKET AND LIGHTPIPES

MOLEX INCORPORATED


MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-76047-001
SHEET NO.: 2 OF 4


SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



CONNECTOR PIN-OUT DETAIL
COMPONENT SIDE OF BOARD

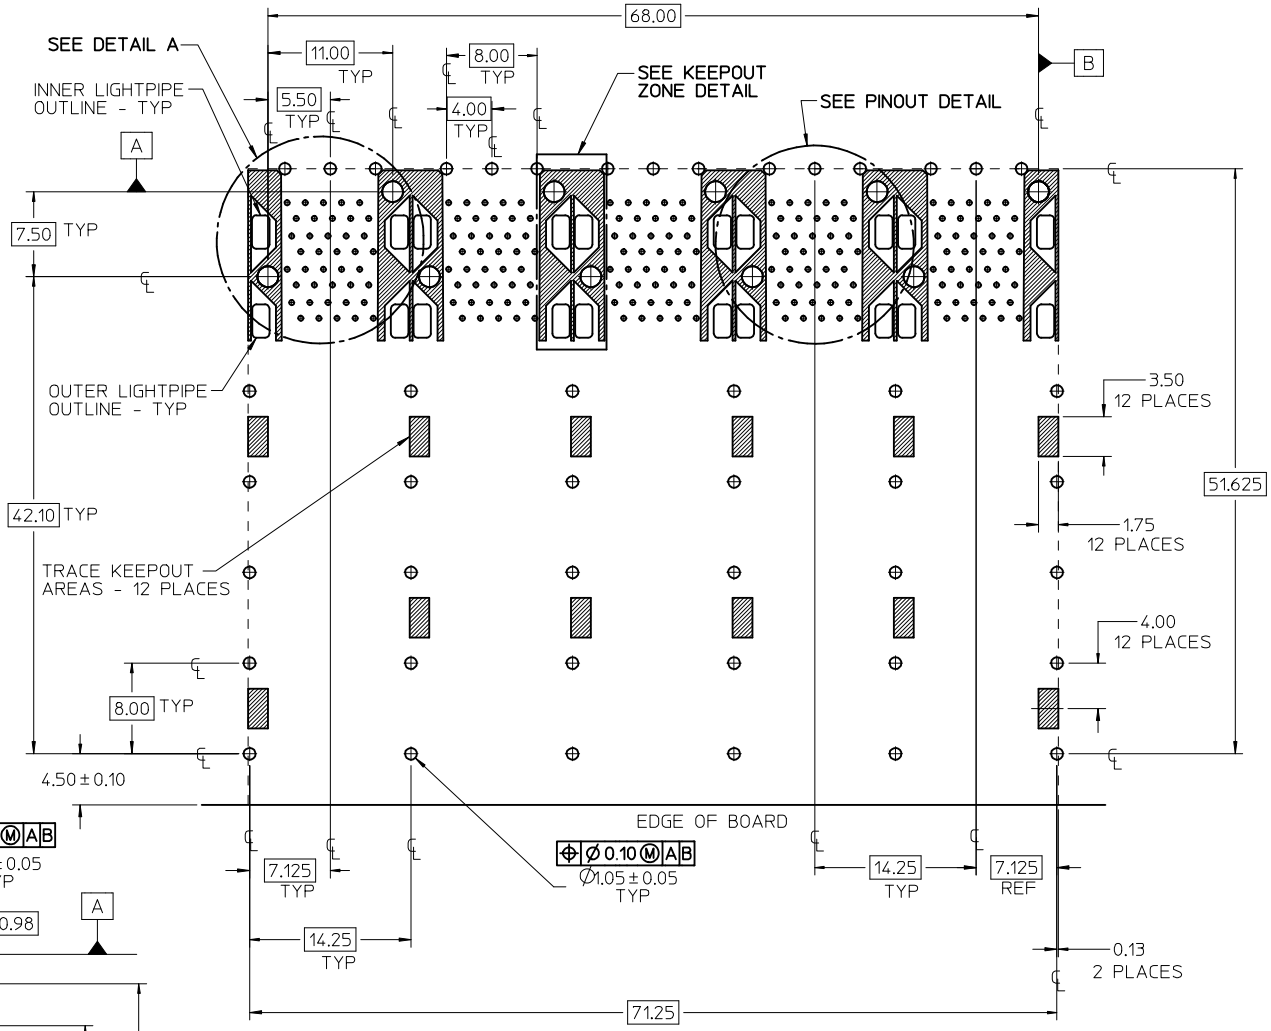

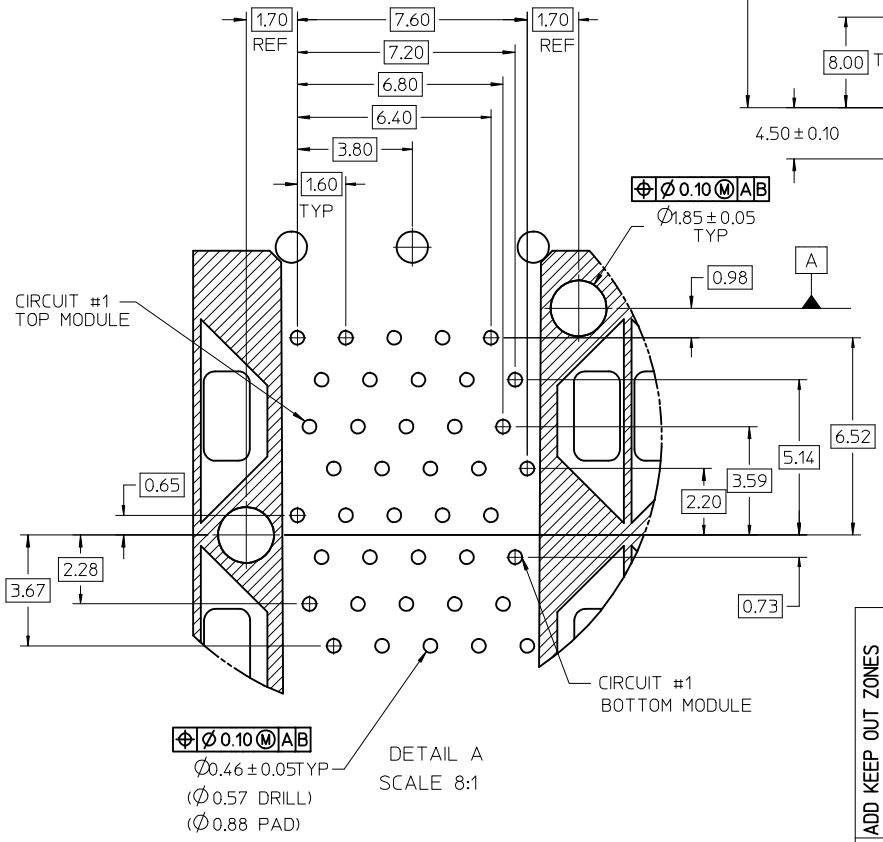

RECOMMENDED PCB LAYOUT - COMPONENT SIDE
RECOMMENDED PCB THICKNESS - 2.36 MM (0.93 INCH)

THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT
TO BE CONSIDERED THE KEEP OUT AREA FOR COMPONENT'S
(OTHER THAN LIGHT PIPE LED'S)
THIS AREA IS INDICATED BY THE DASHED LINE

ADD KEEP OUT ZONES
EC NO: UCP2009-1582 2009/01/07
DRWN:MSIBARRA 2009/01/09
CH'KD:BBARKER 2009/01/12
APPR:SMILLER 2009/01/12
DESCRIPTION
REV

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.13	± ---
1 PLACE	± 0.25	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 3:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION


	DRAWN BY	DATE
	MSANDBERG	10/16/2006
	CHECKED BY	DATE
	JLONG	10/16/2006
	APPROVED BY	DATE
	RNELSON	10/16/2006

TITLE: STACKED SFP+ 2X5 ASS'Y WITH METAL EMI GASKET AND LIGHTPIPES


MOLEX INCORPORATED


MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-76047-001
SHEET NO.: 3 OF 4
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

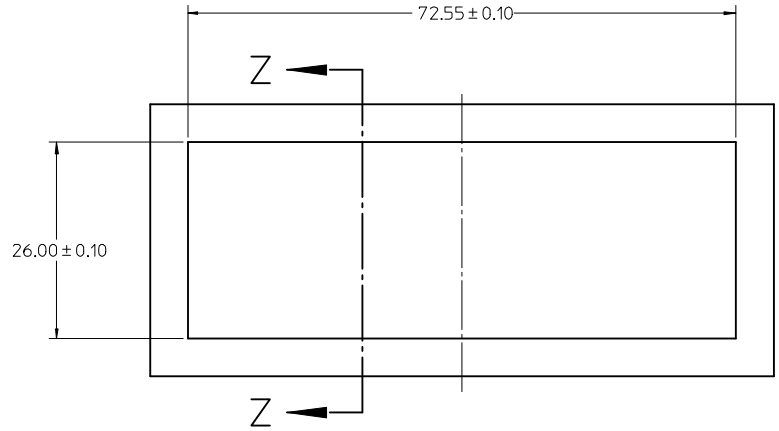

BEZEL CUTOUT CENTER SPACING DETAIL
BEZEL THICKNESS 0.8-2.6

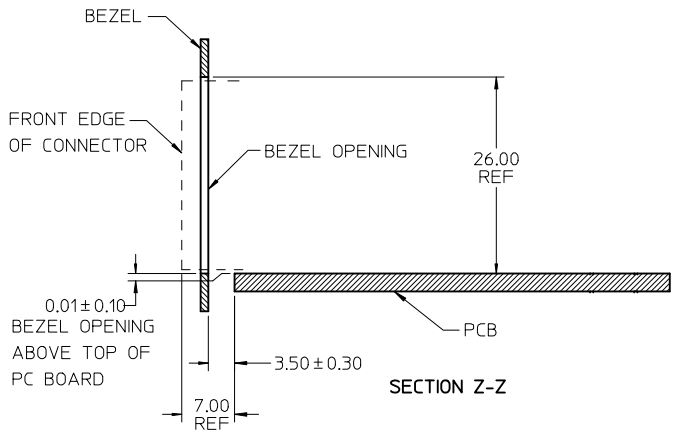

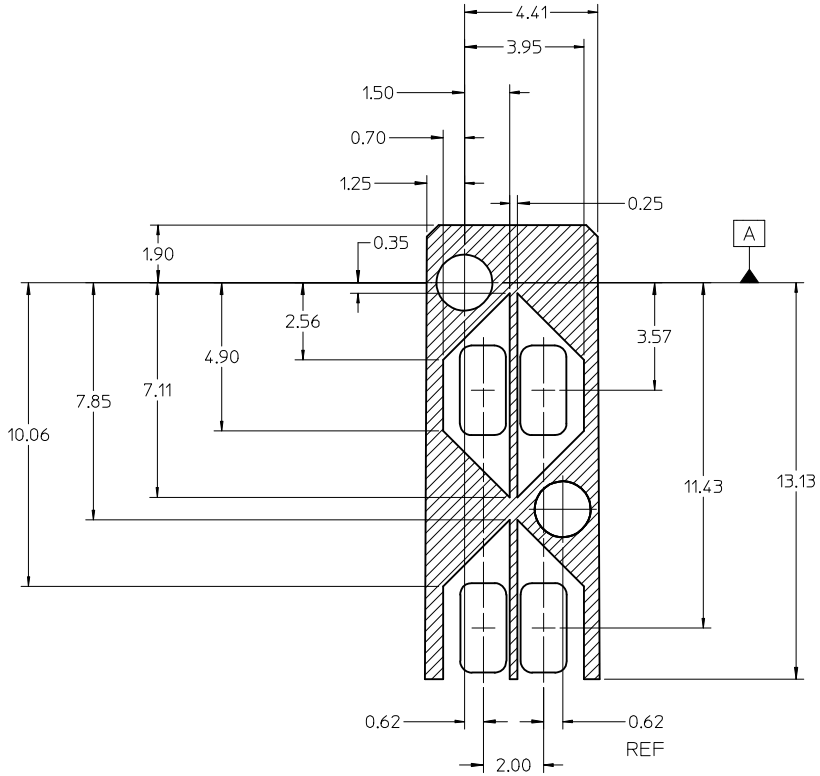

DETAIL - LIGHTPIPE LOCATION AND OTHER ZONES
SCALE 8:1

THE HATCHED AREA IN THIS VIEW INDICATES ZONES THAT ARE OCCUPIED BY THE PLASTIC HOUSING THAT SEATS AGAINST THE PCB AND BY THE VERTICAL METAL CAGE WALL THAT STOPS JUST SHORT OF THE PCB

SEE SHEET 1	EC NO: UCP2009-1582	2009/01/07	
TI	DRWN:MSIBARRA	2009/01/09	
	CH'KD:BBARKER	2009/01/12	
	APPR:SMILLER		
REV	DESCRIPTION		

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.13	± ---
1 PLACE	± 0.25	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	IN/MM
SCALE	2:1
DESIGN UNITS	INCH
	THIRD ANGLE PROJECTION
DRAWN BY	MSANDBERG
DATE	10/16/2006
CHECKED BY	JLONG
DATE	10/16/2006
APPROVED BY	RNELSON
DATE	10/16/2006
MATERIAL NO.	SEE TABLE
TITLE	STACKED SFP+ 2X5 ASS'Y WITH METAL EMI GASKET AND LIGHTPIPES
	MOLEX INCORPORATED
DOCUMENT NO.	SD-76047-001
SHEET NO.	4 OF 4
SIZE	C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION