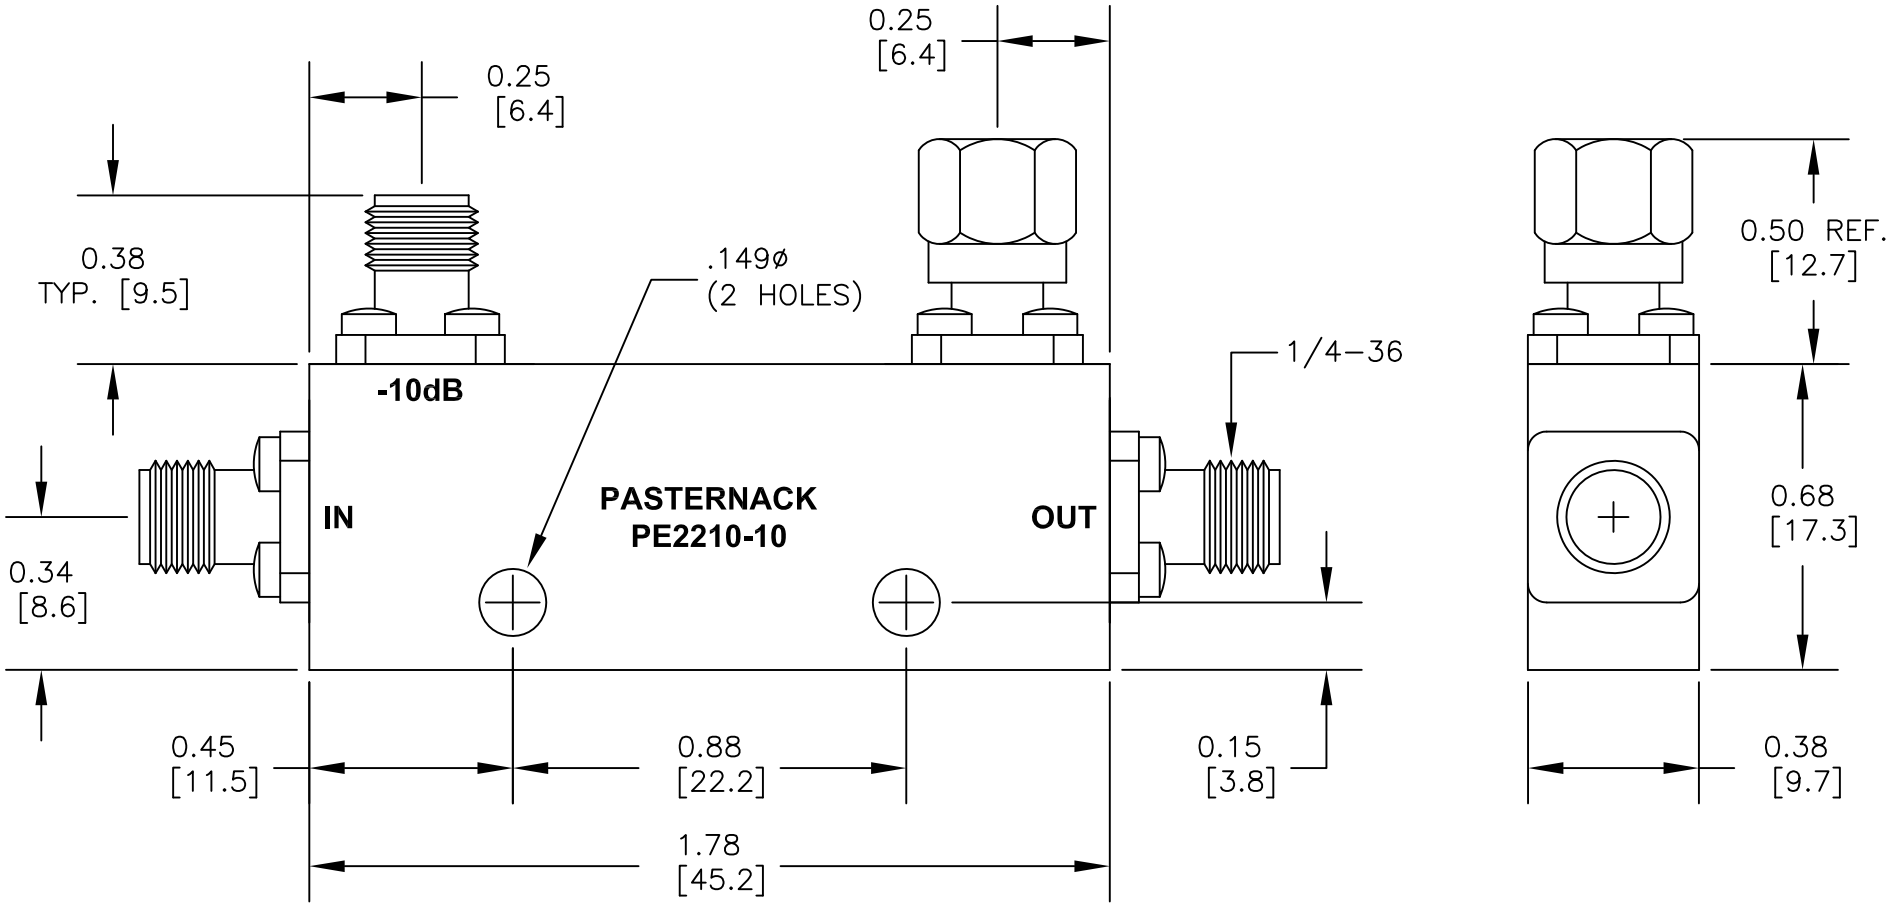


SPECIFICATIONS

FREQUENCY RANGE: 2.0 - 8.0 GHz
COUPLING (INCLUDES FREQUENCY SENSITIVITY): 10 ± 1.00 dB
FREQUENCY SENSITIVITY: ± 0.50 dB
INSERTION LOSS: (EXCLUDING COUPLED POWER) 0.35 dB (TRUE) 1.00 dB
DIRECTIVITY: 20 dB MINIMUM
PRIMARY LINE: 1.25 VSWR MAX.
SECONDARY LINE: 1.25 VSWR MAX.
AVG. INCIDENT: 50 WATTS POWER
AVG. REFLECTED: 5 WATTS POWER
PEAK: 3 KW POWER

PASTERNACK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE	DES.				
PE2210-10	SMA FEMALE DIRECTIONAL COUPLER BROADBAND FREQUENCY RANGE: 2.0-8.0 GHz				
REV. B	FSCM NO. 53919	CAD FILE 101012	SCALE N/A	SIZE A	2233

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].