

Pb Free Plating Product


SFF1001GS thru SFF1008GS



10.0 Ampere Insulated Series Connection Super Fast Recovery Rectifiers

- Features**
- ★ Super fast switching for high efficiency
 - ★ Low forward voltage drop
 - ★ High current capability
 - ★ Low reverse leakage current
 - ★ High surge current capability
- Application**
- ★ Automotive Inverters and Solar Inverters
 - ★ Plating Power Supply, SMPS and UPS
 - ★ Car Audio Amplifiers and Sound Device Systems

- Mechanical Data**
- ★ Case: ITO-220AB full plastic isolated package
 - ★ Epoxy: UL 94V-0 rate flame retardant
 - ★ Terminals: Solderable per MIL-STD-202 method 208
 - ★ Polarity: As marked on diode body
 - ★ Mounting position: Any
 - ★ Weight: 1.95 gram approximately

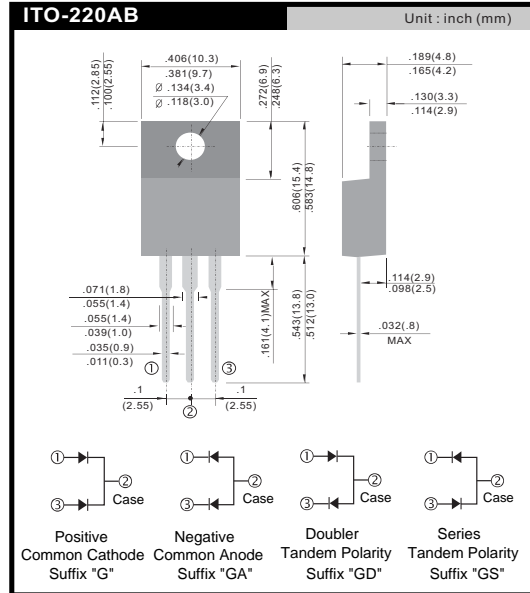

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	SFF	SFF	SFF	SFF	SFF	SFF	SFF	SFF	UNIT
		1001 GS	1002 GS	1003 GS	1004 GS	1005 GS	1006 GS	1007 GS	1008 GS	
Maximum repetitive peak reverse voltage	V _R RRM	50	100	150	200	300	400	500	600	V
Maximum RMS voltage	V _R RMS	35	70	105	140	210	280	350	420	V
Maximum DC blocking voltage	V _R DC	50	100	150	200	300	400	500	600	V
Maximum average forward rectified current	I _F (AV)	10								A
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I _F FSM	125								A
Maximum instantaneous forward voltage (Note 1) I _F = 5A	V _F	0.975			1.3		1.7			V
Maximum reverse current @ rated V _R	I _R	10								μA
		400								
Maximum reverse recovery time (Note 2)	t _{rr}	35								ns
Typical junction capacitance (Note 3)	C _J	70				50				pF
Typical thermal resistance	R _θ JC	8								°C/W
Operating junction temperature range	T _J	- 55 to +150								°C
Storage temperature range	T _{STG}	- 55 to +150								°C

Note 1: Pulse Test with PW=300μs, 1% Duty Cycle
 Note 2: Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A.
 Note 3: Measured at 1 MHz and Applied Reverse Voltage of 4.0V DC.

RATINGS AND CHARACTERISTICS CURVES

($T_A=25^{\circ}\text{C}$ unless otherwise noted)

FIG. 1 FORWARD CURRENT DERATING CURVE

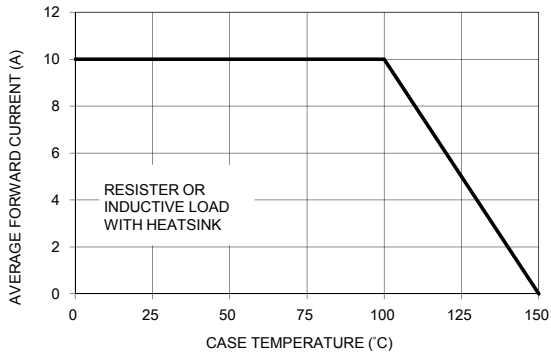


FIG. 2 TYPICAL REVERSE CHARACTERISTICS

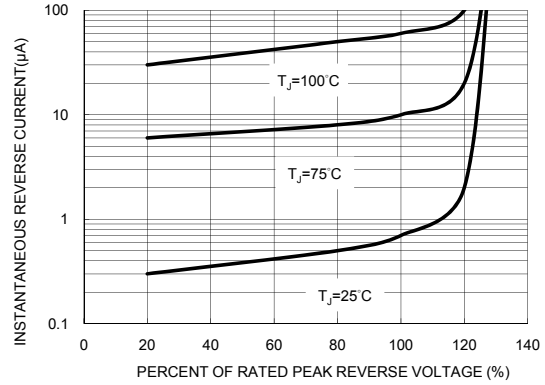


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

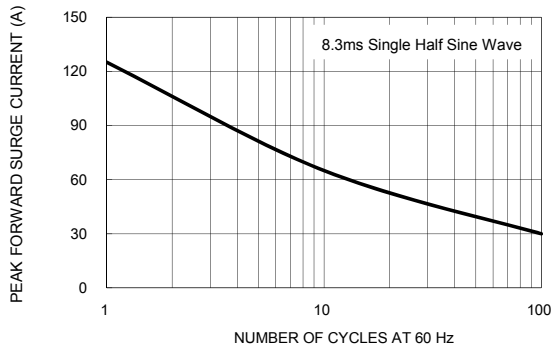


FIG. 4 TYPICAL FORWARD CHARACTERISTICS

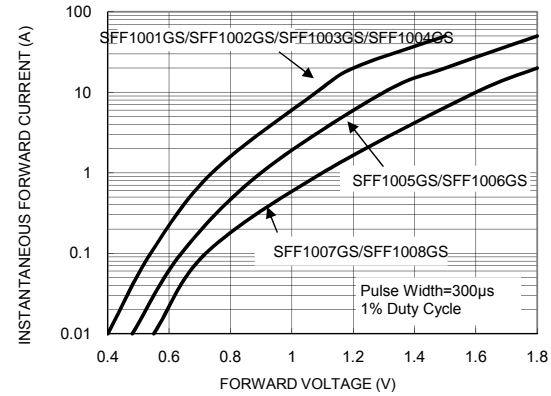


FIG. 5 TYPICAL JUNCTION CAPACITANCE

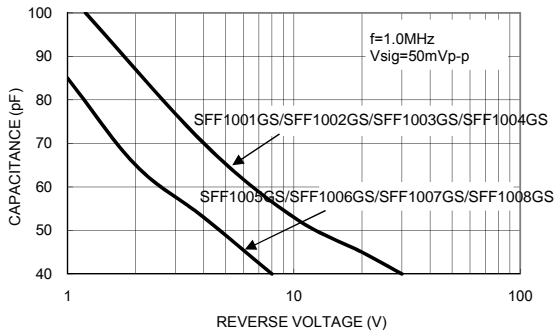


FIG. 6 REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

