
APT10030L2VR


1000V 33A 0.300Ω

POWER MOS V®



Power MOS V® is a new generation of high voltage N-Channel enhancement mode power MOSFETs. This new technology minimizes the JFET effect, increases packing density and reduces the on-resistance. Power MOS V® also achieves faster switching speeds through optimized gate layout.

- **TO-264 MAX Package**
- **100% Avalanche Tested**
- **Faster Switching**
- **Lower Leakage**



MAXIMUM RATINGS All Ratings: T_C = 25°C unless otherwise specified.

Symbol	Parameter	APT10030L2VR	UNIT
V_{DSS}	Drain-Source Voltage	1000	Volts
I_D	Continuous Drain Current @ T_C = 25°C	33	Amps
I_{DM}	Pulsed Drain Current ①	132	
V_{GS}	Gate-Source Voltage Continuous	±30	Volts
V_{GSM}	Gate-Source Voltage Transient	±40	
P_D	Total Power Dissipation @ T_C = 25°C	830	Watts
	Linear Derating Factor	6.64	W/°C
T_J,T_{STG}	Operating and Storage Junction Temperature Range	-55 to 150	°C
T_L	Lead Temperature: 0.063" from Case for 10 Sec.	300	
I_{AR}	Avalanche Current ① (Repetitive and Non-Repetitive)	33	Amps
E_{AR}	Repetitive Avalanche Energy ①	50	mJ
E_{AS}	Single Pulse Avalanche Energy ④	3200	

ADVANCE TECHNICAL INFORMATION

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage (V_{GS} = 0V, I_D = 250µA)	1000			Volts
$I_{D(on)}$	On State Drain Current ② (V_{DS} > $I_{D(on)}$ x $R_{DS(on)}$ Max, V_{GS} = 10V)	33			Amps
$R_{DS(on)}$	Drain-Source On-State Resistance ② (V_{GS} = 10V, 0.5 $I_{D[Cont.]}$)			0.300	Ohms
I_{DSS}	Zero Gate Voltage Drain Current (V_{DS} = V_{DSS}, V_{GS} = 0V)			25	µA
	Zero Gate Voltage Drain Current (V_{DS} = 0.8 V_{DSS}, V_{GS} = 0V, T_C = 125°C)			250	
I_{GSS}	Gate-Source Leakage Current (V_{GS} = ±30V, V_{DS} = 0V)			±100	nA
$V_{GS(th)}$	Gate Threshold Voltage (V_{DS} = V_{GS}, I_D = 5mA)	2		4	Volts

CAUTION: These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

APT Website - http://www.advancedpower.com

USA 405 S.W. Columbia Street Bend, Oregon 97702-1035 Phone: (541) 382-8028 FAX: (541) 388-0364

EUROPE Chemin de Magret F-33700 Merignac - France Phone: (33) 5 57 92 15 15 FAX: (33) 5 56 47 97 61

050-5990 rev- 3-2001

DYNAMIC CHARACTERISTICS

APT10030L2VR

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
C_{iss}	Input Capacitance	V_{GS} = 0V V_{DS} = 25V f = 1 MHz		11170		pF
C_{oss}	Output Capacitance			1010		
C_{rss}	Reverse Transfer Capacitance			520		
Q_g	Total Gate Charge ③	V_{GS} = 10V V_{DD} = 0.5 V_{DSS} I_D = 0.5 $I_{D[Cont.]}$ @ 25°C		510		nC
Q_{gs}	Gate-Source Charge			41		
Q_{gd}	Gate-Drain ("Miller") Charge			210		
$t_{d(on)}$	Turn-on Delay Time	V_{GS} = 15V V_{DD} = 0.5 V_{DSS} I_D = $I_{D[Cont.]}$ @ 25°C R_G = 0.6Ω		19		ns
t_r	Rise Time			17		
$t_{d(off)}$	Turn-off Delay Time			80		
t_f	Fall Time			12		

ADVANCE TECHNICAL INFORMATION

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
I_S	Continuous Source Current (Body Diode)			33	Amps
I_{SM}	Pulsed Source Current ① (Body Diode)			132	
V_{SD}	Diode Forward Voltage ② (V_{GS} = 0V, I_S = -$I_{D[Cont.]}$)			1.3	Volts
t_{rr}	Reverse Recovery Time (I_S = -$I_{D[Cont.]}$, dI_S/dt = 100A/µs)		1150		ns
Q_{rr}	Reverse Recovery Charge (I_S = -$I_{D[Cont.]}$, dI_S/dt = 100A/µs)		31		µC

THERMAL CHARACTERISTICS

Symbol	Characteristic	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to Case			0.15	°C/W
$R_{\theta JA}$	Junction to Ambient			40	

① Repetitive Rating: Pulse width limited by maximum junction temperature.


② Pulse Test: Pulse width < 380 µS, Duty Cycle < 2%

③ See MIL-STD-750 Method 3471

④ Starting T_j = +25°C, L = 5.88mH, R_G = 25Ω, Peak I_L = 33A

APT Reserves the right to change, without notice, the specifications and information contained herein.

TO-264 MAX™(L2) Package Outline

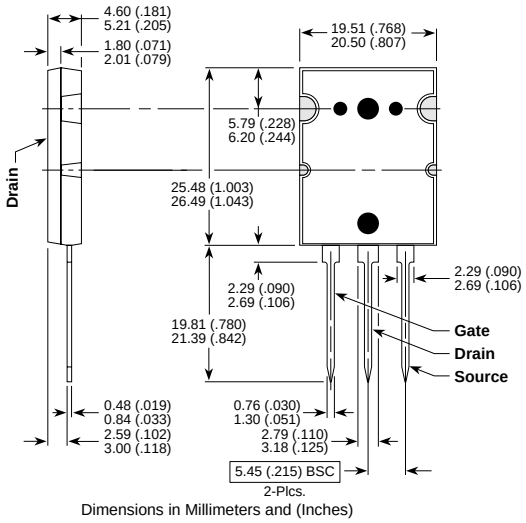

Dimensions in Millimeters and (Inches)

APT's devices are covered by one or more of the following U.S.patents: 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058

050-5990 rev- 3-2001