EVERLIGHT AMERICAS

DATASHEET

SMD ▪ TOP View LEDs
EAPL3527GA3

PRELIMINARY



Features

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free
- The product itself will remain within RoHS compliant version.

Description

This series is available in soft orange, green,blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 28.04.2014. Issue No: 1

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
InGaN	Brilliant Green	Water Clear

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_F	30	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	100	mA
Power Dissipation	Pd	95	mW
Junction Temperature	T_j	115	℃
Operating Temperature	T_{opr}	-40 ~ +85	℃
Storage Temperature	Tstg	-40 ~ +90	℃
Thermal Resistance	Rth $_{J-A}$	600	K/W
	Rth $_{J-S}$	400	K/W
ESD (Classification acc. AEC Q101)	ESD_{HBM}	2000	V
	ESD_{MM}	200	V
Soldering Temperature	T_{sol}	Reflow Soldering : 260 ℃ for 10 sec. Hand Soldering : 350 ℃ for 3 sec.	

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 28.04.2014. Issue No: 1

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	225	-----	565	mcd	I_F=10mA
Viewing Angle	$2\theta_{1/2}$	-----	120	-----	deg	I_F=10mA
Peak Wavelength	λp	-----	518	-----	nm	I_F=10mA
Dominant Wavelength	λd	517.5	----	535.5	nm	I_F=10mA
Spectrum Radiation Bandwidth	Δλ	-----	35	-----	nm	I_F=10mA
Forward Voltage	V_F	2.5	----	3.5	V	I_F=10mA
Reverse Current	I_R	-----	-----	50	μA	V_R=5V

Note:
1. Tolerance of Luminous Intensity: ±11%
2. Tolerance of Dominant Wavelength: ±1nm
3. Tolerance of Forward Voltage: ±0.1V

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 28.04.2014. Issue No: 1

Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
S2	225	285	mcd	I_F =10mA
T1	285	360		
T2	360	450		
U1	450	565		

Note:
Tolerance of Luminous Intensity: ±11%

Bin Range of Dominant Wavelength

Bin Code	Min.	Max.	Unit	Condition
B10	517.5	519.5	nm	I_F =10mA
B11	519.5	521.5		
B12	521.5	523.5		
B13	523.5	525.5		
B14	525.5	527.5		
B15	527.5	529.5		
B16	529.5	531.5		
B17	531.5	533.5		
B18	533.5	535.5		

Note:
Tolerance of Dominant Wavelength: ±1nm

Bin Range of Forward Voltage


Bin Code	Min.	Max.	Unit	Condition
9	2.50	2.70	V	I_F =10mA
10	2.70	2.90		
11	2.90	3.10		
12	3.10	3.30		
13	3.30	3.50		

Note:
Tolerance of Forward Voltage: ±0.1V


Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 28.04.2014. Issue No: 1

Typical Electro-Optical Characteristics Curves


Spectrum Distribution

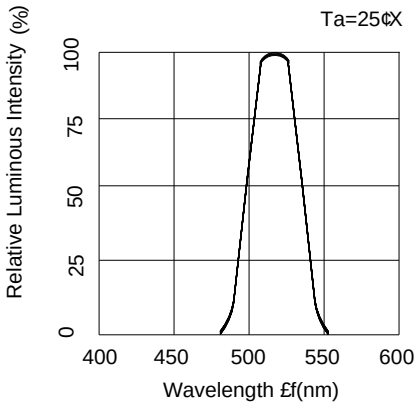


Forward Current vs. Forward Voltage

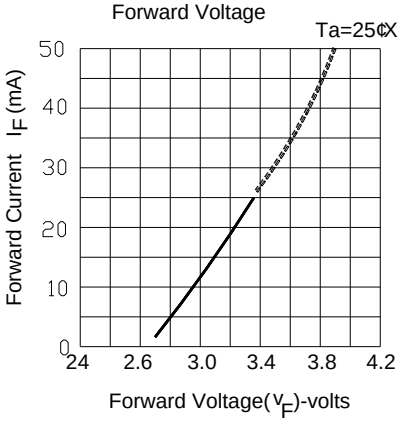


Relative Luminous Intensity vs. Ambient Temperature

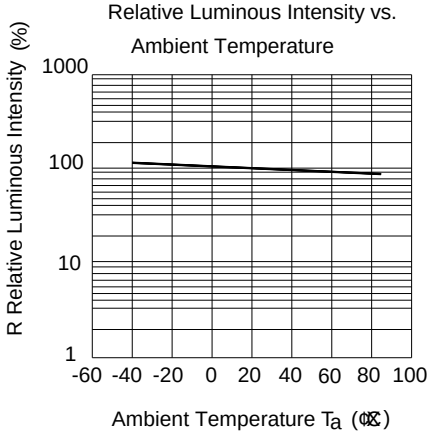


Relative Luminous Intensity vs Forward Current

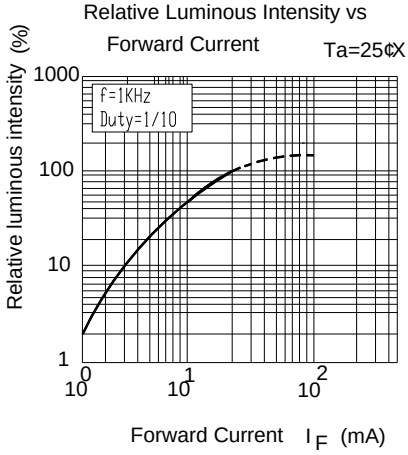

Forward Current Derating Curve

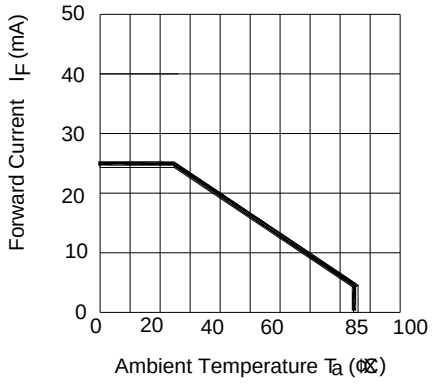


Radiation Diagram

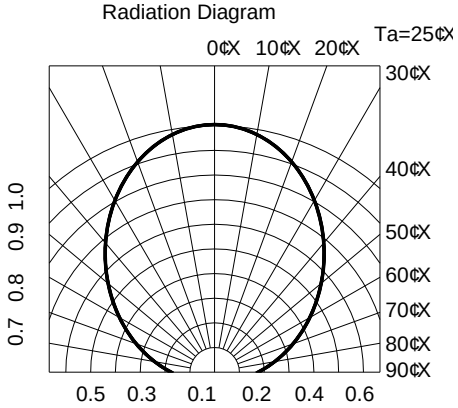

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 28.04.2014. Issue No: 1

Package Dimension

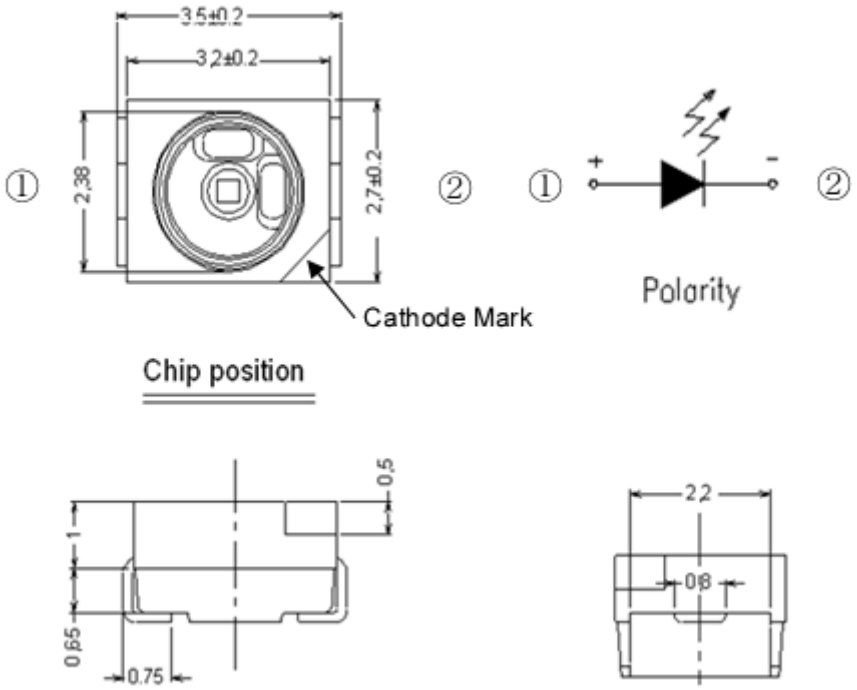

Note: Tolerances unless mentioned ±0.1mm. Unit = mm

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 28.04.2014. Issue No: 1


Moisture Resistant Packing Materials

Label Explanation




- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

Reel Dimensions

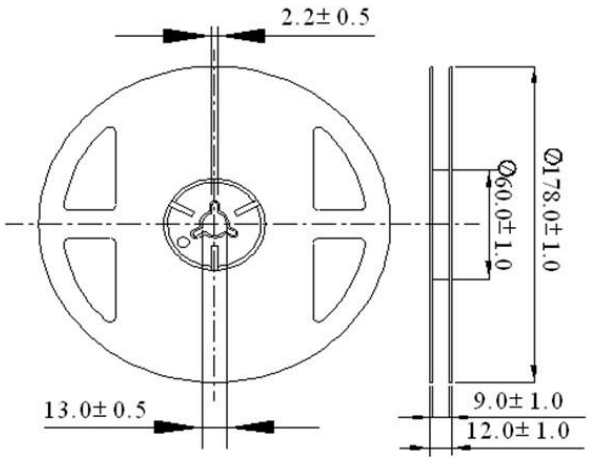


Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel

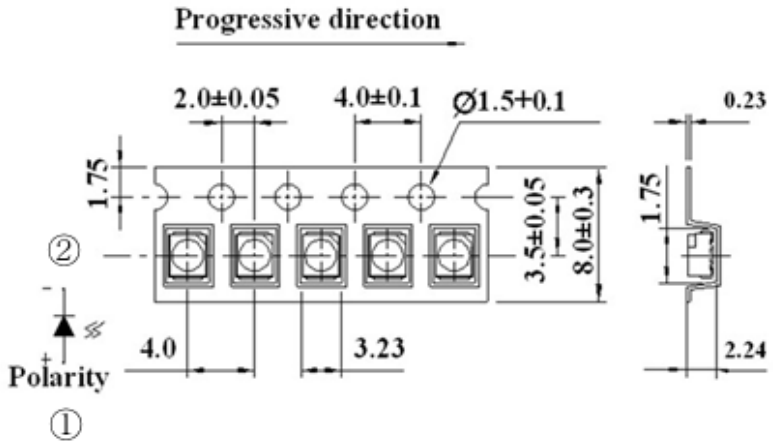

Note: Tolerances unless mentioned ±0.1mm. Unit = mm

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 28.04.2014. Issue No: 1

Moisture Resistant Packing Process

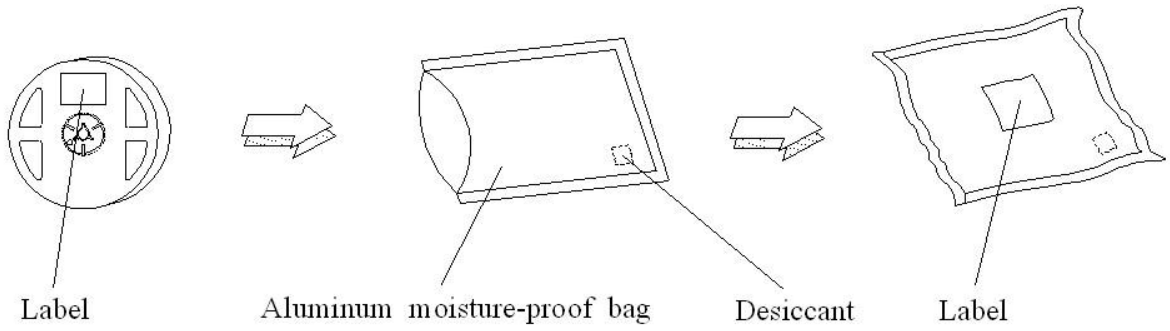


Note: Tolerances unless mentioned ±0.1mm. Unit = mm

Precautions for Use

1. Over-current-proof

1.1 Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

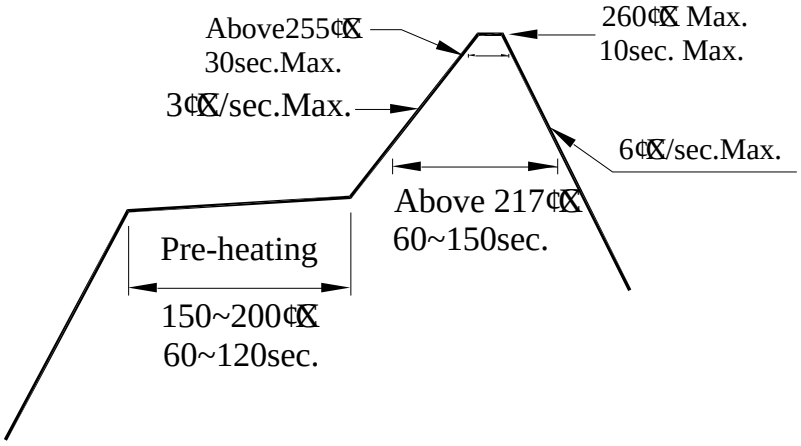

2. Storage

2.1 Moisture proof bag should only be opened immediately prior to usage.

2.2 Environment should be less than 30℃ and 60% RH when moisture proof bag is opened.

2.3 After opening the package MSL Conditions stated on page 1 of this spec should not be exceeded.

2.4 If the moisture sensitivity card indicates higher than acceptable moisture, the component should be baked at min. 60deg +/-5deg for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350℃ for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 28.04.2014. Issue No: 1

careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.

Revision History

Rev.	Modified date	File modified contents
1	2014/4/28	New Spec

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 28.04.2014. Issue No: 1