


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/29/04	
A		ADDED GROUND WIRE	5/27/11	

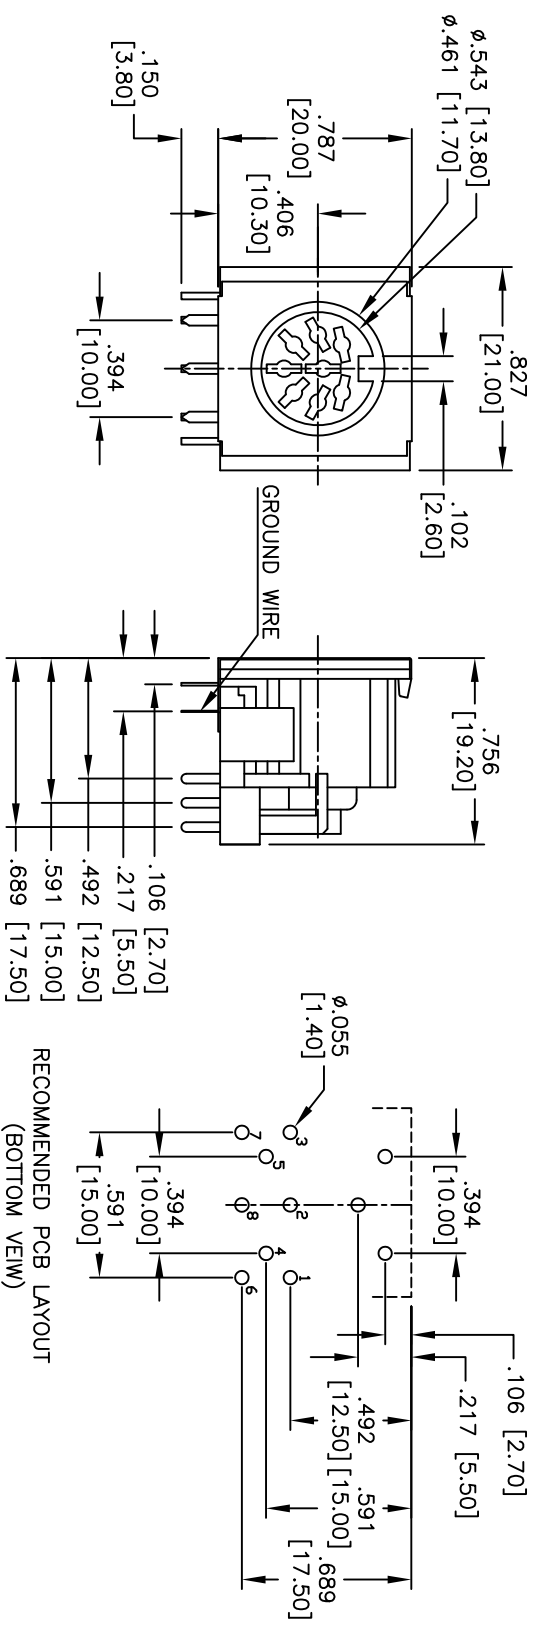

**MATING FACE CONFIGURATIONS**

Configuration	DJ-003-S	DJ-004-S	DJ-006-S	DJ-007-S	DJ-008-S

**SPECIFICATIONS:**

**Material:**  
 Insulator: PBT, glass reinforced, rated UL 94V-0  
 Insulator color: Black  
**Contacts:** Brass  
 Shield: Phosphor Bronze, Nickel plated  
 Plating:  
 Tin over Copper underplate overall

**Electrical:**  
 Operating voltage: 20 VDC max.  
 Current rating: 2 Amps max.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 500 Mohms min.  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +100°C  
**Environmental:**  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235° for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **DIN JACK, SHIELDED,**  
**.394 [10.00] CENTERLINE FRONT PINS**

SIZE	PART NO.	REV.
X	DJ-00X-S	A
REF: S0003C	SCALE: NTS	SHEET 1 OF 1