




- ▼ Capable of 2.5V Gate Drive
- ▼ Small Size & Lower Profile
- ▼ RoHS Compliant & Halogen-Free




$BV_{DSS}$	20V
$R_{DS(ON)}$	3.7mΩ
$I_D$	23.4A

## Description

AP9440 series are from Advanced Power innovative design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The PMPAK® 3x3 package is special for voltage conversion application using standard infrared reflow technique with the backside heat sink to achieve the good thermal performance.



PMPAK® 3x3

## Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	20	V
$V_{GS}$	Gate-Source Voltage	$\pm 12$	V
$I_D @ T_A=25^\circ C$	Continuous Drain Current <sup>3</sup>	23.4	A
$I_D @ T_A=70^\circ C$	Continuous Drain Current <sup>3</sup>	18.7	A
$I_{DM}$	Pulsed Drain Current <sup>1</sup>	60	A
$P_D @ T_A=25^\circ C$	Total Power Dissipation	3.13	W
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$T_J$	Operating Junction Temperature Range	-55 to 150	°C

## Thermal Data

Symbol	Parameter	Value	Unit
$R_{thj-c}$	Maximum Thermal Resistance, Junction-case	5	°C/W
$R_{thj-a}$	Maximum Thermal Resistance, Junction-ambient <sup>3</sup>	40	°C/W



## Electrical Characteristics @ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	20	-	-	V
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{\text{GS}}=4.5\text{V}, I_{\text{D}}=20\text{A}$	-	-	3.7	$\text{m}\Omega$
		$V_{\text{GS}}=2.5\text{V}, I_{\text{D}}=12\text{A}$	-	-	5	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}}=10\text{V}, I_{\text{D}}=1\text{mA}$	0.5	-	1.2	V
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=5\text{V}, I_{\text{D}}=12\text{A}$	-	48	-	S
$I_{\text{DSS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=16\text{V}, V_{\text{GS}}=0\text{V}$	-	-	10	$\text{uA}$
$I_{\text{GSS}}$	Gate-Source Leakage	$V_{\text{GS}}=\pm 12\text{V}, V_{\text{DS}}=0\text{V}$	-	-	$\pm 100$	nA
$Q_{\text{g}}$	Total Gate Charge	$I_{\text{D}}=12\text{A}$	-	48	77	nC
$Q_{\text{gs}}$	Gate-Source Charge		-	5	-	nC
$Q_{\text{gd}}$	Gate-Drain ("Miller") Charge		-	16	-	nC
$t_{\text{d(on)}}$	Turn-on Delay Time	$V_{\text{DS}}=10\text{V}$	-	14	-	ns
$t_{\text{r}}$	Rise Time	$I_{\text{D}}=1\text{A}$	-	16	-	ns
$t_{\text{d(off)}}$	Turn-off Delay Time	$R_{\text{G}}=3.3\Omega$	-	100	-	ns
$t_{\text{f}}$	Fall Time	$V_{\text{GS}}=10\text{V}$	-	54	-	ns
$C_{\text{iss}}$	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	4340	6950	pF
$C_{\text{oss}}$	Output Capacitance		-	540	-	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance		-	490	-	pF
$R_{\text{g}}$	Gate Resistance	$f=1.0\text{MHz}$	-	7.2	14.4	$\Omega$

## Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$I_{\text{S}}$	Continuous Source Current ( Body Diode )	-	-	3	A	
$V_{\text{SD}}$	Forward On Voltage <sup>2</sup>	$I_{\text{S}}=2.6\text{A}, V_{\text{GS}}=0\text{V}$	-	-	1.2	V
$t_{\text{rr}}$	Reverse Recovery Time	$I_{\text{S}}=10\text{A}, V_{\text{GS}}=0\text{V},$ $dI/dt=100\text{A}/\mu\text{s}$	-	23	-	ns
			-	13	-	nC

## Notes:

1. Pulse width limited by Max. junction temperature.
2. Pulse test
3. Surface mounted on 1 in<sup>2</sup> 2oz copper pad of FR4 board,  $t \leq 10\text{sec}$ ;  $210^\circ\text{C}/\text{W}$  when mounted on min. copper pad.

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

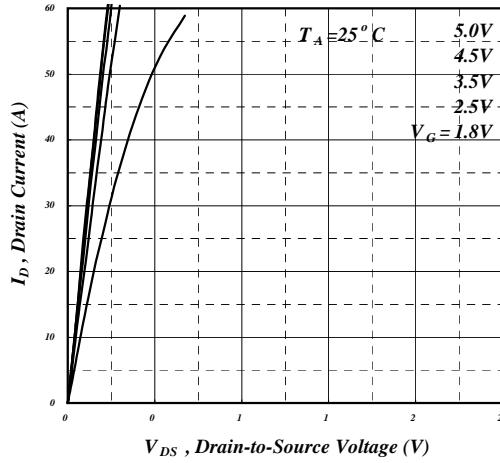


Fig 1. Typical Output Characteristics

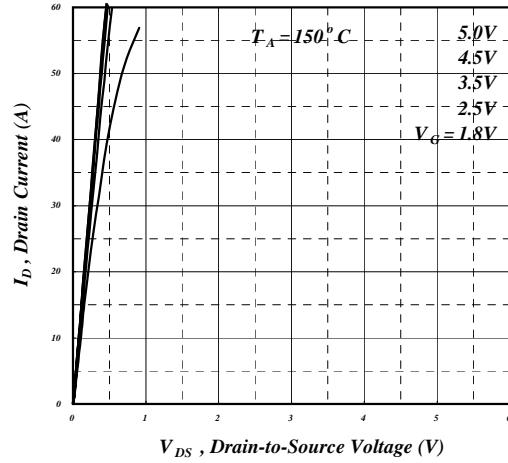


Fig 2. Typical Output Characteristics

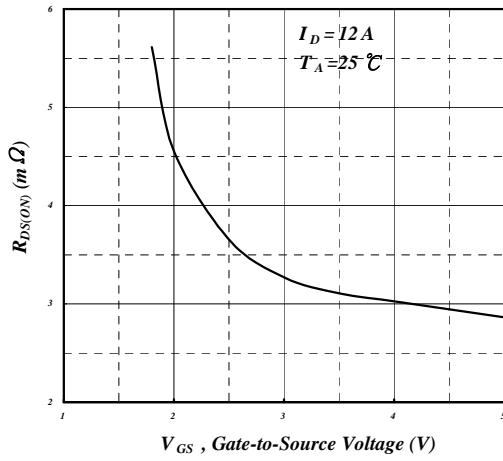


Fig 3. On-Resistance v.s. Gate Voltage

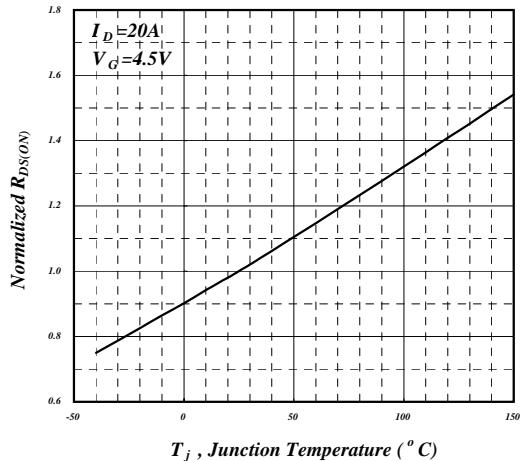


Fig 4. Normalized On-Resistance v.s. Junction Temperature

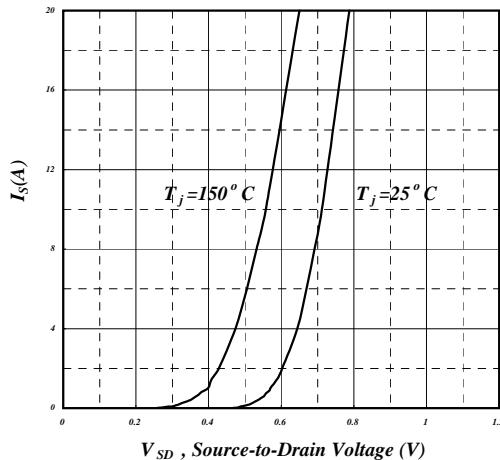


Fig 5. Forward Characteristic of Reverse Diode



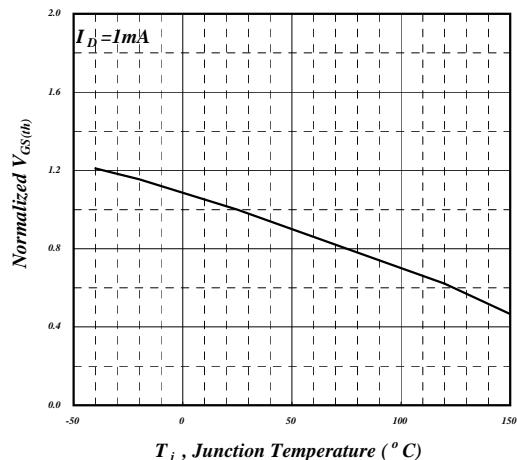


Fig 6. Gate Threshold Voltage v.s. Junction Temperature


# AP9440GYT-HF

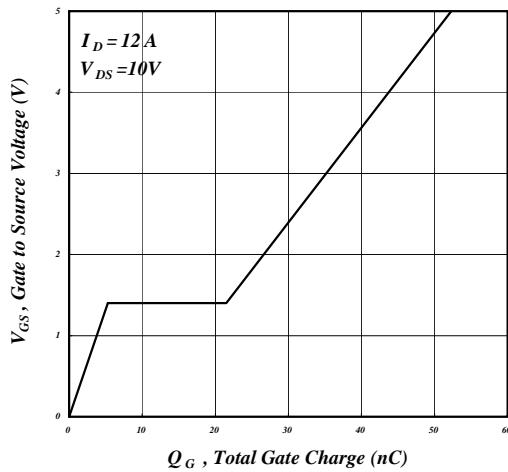


**Fig 7. Gate Charge Characteristics**

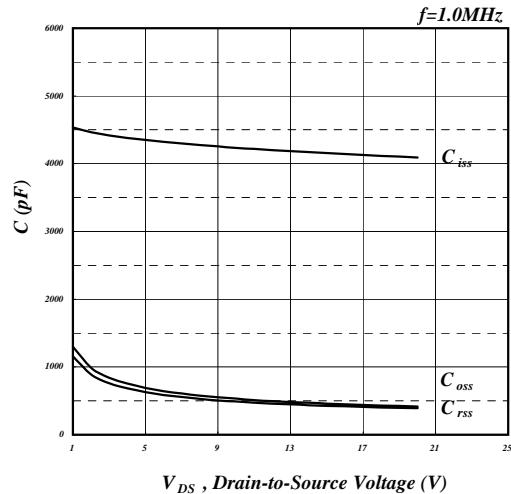


**Fig 8. Typical Capacitance Characteristics**

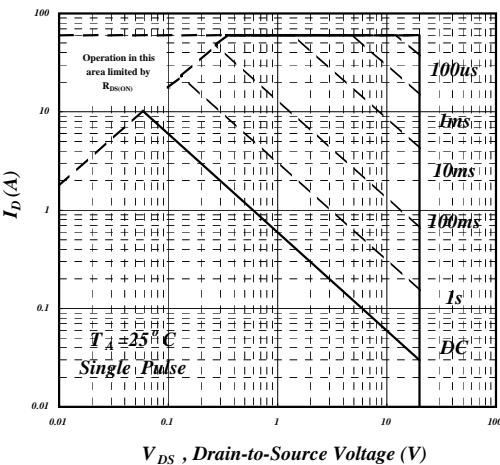


**Fig 9. Maximum Safe Operating Area**

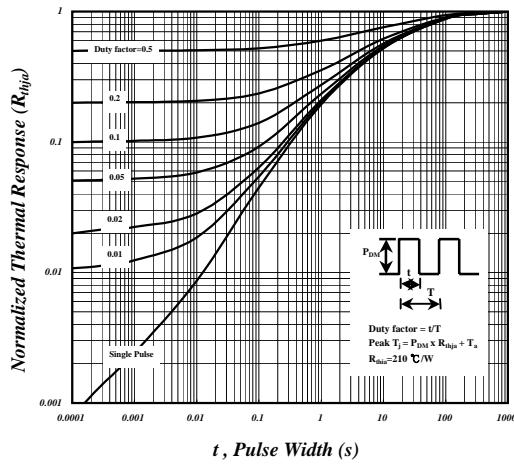

**Fig 10. Effective Transient Thermal Impedance**

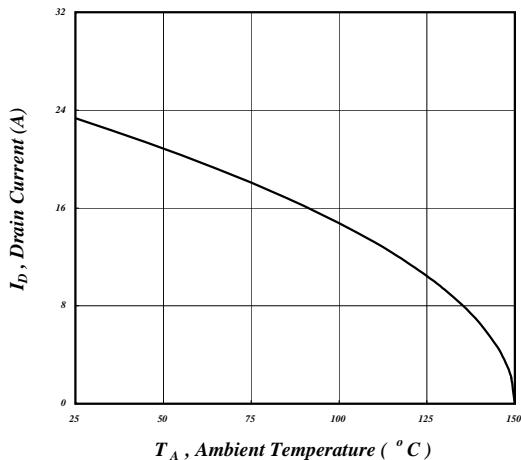

**Fig 11. Maximum Continuous Drain Current v.s. Ambient Temperature**

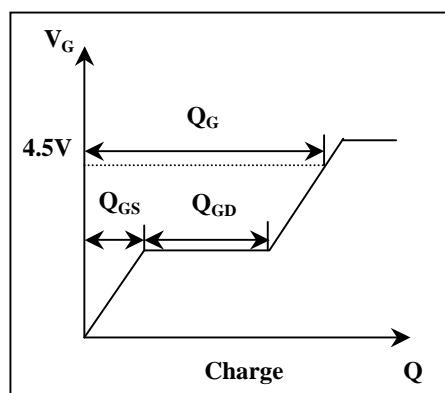

**Fig 12. Gate Charge Waveform**