
- Suitable for flat cables
- 4, 6 and 8 way available
- Selective gold plating contacts
- UL approved

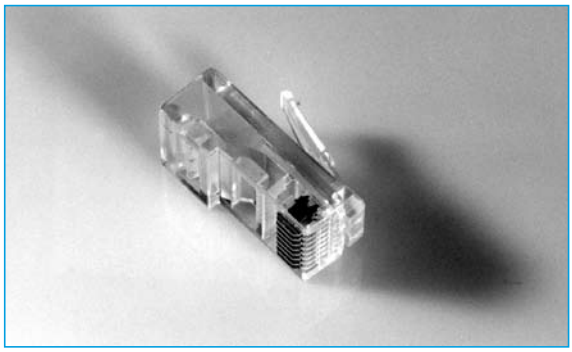

SPECIFICATION

Material

Mates with FCC-68 Style jacks
Plugs are available for standard or solid wire range 24-26 AWG (gauge).
One piece construction with prelocated contact

Housing: Polycarbonate, UL94V-O; UL94V-2
Contacts: Phosphor bronze, selective gold plated in contact area over 100 micro-inch nickel plated
Shield: Nickel Plated, brass


Mechanical


Cable to plug Tensile Strength: 20lbs (89N)min.
Durability; 200 mating cycle.


Electrical

UL Application: 150V AC max at 1.5 A
Dielectric Withstanding Voltage: 1,000 AC
Dielectric Withstanding Voltage: 1,000 AC
Insulation Resistance: 500 MΩ or more
Termination Resistance: 35 mΩ max after environmental testing

OUTLINE DRAWING

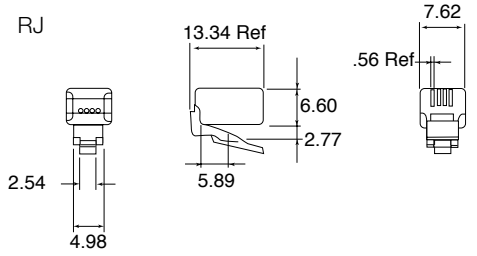

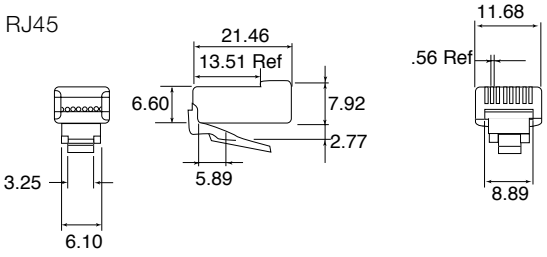

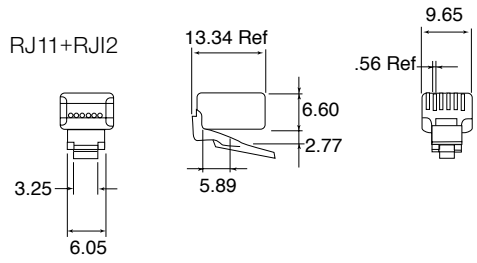



ORDERING INFORMATION

DBC	RJ45	P	88	F
Dubilier Connectors	Series	Connector Type	Nº of Ways x Nº of Loaded Contacts	Style
	RJ	P= Plug	4x2	F=Flat Cable Type Plug
	RJ		4x4	
	RJ11		6x4	
	RJ12		6x6	
	RJ45		8x8	

SECTION 16