Preliminary Data Sheet

Bipolar Power Transistors


NPN Silicon

- Collector –Emitter Sustaining Voltage — $V_{CEO(sus)}$
  = 30 Vdc (Min) @ I_C = 10 mAdc
- High DC Current Gain — h_{FE}
  = 85 (Min) @ I_C = 1.0 Adc
  = 60 (Min) @ I_C = 3.0 Adc
- Low Collector –Emitter Saturation Voltage — $V_{CE(sat)}$
  = 0.2 Vdc (Max) @ I_C = 1.2 Adc
  = 0.55 Vdc (Max) @ I_C = 5.0 Adc
- SOT–223 Surface Mount Packaging


MMJT9410

Motorola Preferred Device


POWER BJT
I_C = 3.0 AMPERES
B_{VCEO} = 30 VOLTS
$V_{CE(sat)}$ = 0.2 VOLTS



CASE 318E–04, Style 1



Schematic



Top View
Pinout

MAXIMUM RATINGS (T_C = 25°C unless otherwise noted)

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CEO}	30	Vdc
Collector–Base Voltage	V_{CB}	45	Vdc
Emitter–Base Voltage	V_{EB}	± 8.0	Vdc
Base Current — Continuous	I_B	1.0	Adc
Collector Current — Continuous — Peak	I_C	3.0 5.0	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C Total P_D @ T_A = 25°C mounted on 1” sq. (645 sq. mm) Drain pad on FR–4 bd material Total P_D @ T_A = 25°C mounted on 0.92” sq. (590 sq. mm) Drain pad on FR–4 bd material Total P_D @ T_A = 25°C mounted on 0.012” sq. (7.6 sq. mm) Drain pad on FR–4 bd material	P_D	3.0 0.025 2.0 1.5 0.8	Watts mW/°C Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance – Junction to Case – Junction to Ambient on 1” sq. (645 sq. mm) Drain pad on FR–4 bd material – Junction to Ambient on 0.92” sq. (590 sq. mm) Drain pad on FR–4 bd material – Junction to Ambient on 0.012” sq. (7.6 sq. mm) Drain pad on FR–4 bd material	$R_{\theta JC}$ $R_{\theta JA}$ $R_{\theta JA}$ $R_{\theta JA}$	40 60 85 156	°C/W
Maximum Lead Temperature for Soldering Purposes, 1/8” from case for 5 seconds	T_L	260	°C

This document contains information on a new product. Specifications and information are subject to change without notice.

Preferred devices are Motorola recommended choices for future use and best overall value.

© Motorola, Inc. 1997

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Sustaining Voltage (I_C = 10 mAdc, I_B = 0 Adc)	$V_{CEO(sus)}$	30	—	—	Vdc
Collector Cutoff Current (V_{CE} = 30 Vdc, R_{BE} = 200 Ω)	I_{CER}	—	—	20	μAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc)	I_{EBO}	—	—	10	μAdc
ON CHARACTERISTICS(1)					
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$				Vdc
(I_C = 0.8 Adc, I_B = 20 mAdc)		—	0.110	0.150	
(I_C = 1.2 Adc, I_B = 20 mAdc)		—	0.140	0.200	
(I_C = 5.0 Adc, I_B = 1.0 Adc)		—	—	0.550	
Base–Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 1.0 Adc)	$V_{BE(sat)}$	—	—	1.45	Vdc
Base–Emitter On Voltage (I_C = 1.2 Adc, V_{CE} = 4.0 Vdc)	$V_{BE(on)}$	—	—	1.10	Vdc
DC Current Gain	h_{FE}				—
(I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)		85	170	—	
(I_C = 1.2 Adc, V_{CE} = 1.0 Vdc)		80	—	—	
(I_C = 3.0 Adc, V_{CE} = 1.0 Vdc)		60	—	—	
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0 Adc, f = 1.0 MHz)	C_{ob}	—	80	135	pF
Input Capacitance (V_{EB} = 8.0 Vdc)	C_{ib}	—	200	—	pF
Current–Gain — Bandwidth Product(2) (I_C = 500 mA, V_{CE} = 10 Vdc, F_{test} = 1.0 MHz)	f_T	—	100	—	MHz

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

(2) $f_T = |h_{FE}| \cdot f_{test}$

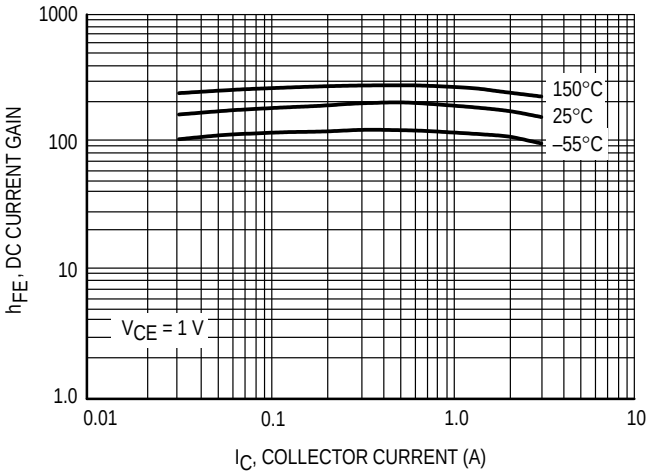


Figure 1. DC Current Gain

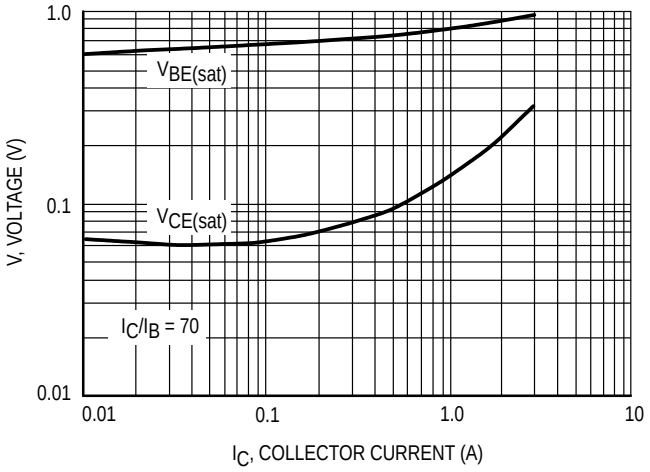


Figure 2. “ON” Voltages

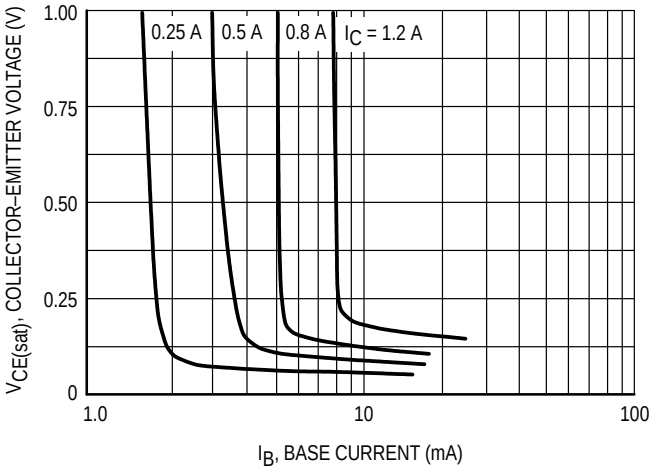


Figure 3. Collector Saturation Region



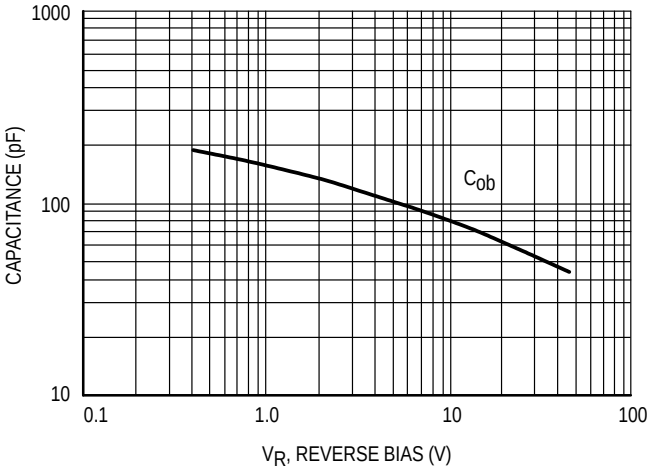


Figure 4. Capacitance

PACKAGE DIMENSIONS

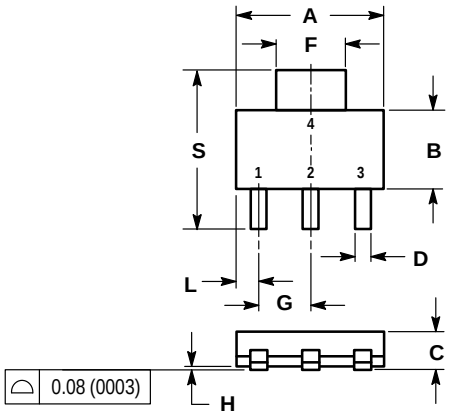

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR



NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.249	0.263	6.30	6.70
B	0.130	0.145	3.30	3.70
C	0.060	0.068	1.50	1.75
D	0.024	0.035	0.60	0.89
F	0.115	0.126	2.90	3.20
G	0.087	0.094	2.20	2.40
H	0.0008	0.0040	0.020	0.100
J	0.009	0.014	0.24	0.35
K	0.060	0.078	1.50	2.00
L	0.033	0.041	0.85	1.05
M	0 °	10 °	0 °	10 °
S	0.264	0.287	6.70	7.30

CASE 318E–04
ISSUE H

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:
USA / EUROPE / Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217. 303–675–2140 or 1–800–441–2447

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 602–244–6609
– US & Canada ONLY 1–800–774–1848

INTERNET: http://www.mot.com/SPS/

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 81–3–3521–8315

ASIA / PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298