


# M100A THRU M100M

## GENERAL PURPOSE PLASTIC RECTIFIER

Reverse Voltage - 50 to 1000 Volts    Forward Current - 1.0 Ampere

DO-204AL

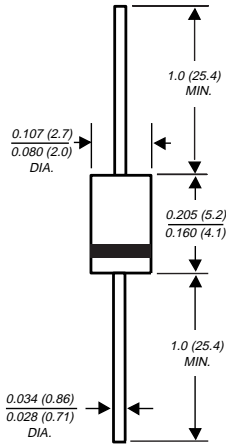

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension



### MECHANICAL DATA

**Case:** JEDEC DO-204AL, molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.012 ounce, 0.3 gram

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	M100 A	M100 B	M100 D	M100 G	M100 J	M100 K	M100 M	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at T <sub>A</sub> =100°C	I <sub>(AV)</sub>	1.0							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at T <sub>A</sub> =75°C	I <sub>FSM</sub>	50.0							Amps
Maximum instantaneous forward voltage at 1.0A	V <sub>F</sub>	1.0					1.1		Volts
Maximum full load reverse current full cycle average 0.375" (9.5mm) lead length at T <sub>A</sub> =55°C	I <sub>R(AV)</sub>	100.0							μA
Maximum DC reverse current at rated DC blocking voltage	I <sub>R</sub>	1.0					50.0		μA
		T <sub>A</sub> =25°C							
		T <sub>A</sub> =100°C							
Typical reverse recovery time (NOTE 1)	t <sub>rr</sub>	2.0							μs
Typical junction capacitance (NOTE 2)	C <sub>J</sub>	15.0							pF
Typical thermal resistance (NOTE 3)	R <sub>θJA</sub> R <sub>θJL</sub>	50.0 25.0							°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-50 to +150							°C

**NOTES:**

(1) Measured with I<sub>F</sub>=0.5A, I<sub>R</sub>=0.1A, I<sub>rr</sub>=0.25A

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(3) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length, P.C.B. mounted

# RATINGS AND CHARACTERISTIC CURVES M100A THRU M100M

FIG. 1 - FORWARD CURRENT DERATING CURVE

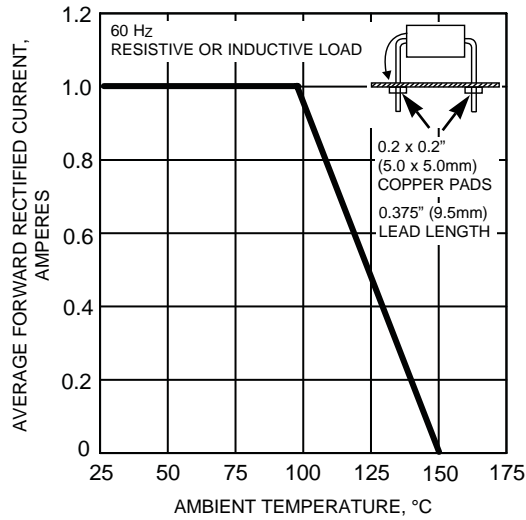


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

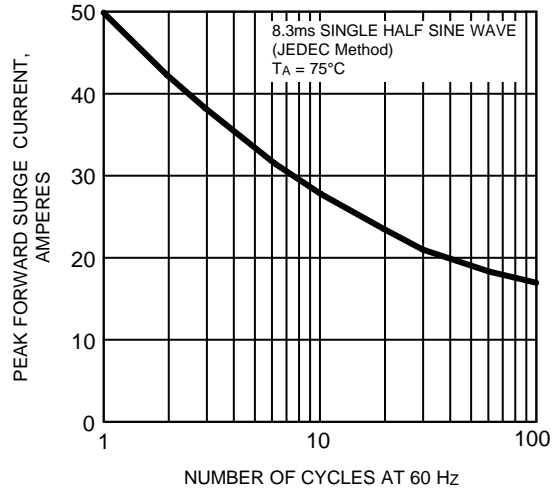


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

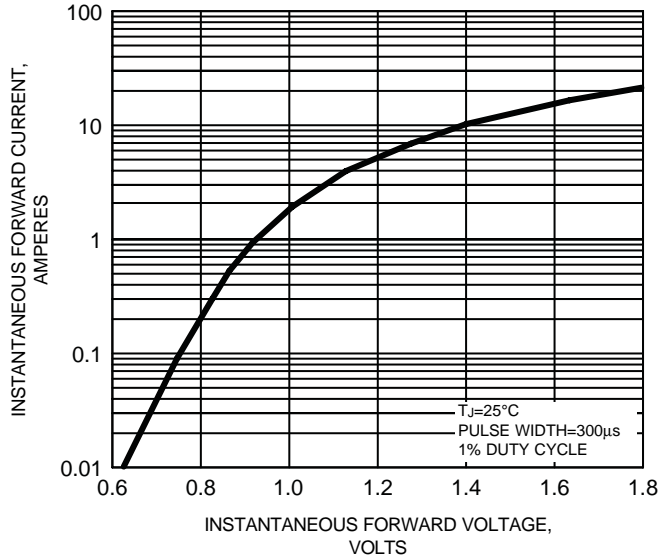


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

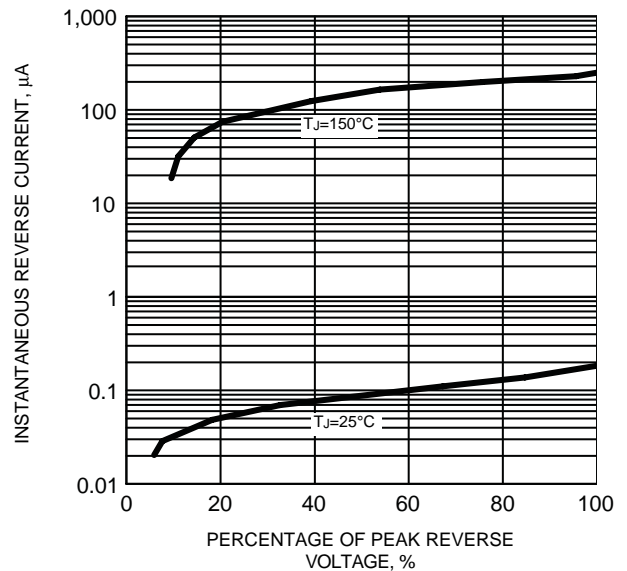


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

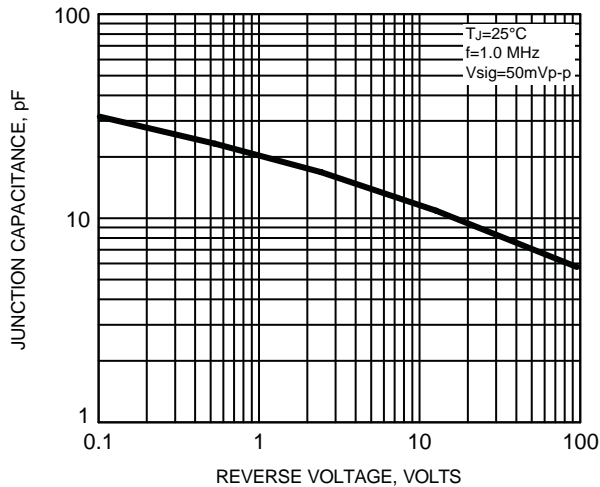


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

