


SHEET 1 OF 1




PANEL CUTOUT
MAX. PANEL THICKNESS
10.0mm [.315 in]



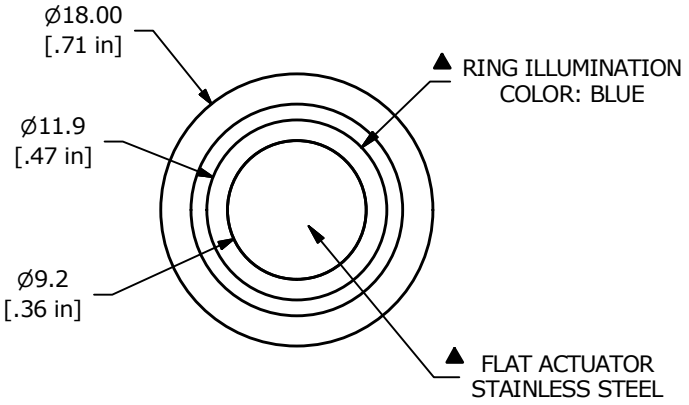



▲ LAMP INDICATOR
CONTACT CONFIGURATION

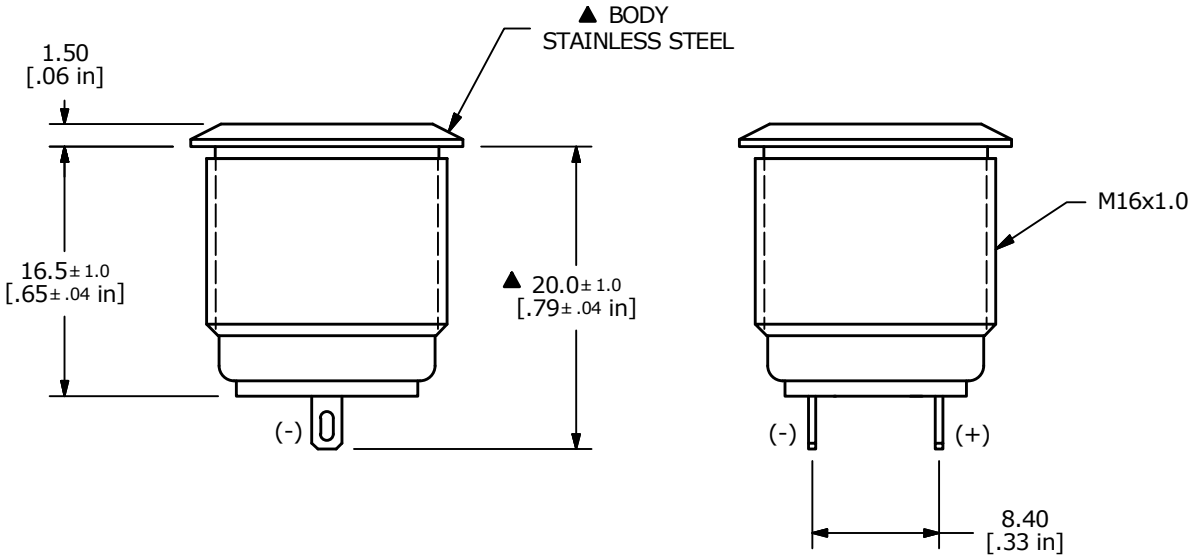

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. OPERATING TEMP.: -20°C to 55°C
4. ▲ DENOTES CRITICAL PARAMETER.
▲5. ILLUMINATION COLOR: BLUE
▲6. ILLUMINATION BASE RATING: 2.8V
▲7. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
8. 2011/65/EU (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	22730	RELEASE FOR PRODUCTION	2/20/17	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE PV6F2PXSS-341

SCALE	DATE	DR	DWG	REV
2:1	2/20/2017	MW	52-PV6F2PXSS341	A