

Smartcard Interface IC Solutions




Covering POS terminals, healthcare, transportation, access control, identity verification, wireless, pay television and more from ON Semiconductor.



Complete Solutions

ON Semiconductor provides a complete set of contact interfaces, with outstanding features such as:


- Compatibility with the latest ISO7816, EMV 4.1, and wireless standards
- Full bridge DC-DC power supply which offers conversion efficiency in excess of 75% with great noise and ripple reject
- Parallel or serial control port
- Programmable clock division ratio
- Large output current
- Card detect
- Chip select
- Ability to read Type C (1.8 V) SIM/SAM and Smartcards

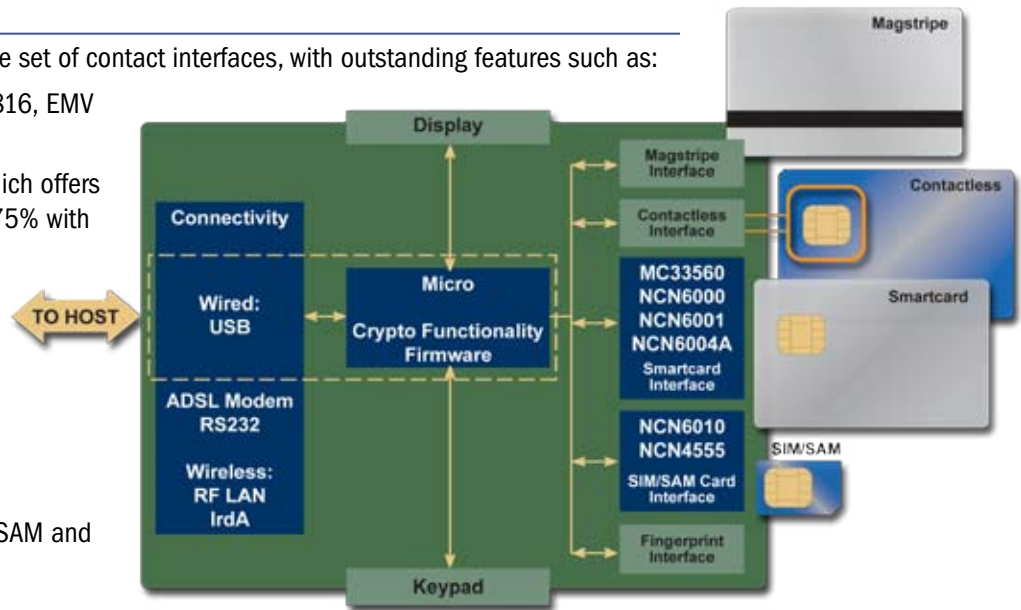

Smartcard Interface ICs

NCN6001

- Single SAM Interface (Security Access Module) & Smart Card Interface
- 2.7V-5.5V Input Voltage
- Fully compatible with ISO7816-3, EMV4.1 (May 2004), and GSM11.11
- Supports 1.8V/3V/5V Cards
- Full-bridge Buck-Boost DC-DC converter; eliminates the need for multiple power supplies
- High Efficiency DC-DC Converter
- Programmable Card Voltage, Supply Card Detection, and Clock Interface
- Three I/O Lines (I/O, C4 and C8) for Synchronous and Asynchronous Cards
- Supports 20 MHz Card Clock Frequency
- Chip Select Logic
- 8KV HBM ESD Protection on card pins
- TSSOP20 Package

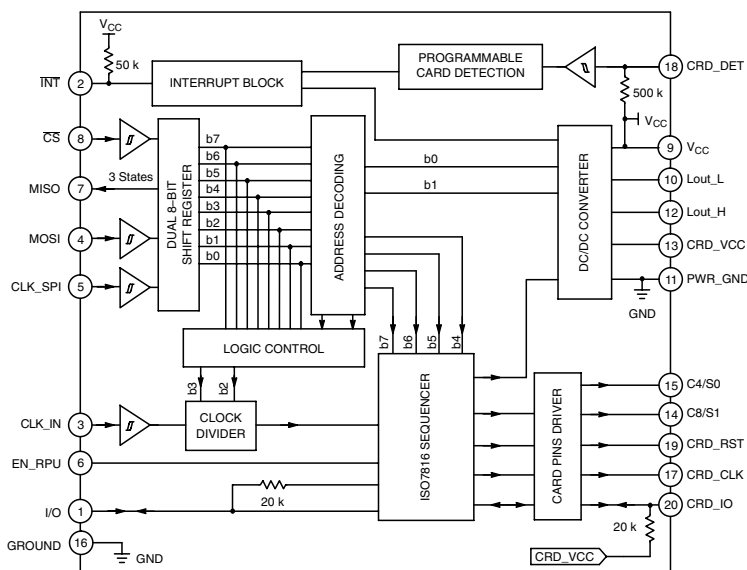

SIM/SAM Card Interface ICs

NCN4555/7


- Single & Dual SIM interface (Subscriber Identity Module)
- Sequencer on NCN4557
- 1.8 V - 5.5 V Digital Input Voltage
- Fully compatible with ISO7816-3, GSM11.11/11.12/11.18, IMT-2000 / 3G TS 31.101
- Supports 1.8 V / 3 V Cards
- Linear DC-DC Converter (LDO) able to supply current in excess of 50 mA at 1.8 V & 3 V (Vbat ranging from 2.7 V to 5.5 V)
- Very low stand-by and operating power consumption
- >5 MHz clock frequency
- >7 kV HBM ESD protection on SIM pins
- Low profile 3 mm x 3 mm QFN-16 package



NCN4555
Demo Board

SIM Interface Device Comparison

Product Features	NCN4555	NCN4557
Analog Interfaces	1 card	2 cards
Card Types (V)	1.8/3	1.8/3
Max Clock Frequency (MHz)	>5	>5
Power Supply (Type)	Built-In LDO-Type DC-DC	Built-In LDO-Type DC-DC
Power Supply (V)	2.7 - 5.5	2.7 - 5.5
Activation/Deactivation	No	Yes
Packaging	Low Profile QFN-16	Low Profile QFN-16
Temperature Range (°C)	-25 to +85	-25 to +85
Wireless Protocol	GSM 11.1x/3G TS 31.101	GSM 11.1x/3G TS 31.101
ESD Protection (kV)	8	8

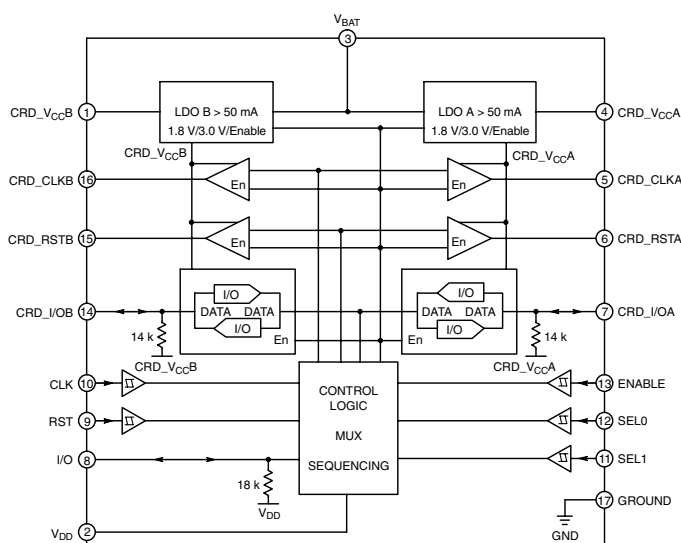


Smartcard Interface ICs from ON Semiconductor

Features	NCN6000	NCN6001	NCN6004A
Analog Interfaces	1 Card	1 Card	2 Cards
Card Types (V)	3/5	1.8/3/5	1.8/3/5
Protocol	Asynchronous	Asynchronous/Synchronous	Asynchronous/Synchronous
Max Clock Frequency (MHz)	20	20	20
Power Supply (Type)	Built-In DC-DC Converter	High Efficiency DC-DC Converter	High Efficiency DC-DC Converter
Power Supply (V)	2.7 - 6	2.7 - 5.5	2.7 - 5.5
Host Interface	Parallel	Serial (SPI)	Parallel
Packaging	TSSOP-20	TSSOP-20	TQFP-48
Temperature Range (°C)	-25 to +85	-25 to +85	-25 to +85
EMV Compliance	4.1	4.1	4.1
ESD Protection (kV)	8	8	8

Customer Support

ON Semiconductor provides a very comprehensive demo board for the NCN6001 device, allowing customers to evaluate the part in a real, working environment. The demo board is part of a package that includes user-friendly interface software and user's manual. The MPU code used in this application is also provided.

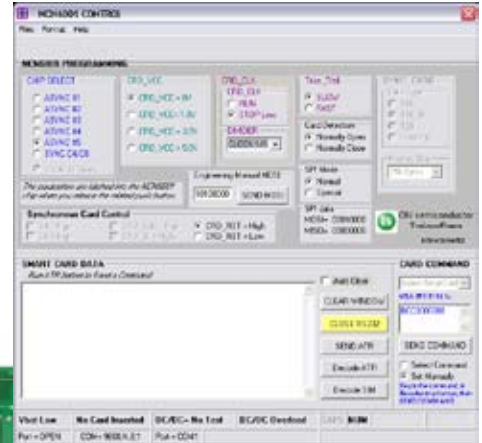

**NCN6001 Demo Board
and Visual Basic Based
Software Interface**



**NCN4557
Demo Board**

ON Semiconductor also offers demo boards for the SIM interfaces. They allow customers to fully evaluate the NCN6010, NCN4555 and NCN4557. These evaluation boards have been designed to easily interface with the customers' systems.

*For additional information and pricing, or to order demo boards or sample devices,
please visit our website at www.onsemi.com.*

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada.

Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

Japan Customer Focus Center
Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local
Sales Representative