



1. Dimensions:

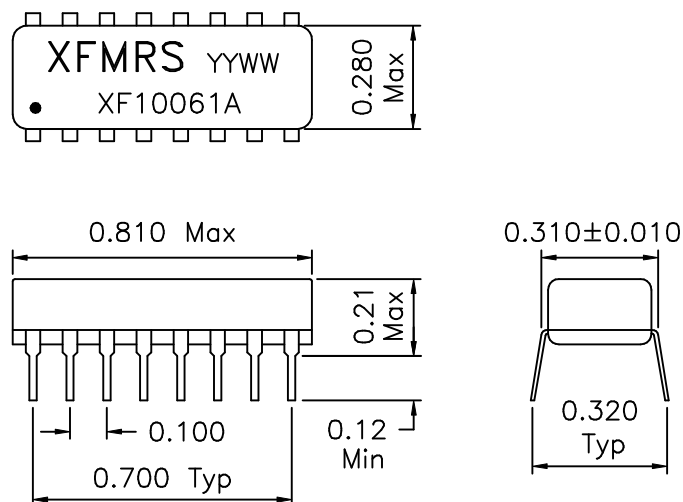

2. Schematic:

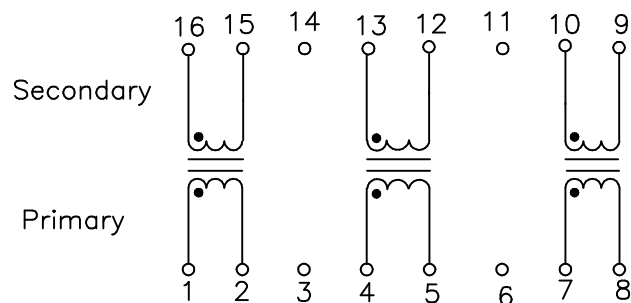

3. Electrical Specifications: @25°C

Isolation: 1500 Vrms for (PRI to SEC)

Turns Ratio: 1:1 $\pm 2\%$ (PRI:SEC)

PRI OCL: 100uH $\pm 20\%$ @100KHz 50mV

Cw/w: 10.0pF Maximum @100KHz 50mV (PRI/SEC)

PRI Leakage Inductance: 0.20uH Maximum
@100KHz 50mV SEC SHORTED

PRI DC Resistance: 0.20 Ohms Maximum

DOC. REV. A/2

XFMRS INC.		Title: 10 BASE-T ISOLATION MODULE	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ± 0.010 Dimensions in Inch	P/N: XF10061A		REV. A
	DWN.	廖玉坤	May-02-00
	CHK.	李清儿	May-02-00
SCALE 2:1 SHT 1 OF 1	APP.	Joe Huff	May-02-00