




PCB.layout




SPECIFICATION

Contact Rating:	50mA,12V DC
Contact Resistance:	500mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	100V AC/1minute
Travel:	0.15±0.05mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃
Operating Life:	100000cycles


PAPT NO	TS-2030-X
Operating Force	B:160gf C:260gf
Height	H:0.58

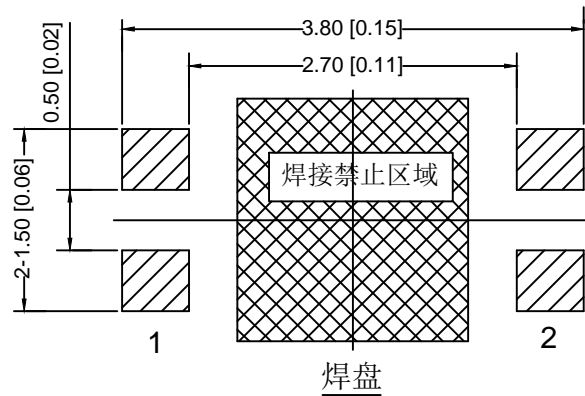

焊盘


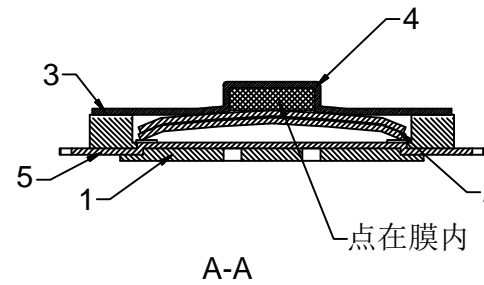


A-A

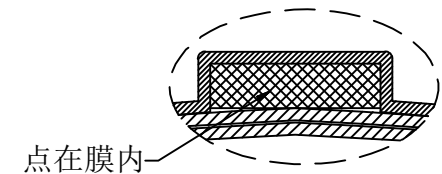

SCALE B=2/1

Circuit Diagram

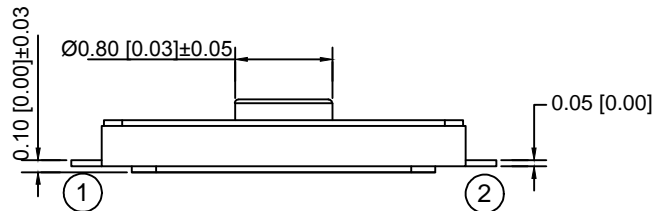

5	Terminal		1	C5191	Plating silvering	
4	Keystake		1	PI	black	
3	Film		1	PI	white	
2	Contact		2	SUS	ag	
1	Base		1	PA	black	
ITEM	PAPT NAMF	TER.NO	QTY	MATERLAL	FINISHING	REMARK

					ANGLAR	±5°
Δx					L ≤ 4	±0.2
Δx					4 < L ≤ 16	±0.3
Δx					16 < L ≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

DSND	SCALE: N/A	MODEL TYPE:	TS-2030-X
DWN	VIEW:	PART NO.:	
CHKD	UNIT: mm/in	DWG NO.:	X-TS-2030-X
APPD	SIZE: A4	WEIGHT	
XKB INDUSTRIAL PRECISION CO., LIMITED		SHEET	1/1
		REVISION	A0