

Material:

- Housing: PBT+30%GF UL 94V-0
- Contact: Brass
- Shell: SPCC
- Contact: 5μ Gold Contact Plating over Nickel Plated
- Shell: Nickel Over All Plating

Electrical:






- Voltage Rating: 30V
- Current Rating: 1.5A
- Contact Resistance Terminal: 30MΩ Max
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: 1000MΩ Min

Mechanical:

- Mating: 35N Max
- Withdrawl Force: 10N Min
- Durability: 1500 Cycles Min

Environmental:

- Temperature Range: -20°~+85°C

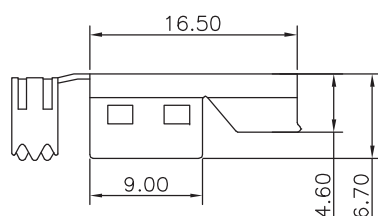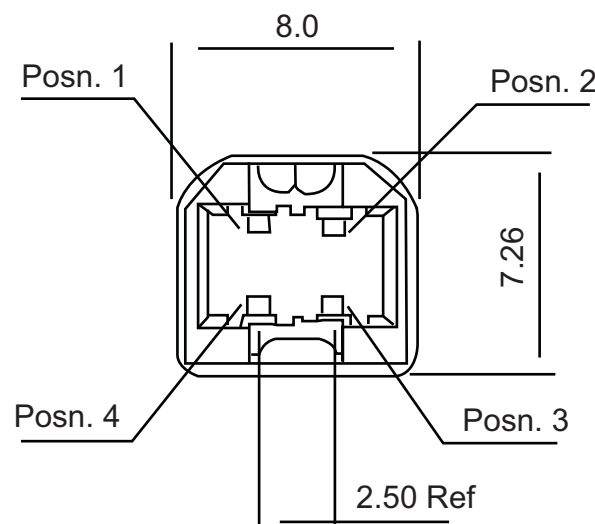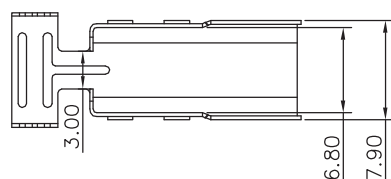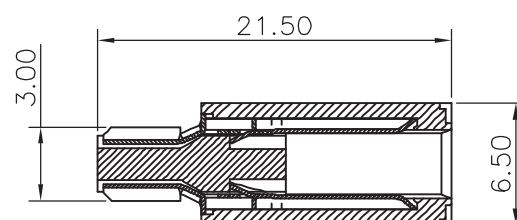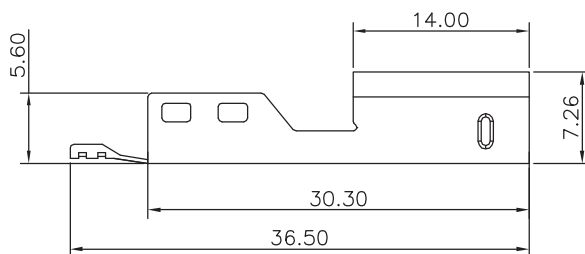

Unit: MM±0.15MM

[illegible]

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-USBPB-R

Title	USB, Type B, Assembly-Type, Version 1.1
--------------	---

Drawing No.

rev00

Replace

Sheet

