

## 1. Mechanical Dimensions:

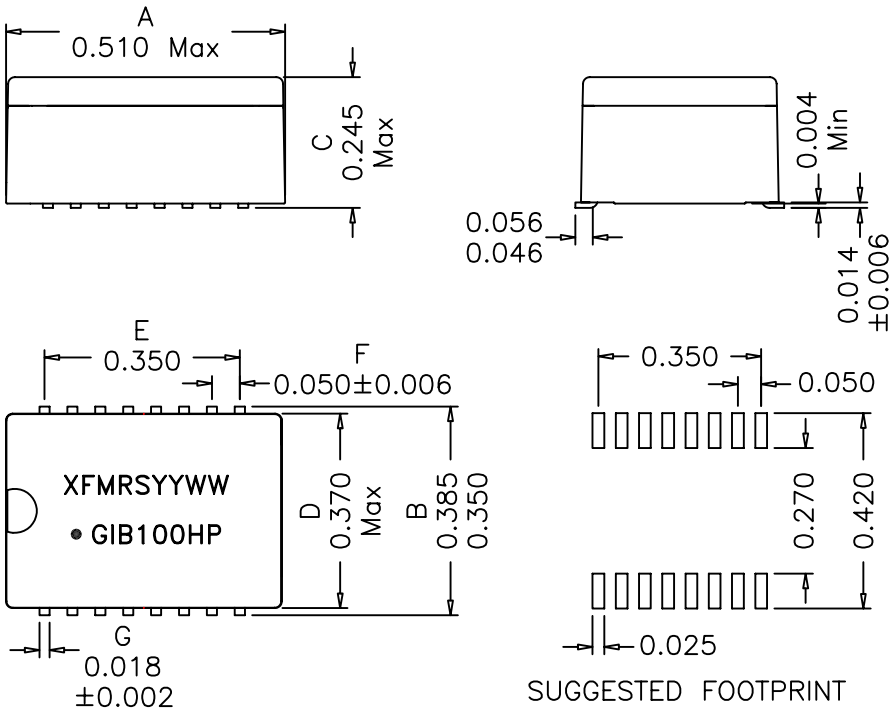


## 2. Schematic:

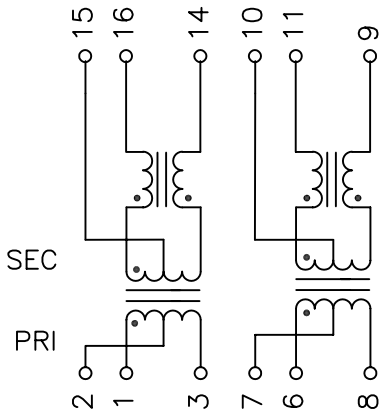


## 3. Electrical Specifications: @25°C

ISOLATION: 1500 Vrms

TURNS RATIO: (PRI/SEC) 1CT:1CT ±2%

OCL: 350uH MIN @100KHz 100mV 8mADC

Q: 16 MIN @10KHz 50mV

Rise Time: 1.75ns Max.

INSERTION LOSS: −1.0dB MAX @1MHz−100MHz

RETURN LOSS: −18dB Min @1−30MHz
−15dB Min @40MHz −13.1dB Min @50MHz
−12dB Min @60−80MHz −10dB Min @100MHz

Differential to Common Mode Rejection:
−43dB Min @30MHz −37dB Min @80MHz
−33dB Min @100MHz

CMRR: −30dB Min @1−100MHz

Crosstalk: −45dB Min @30MHz
−40dB Min @60MHz −35dB Min @100MHz

Notes:

1. Solderability: Leads shall meet MIL−STD−202G, Method 208H for solderability.
2. Flammability: UL94V−0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from −40°C to +85°C
6. Storage Temperature Range: −55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

DOC. REV: E/2

| | | | |
|---|---|---|---|
| XFMRS Inc. www.XFMRS.com | Title: Half Port 1000BASE−T Modules | | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch | P/N: XFGIB100HP | | REV. E |
| | DWN. | Feng | Dec−23−11 |
| | CHK. | YK Liao | Dec−23−11 |
| SHT 1 OF 1 | APP. | BW | Dec−23−11 |

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.