

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0250021006

Status:

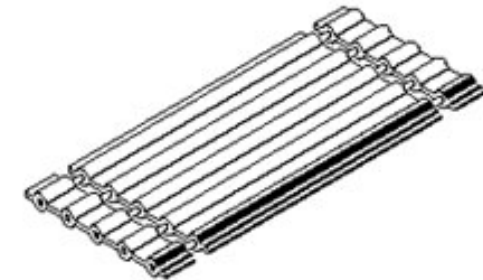
Active

Overview:

ribbon_cable_jumpers

Description:

2.54mm (.100") Pitch Board-to-Board Ribbon Cable Jumper - 24 AWG, Stranded Topcoat, 10 Circuits, Strip and Retain, 0.152m (6.00") Length



Series

image - Reference only

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family	Cable
Series	25002
Crimp Quality Equipment	Yes
Geographic Area	Asia
Overview	ribbon_cable_jumpers
Product Name	Ribbon

Physical

Cable Length	0.152m (6.00")
Circuits (Loaded)	10
Circuits (maximum)	10
Insulation	PVC
Packaging Type	Bag
Pitch - Term. Interface (in)	0.100 In
Pitch - Term. Interface (mm)	2.54 mm
Temperature Range - Operating	-20°C to +105°C
Wire Size AWG	24
Wire/Cable Type	(7x32) Stranded, Topcoat

Electrical

Current - Maximum per Contact	N/A
Voltage - Maximum	300V

Material Info

Reference - Drawing Numbers

Sales Drawing	SD-25002-001
---------------	--------------

EU RoHS

ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status

China RoHS



Need more information on product
environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

25002Series

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

CABLE SPECIFICATIONS:

1.- STANDARD JUMPER SERIES #25002 (8997 CABLE, .125" S/R BOTH ENDS)

2.- PHYSICAL

CONDUCTOR SPACING ----- .100" (2.54mm) C TO C
WIRE GAUGE ----- 24 AWG (7/32), TOPCOAT
INSULATION ----- GRAY PVC
EDGE MARK COLOR ----- RED

3.- AGENCY

U.L. STYLE ----- 2651
TEMPERATURE RATING ----- -20 °C TO 105 °C
VOLTAGE RATING ----- 300V. MAX.
FLAMMABILITY RATING ----- VW-1

4.- SPECIAL REQUIREMENT

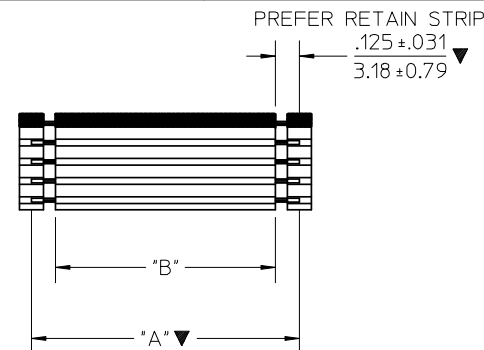
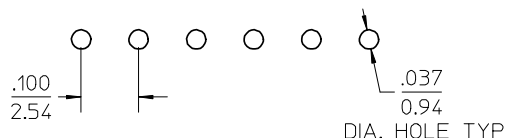
RoHS AND LEAD FREE COMPLIANT
NO TEXT MARKING ON FCB

5.- GENERAL

NON-OPERATING TEMPERATURE-----20°C TO 105°C

6.- SOLDERING CONDITION

SOLDER TEMPERATURE-----260°C. MAX.
SOLDERING TIME-----3 SECOND. MAX.
INSULATION SHRINK-----2MM. NOM

PCB HOLE LAYOUT
RECOMENDED HOLE DIA. .037 In.

OVERALL LENGTH ("A")
TOLERANCE FOR OAL +/- .100"
INSULATION LENGTH ("B" REF.)
DIMS "A" & "B" REFERS TO
SHOWN IN MATRIX.

MATRIX FOR STANDARD JUMPERS SERIES # 25002 (8997 CABLE .125" S/R BOTH ENDS)

LENGTH "A" (±.100")	1.250"	2.250"	3.250"	4.250"	5.250"	6.250"	7.250"	8.250"
LENGTH "B" (REF.)	1.000"	2.000"	3.000"	4.000"	5.000"	6.000"	7.000"	8.000"
2	25002-0201	25002-0202	25002-0203	25002-0204	25002-0205	25002-0206	25002-0207	25002-0208
3	25002-0301	25002-0302	25002-0303	25002-0304	25002-0305	25002-0306	25002-0307	25002-0308
4	25002-0401	25002-0402	25002-0403	25002-0404	25002-0405	25002-0406	25002-0407	25002-0408
5	25002-0501	25002-0502	25002-0503	25002-0504	25002-0505	25002-0506	25002-0507	25002-0508
6	25002-0601	25002-0602	25002-0603	25002-0604	25002-0605	25002-0606	25002-0607	25002-0608
7	25002-0701	25002-0702	25002-0703	25002-0704	25002-0705	25002-0706	25002-0707	25002-0708
8	25002-0801	25002-0802	25002-0803	25002-0804	25002-0805	25002-0806	25002-0807	25002-0808
9	25002-0901	25002-0902	25002-0903	25002-0904	25002-0905	25002-0906	25002-0907	25002-0908
10	25002-1001	25002-1002	25002-1003	25002-1004	25002-1005	25002-1006	25002-1007	25002-1008

25002-****
A B C

A = STD. JUMPER I.D. No

B = CIRCUIT SIZE
2 THRU 10

C = DENOTES LENGTH
1.000" TO 8.000"

B	E-07-0793	B ₁ : ADD GENERAL & SOLDERING CONDITION DATA	07/12/06
A	THL2006-0005	NEW RELEASE	06/06/01
REV.	HISTORY	EC NO.	DETAIL
			DATE

SEE CHANGE DETAIL
EC NO: THL2008-0019
DRWN: CPANSAXHOM 2007/12/07
CHKD: NCHALERM 2007/12/11
APPR: SVIRATJAPOL 2007/12/20

QUALITY SYMBOLS
▽=3
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
ANGULAR	± ---°	

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY	DATE
CPANSAXHOM	2006/06/01
CHECKED BY	DATE
PMEECHAI	2006/06/01
APPROVED BY	DATE
SVIRATJAPOL	2006/06/01
MATERIAL NO.	

SCALE
NTSDESIGN UNITS
INCHTHIRD ANGLE
PROJECTION

STANDARD JUMPER
.100" CTRS PVC INSULATED
24 AWG TOPCOATED



MOLEX INCORPORATED

DOCUMENT NO.

SD-25002-001

SHEET NO.

1 OF 1

SEE CHART

SIZE
A 4

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION