

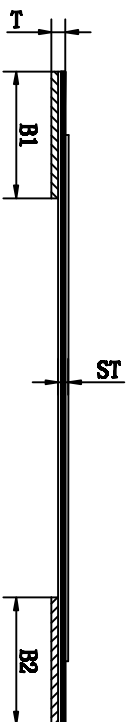


客户确认

日期

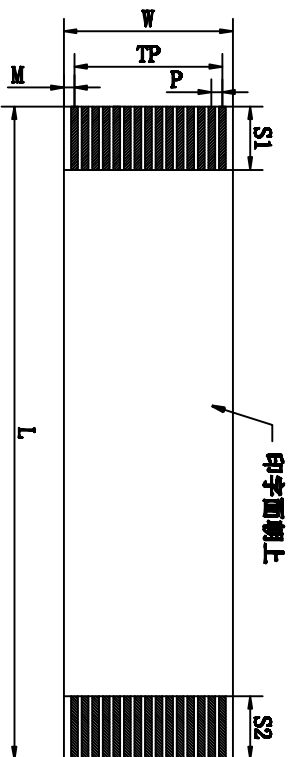

ELECTRICAL CHARACTERISTICS

Conductor Resistance: JISC-3102(at20°C) 2.20Ω/KM Max.

Insulation Resistance: Apply the voltage of DC 500V for one min 100M Ω Min.

Dielectric Strength: Apply AC 500V for one minute.

**Continuity Test: Apply microtest machine No Open/Short
Rated voltage & temperature:UL Sub. 758W-1**

Material

Insulation: Flame Retardant Polyester

Color: White

Conductor: Copper with 1u m min. tin-Plating

Supporting Tape: Flame Retardant Polyester

Color: Blue

Symbol 标号	Item 项目	Specification 规格
N	No. of Conductors (导体芯数)	8
P	Pitch (间距)	0.5±0.05
TP	Total Pitch (总间距)	3.5±0.10
W	Width (总宽度)	4.5±0.10
M	Margin (边缘宽度)	0.5±0.10
L	Total Length (总长度)	80±3
T	Insertion Thickness (插入厚度)	0.30±0.05
ST	Surface Thickness (线身厚度)	0.12±0.05
SI/S2	Conductor Strip Length (裸铜长度)	4/4±1.0
B1/B2	Supporting tape Length (补强板长度)	8/8±2.0
AI	Slanting (线口倾斜度)	<0.5

救済

日期:

深圳市灿科盟实业有限公司
CKMTW CHANKEMENG INDUSTRY CO., LTD

业务:

日期:

品名规格:

FFCO. 5-8P L=80MM 4/4-8/8 同面

畫圖

日期:

吾ノ科ヲ	共ニ
------	----

单位

arm

比例

—



LYE

2022-06-10

图 纸 编 号

F-FFCOK08P-0800

版本	A
----	---