


SERIES: SR3 | **DESCRIPTION:** SIGNAL RELAY**FEATURES**

- 3~24 Vdc coil voltage
- 150-175 mW coil power
- contact form 1C

**MODEL**

| MODEL | coil voltage typ (Vdc) | coil resistance ($\Omega \pm 10\%$) | operating voltage min (Vdc) | release voltage max (Vdc) | coil power typ (mW) |
|----------------|---------------------------------------|---|--|--|------------------------------------|
| SR3-3V-150-1C | 3 | 60 | 2.25 | 0.3 | 150 |
| SR3-5V-150-1C | 5 | 167 | 3.75 | 0.5 | 150 |
| SR3-9V-150-1C | 9 | 540 | 6.75 | 0.9 | 150 |
| SR3-12V-150-1C | 12 | 960 | 9.0 | 1.2 | 150 |
| SR3-24V-175-1C | 24 | 3,291 | 18.0 | 2.4 | 175 |

Notes: 1. All specifications are measured at 23°C unless otherwise specified.

PART NUMBER KEY**SR3 - XX - 150 - 1C**

Base Number

Coil Voltage (Vdc):

3V = 3

5V = 5

9V = 9

12V = 12

24V = 24

CONTACT SPECIFICATIONS


| parameter | conditions/description | min | typ | max | units |
|-----------------------|--------------------------|-----|----------------------|-----------|--------------------------|
| contact form | 1 Form C | | | | |
| contact material | AuAg overlay | | | | |
| contact rating | 1 A @ 125 Vac, 24 Vdc | | | | |
| contact resistance | at 6 Vdc, 0.1 A | | | 50 | mΩ |
| max switching voltage | | | | 125 60 | Vac Vdc |
| max switching current | | | | 2 | A |
| max switching power | | | | 250 48 | VA W |
| min switching load | 5 Vdc, 10 mA | | | | |
| life | electrical mechanical | | 100,000 5,000,000 | | operations operations |

GENERAL SPECIFICATIONS

| parameter | conditions/description | min | typ | max | units |
|-----------------------|---|-------|--------------|-----|--------------------------------------|
| insulation resistance | at 500 Vdc | 1,000 | | | MΩ |
| dielectric strength | between open contacts for 1 minute between coil and contacts for 1 minute | | 500 1,000 | | Vac Vac |
| operate time | | | | 5 | ms |
| release time | | | | 5 | ms |
| shock resistance | endurance misoperation | | 1,000 100 | | m/s ² m/s ² |
| vibration resistance | endurance: 10~55 Hz, 1.5 mm double amplitude misoperation: 10~55 Hz, 1.5 mm double amplitude | | | | |
| operating temperature | | -40 | | 70 | °C |
| humidity | at 40°C | 35 | | 95 | %RH |
| weight | | | 2.2 | | g |
| safety approvals | UL/cUL 508 | | | | |
| flammability rating | UL94V-0 | | | | |
| RoHS | yes | | | | |
| packaging | tube: 25 pcs per tube carton size: 390 x 301 x 148 mm carton QTY: 2,000 pcs per carton | | | | |

SOLDERABILITY


| parameter | conditions/description | min | typ | max | units |
|----------------|------------------------|-----|-----|-----|-------|
| hand soldering | for 3.5±0.5 seconds | 340 | 350 | 360 | °C |
| wave soldering | for 10±1 seconds | 255 | 260 | 265 | °C |

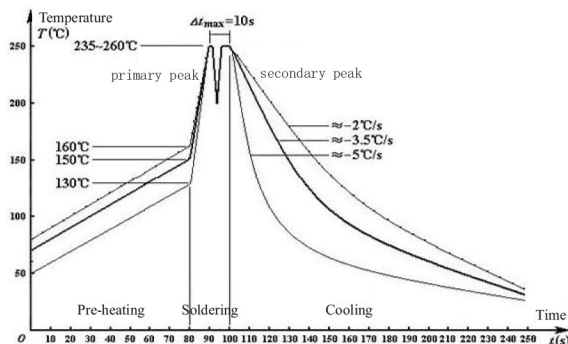




Double-wave Soldering Curve

MECHANICAL DRAWING

units: mm
tolerance: ± 0.3 mm
unless otherwise noted

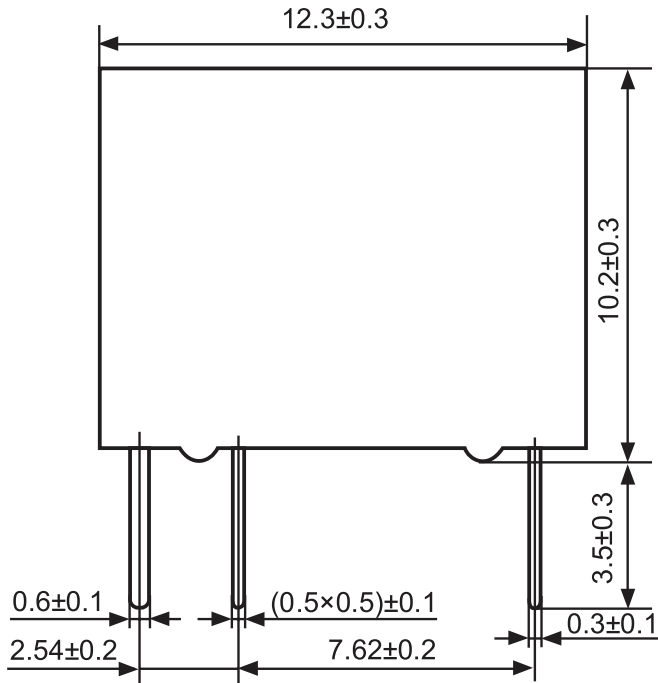


| ITEM | DESCRIPTION | MATERIAL | PLATING/COLOR |
|------|-------------|----------------------|---------------|
| A | housing | PBT (UL94V-0) | black |
| B | terminals | copper covered steel | tin |

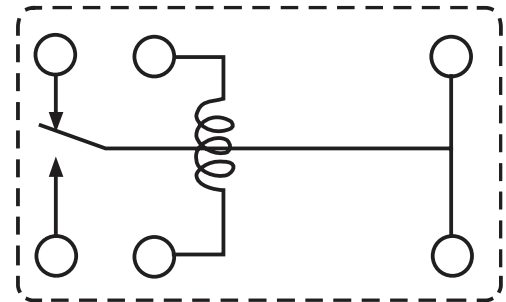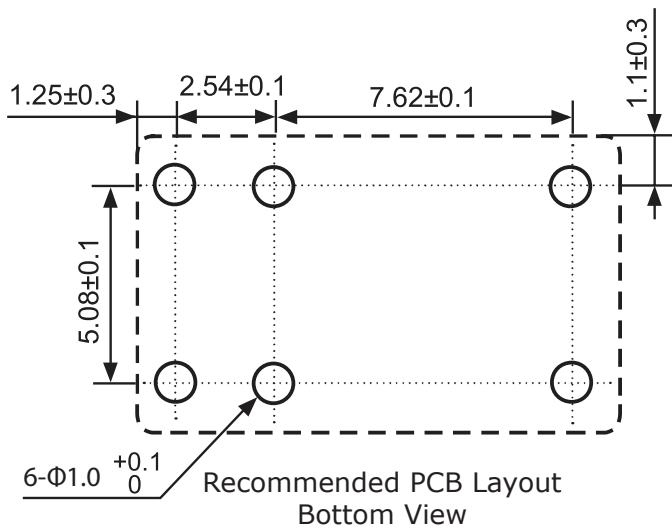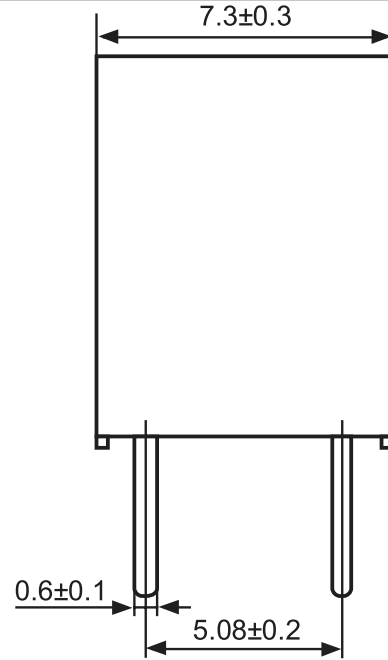


Wiring Diagram
Bottom View

CHARACTERISTIC CURVES


Time Curve

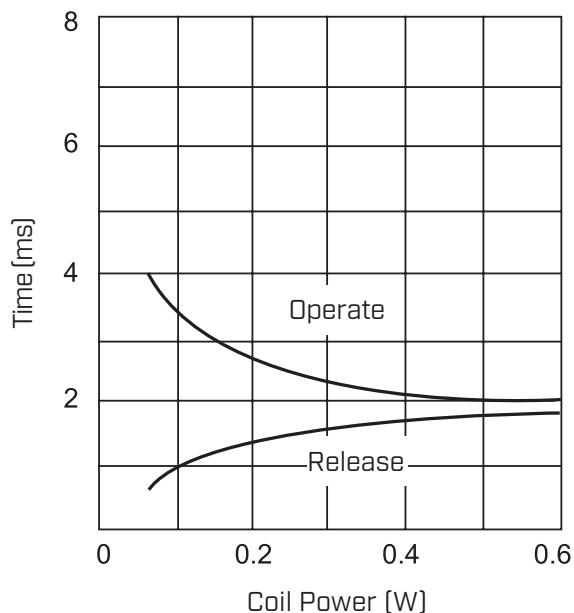


Coil Temperature Rise

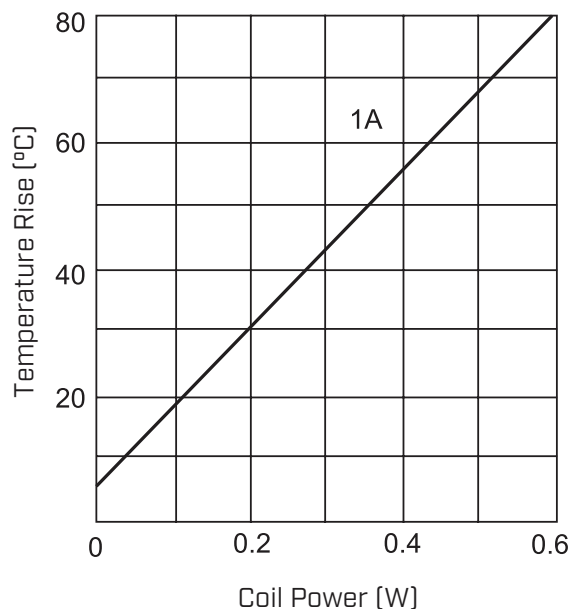

Life Curve

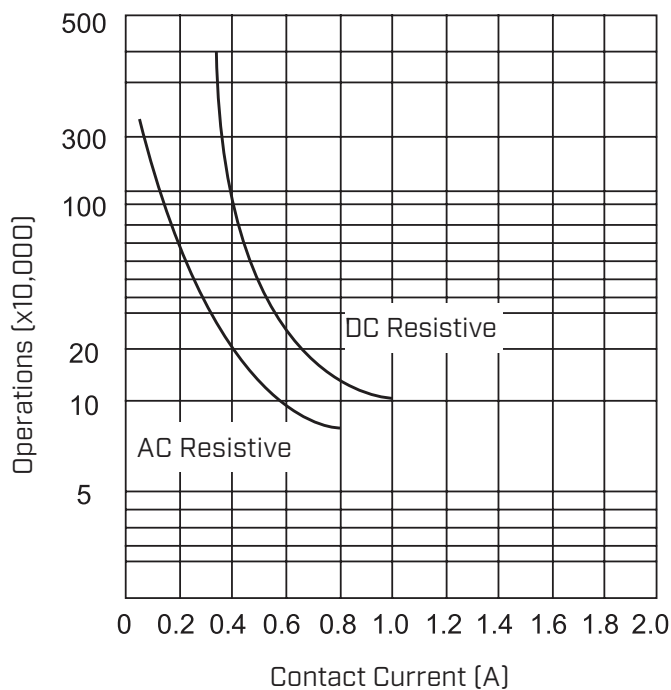

Maximum Switching Power

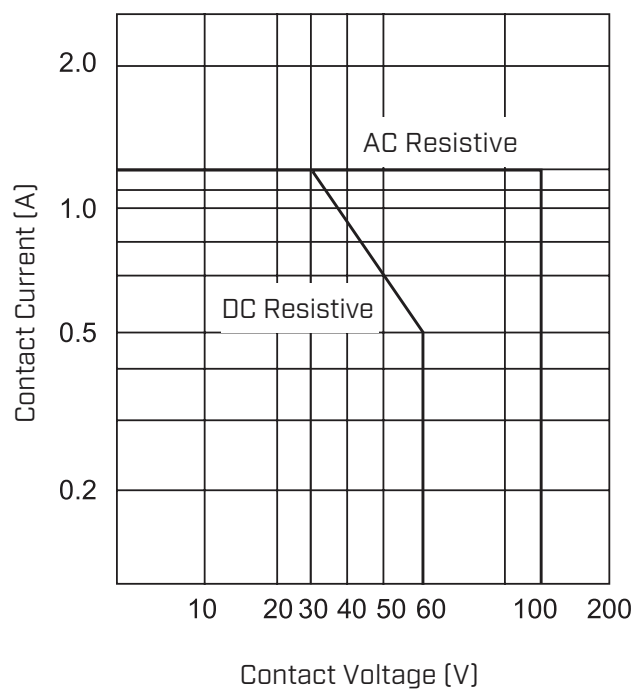

REVISION HISTORY

| rev. | description | date |
|------|-----------------|------------|
| 1.0 | initial release | 06/07/2022 |

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.