




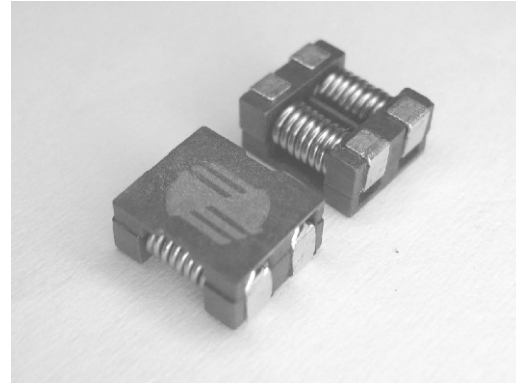




-  Common mode impedance surpasses 300Ω and 700Ω at 100MHz.
-  Applicable for the miniaturization required to reduce the size and weight of portable equipment.
-  Rated voltage up to: 57V.
-  Operating temperature: -25°C to +85°C.
-  RoHS compliant.





ELECTRICAL SPECIFICATION @ 25°C

Part Number	Impedance at 100MHz (Ω Min) ¹	Impedance at 100MHz (Ω Typ)	DCR (mΩ Max)	Rated Current Idc (A Max)	Insulation Resistance (MΩ Min)	Rated Voltage Edc (V Max)	Marking (32-xxx)
832-00550F	225	300	10	5	10	50	32-550
832-00541F	500	700	15	4	10	57	32-541

Notes:


1. Inductance is measured at 100MHz.
2. The part temperature (ambient temperature + temperature rise) should not exceed the upper limit of the operating temperature under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

TYPICAL IMPEDANCE CURVES

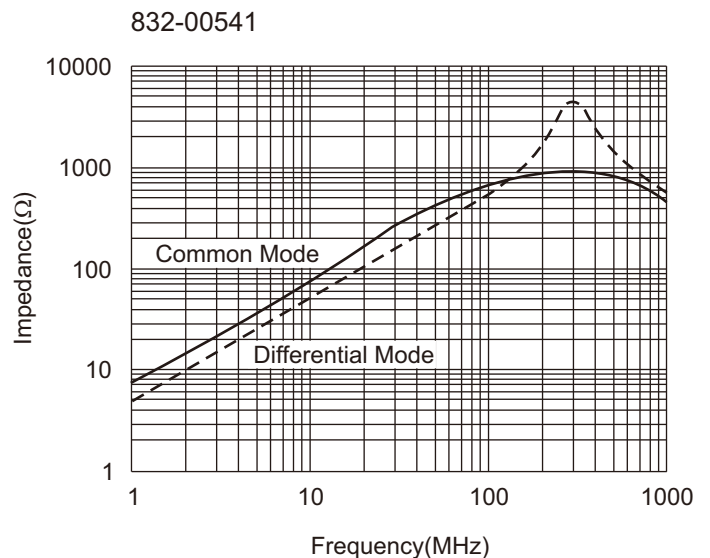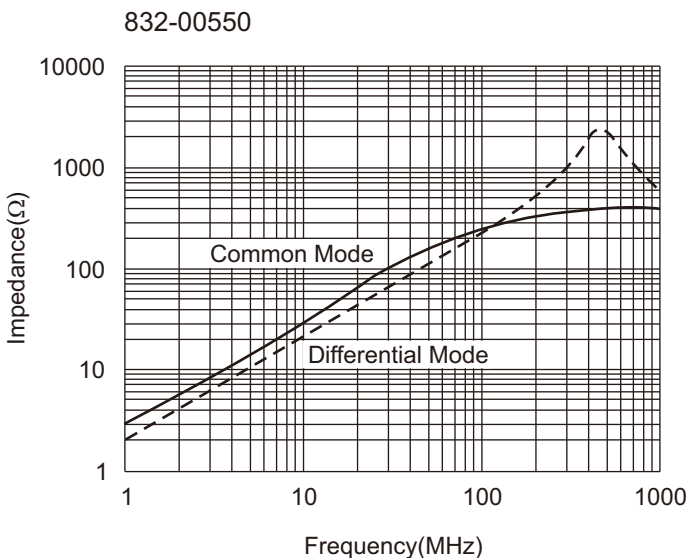




MECHANICAL DIMENSIONS

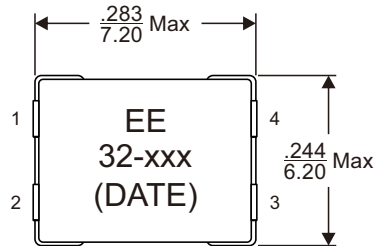

Gauge Plan or Reference Plane

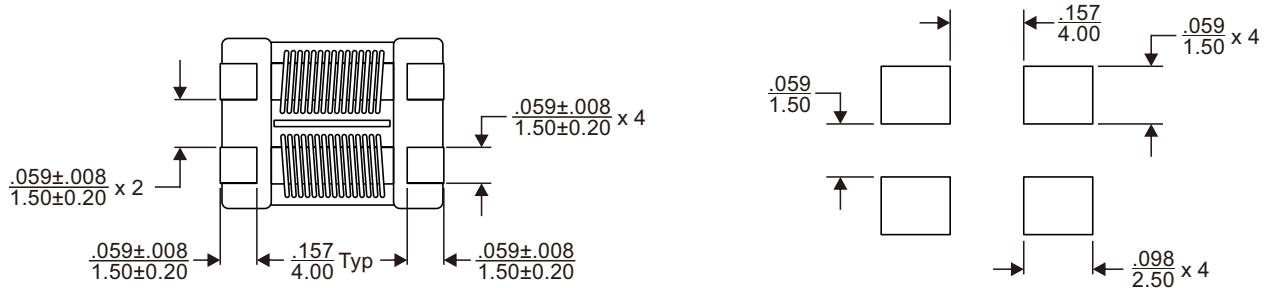


Recommended Pad Layout

Notes:

- 3. All dimensions are specified in inches with higher precedence in mm.
- 4. Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$.

Weight (in gram)	: 3.15 typ.
Tape & Reel	: 2000 / reel

SCHEMATICS



FOR MORE INFORMATION, PLEASE CONTACT

HEADQUARTER
FLAT G, 5/F, Valiant Industrial Centre,
2-12 Au Pui Wan Street, Fotan, N.T.
Hong Kong
Tel: (8620) 8221 4480 Fax: (852) 2954 3304
Email: eempl@eleceltek.com
Website: <http://www.eleceltek.com> / www.eemagnetic.com

Information herein is for reference only and subject to change without notice. It does not constitute any representation, warranty or commitment of the company in respect of the products in any aspect. All logos, brands and product names mentioned herein are trademarks or registered trademarks of their respective owners. The company does not assume any liability arising out of the application or use of any product or circuit described herein. Copyrights 2009, E & E Magnetic Products Limited.