


ISDN "U" INTERFACE TRANSFORMERS
0559-5683-00

TM0047


Bel introduces a new ISDN "U" Interface transformer.

* Dielectric Strength - 1000 Vrms measured Primary to Secondary.

MECHANICALS


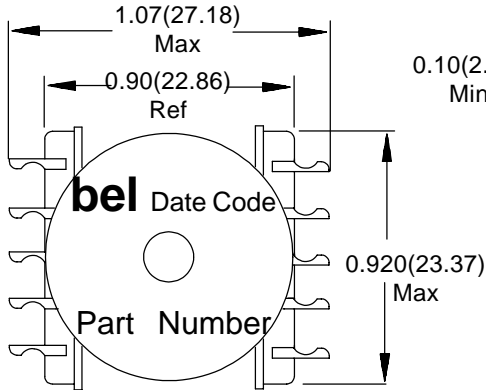


True Position Grid
(P.C. Pattern, Component Side)

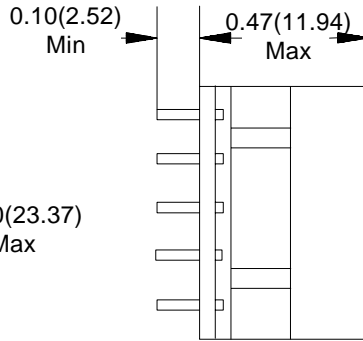


Dimensions in inches (mm)
Dimension tolerance +/- 0.015(0.25)
unless otherwise stated

PLACEMENT

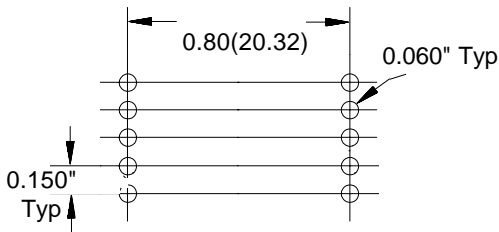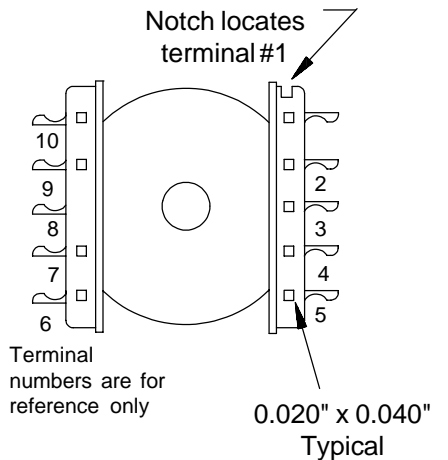

SCHEMATIC

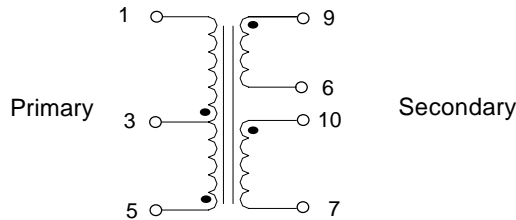

ELECTRICALS @ 25°C

Part Number	Turns Ratio (+/- 1%)	Secondary Inductance (mH) Min-Max	Leakage Inductance (μH) Max	DCR (Ω) +/- 10%		DC in Primary (mA) Max
	Primary to Secondary	Pins (7-9) tie Pins (6 to 10)	Pins (4-7 to 6 to 10) Pins (1-5) Shorted	Pins (1-5)	Pins (7-9)	
0559-5683-00	1:1.5	77-86	100-172	19.8	15.7	30

Primary Inductance is measured at 100mV @ 1kHz, 30mADC. Leakage Inductance is measured at 100kHz, 0.01VAC.

Corporate Office
Bel Fuse Inc.
198 Van Vorst Street, Jersey City, NJ 07302-4496
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: BelFuse@belfuse.com
Internet: http://www.belfuse.com

Far East Office
Bel Fuse Ltd.
8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office
Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K.
Tel: 44-1772-556601
Fax: 44-1772-888366