PKL3101

P-Ch 30V Fast Switching MOSFETs

★ 100% EAS Guaranteed
★ Green Device Available
★ Super Low Gate Charge
★ Excellent CdV/dt effect decline
★ Advanced high cell density Trench technology

Product Summary


BVDSS	RDSON	ID
-30V	52mΩ	-4.5A


Description

The PKL3101 is the high cell density trenched P-ch MOSFETs, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.

The PKL3101 meet the RoHS and Green Product requirement, 100% EAS guaranteed with full function reliability approved.

SOT223 Pin Configuration





Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-30	V
V_{GS}	Gate-Source Voltage	±20	V
I_D@T_A=25°C	Continuous Drain Current, V_{GS} @ -10V[1]	-4.5	A
I_D@T_A=70°C	Continuous Drain Current, V_{GS} @ -10V[1]	-3.5	A
I_{DM}	Pulsed Drain Current[2]	-23	A
P_D@T_A=25°C	Total Power Dissipation[3]	1.5	W
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient [1]	---	85	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-Case[1]	---	48	°C/W

Electrical Characteristics (T_J=25 ˚C, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V , I_D=-250uA	-30	---	---	V
$\triangle BV_{DSS}/\triangle T_J$	BV_{DSS} Temperature Coefficient	Reference to 25˚C , I_D=-1mA	---	-0.023	---	V/˚C
$R_{DS(ON)}$	Static Drain-Source On-Resistance[2]	V_{GS}=-10V , I_D=-4A	---	42	52	mΩ
		V_{GS}=-4.5V , I_D=-3A	---	75	90	
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS}=V_{DS} , I_D =-250uA	-1.2	-1.6	-2.5	V
$\triangle V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	4	---	mV/˚C
I_{DSS}	Drain-Source Leakage Current	V_{DS}=-24V , V_{GS}=0V , T_J=25˚C	---	---	-1	uA
		V_{DS}=-24V , V_{GS}=0V , T_J=55˚C	---	---	-5	
I_{GSS}	Gate-Source Leakage Current	V_{GS}=±20V , V_{DS}=0V	---	---	±100	nA
gfs	Forward Transconductance	V_{DS}=-5V , I_D=-4A	---	11	---	S
Q_g	Total Gate Charge (-4.5V)	V_{DS}=-15V , V_{GS}=-4.5V , I_D=-4A	---	6.4	9.0	nC
Q_{gs}	Gate-Source Charge		---	2.3	3.2	
Q_{gd}	Gate-Drain Charge		---	1.9	2.7	
$T_{d(on)}$	Turn-On Delay Time	V_{DD}=-15V , V_{GS}=-10V , R_G=3.3Ω, I_D=-4A	---	2.8	5.6	ns
T_r	Rise Time		---	8.4	15.1	
$T_{d(off)}$	Turn-Off Delay Time		---	39	78.0	
T_f	Fall Time		---	6	12.0	
C_{iss}	Input Capacitance	V_{DS}=-15V , V_{GS}=0V , f=1MHz	---	583	816	pF
C_{oss}	Output Capacitance		---	100	140	
C_{rss}	Reverse Transfer Capacitance		---	80	112	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current[1,4]	V_G=V_D=0V , Force Current	---	---	-4.5	A
I_{SM}	Pulsed Source Current[2,4]		---	---	-23	A
V_{SD}	Diode Forward Voltage[2]	V_{GS}=0V , I_S=-1A , T_J=25˚C	---	---	-1.2	V
t_{rr}	Reverse Recovery Time	I_F=-4A , dI/dt=100A/μs , T_J=25˚C	---	7.8	---	nS
Q_{rr}	Reverse Recovery Charge		---	2.5	---	nC

Note :
1.The data tested by surface mounted on a 1 inch^2 FR-4 board with 2OZ copper.
2.The data tested by pulsed , pulse width ≦ 300us , duty cycle ≦ 2%
3.The power dissipation is limited by 150˚C junction temperature
4.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

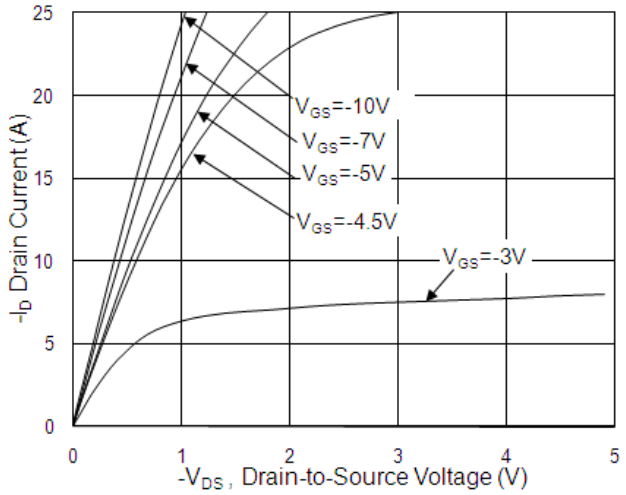


Fig.1 Typical Output Characteristics

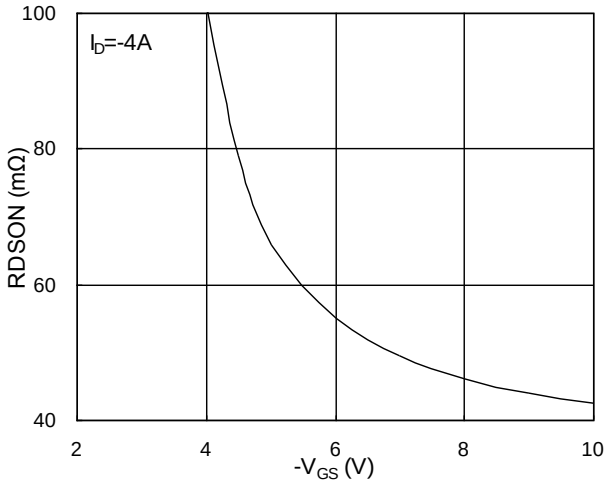


Fig.2 On-Resistance v.s Gate-Source

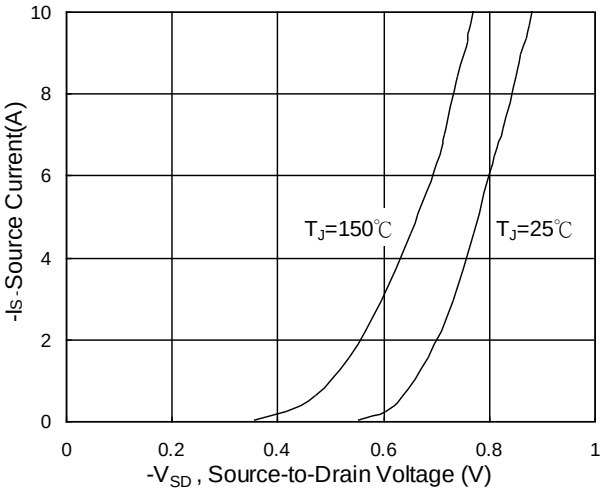


Fig.3 Forward Characteristics Of Reverse

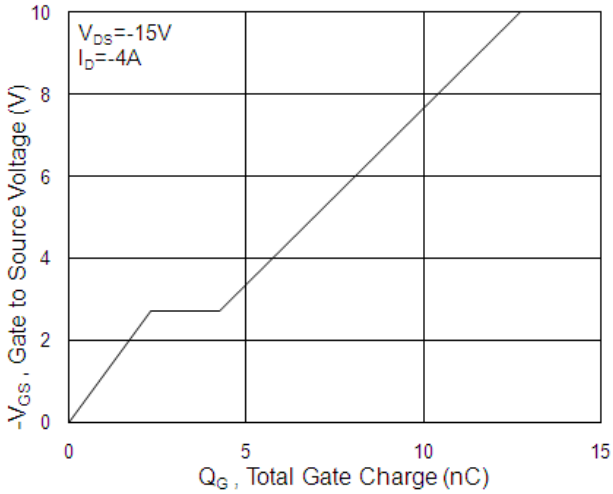


Fig.4 Gate Charge Characteristics

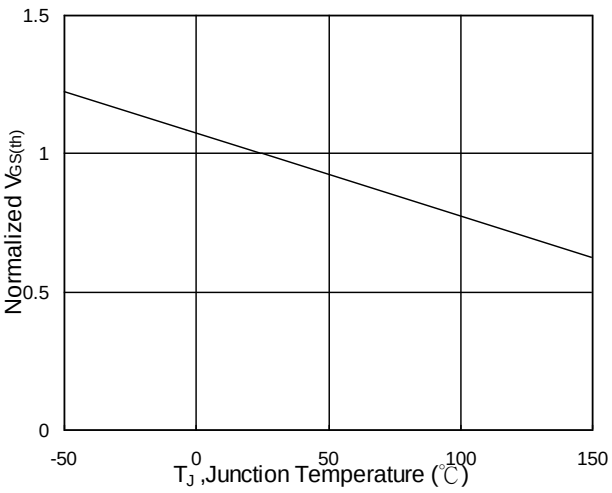


Fig.5 Normalized $V_{GS(th)}$ v.s T_J

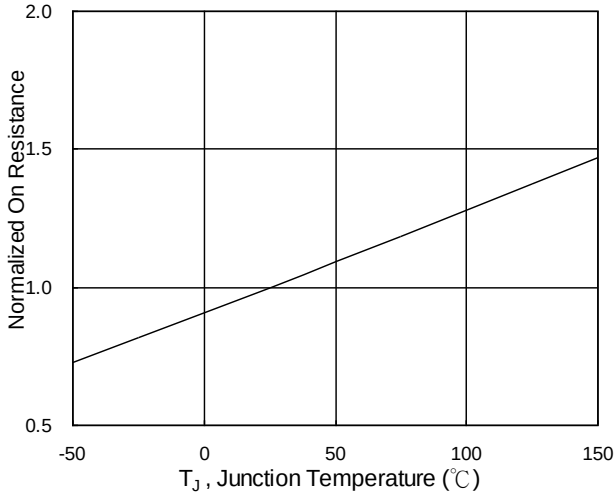


Fig.6 Normalized R_{DSON} v.s T_J

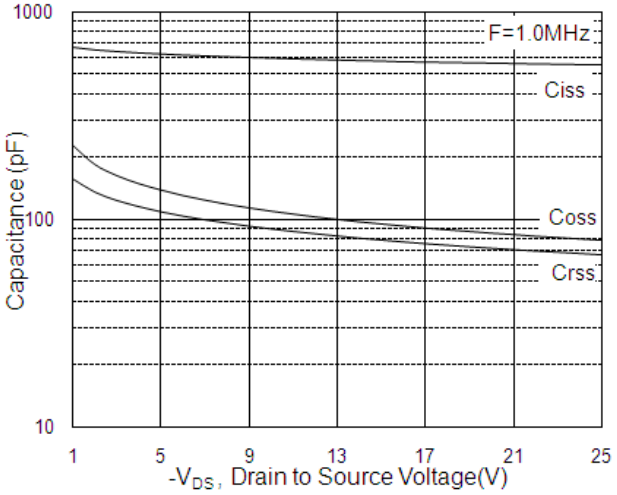


Fig.7 Capacitance

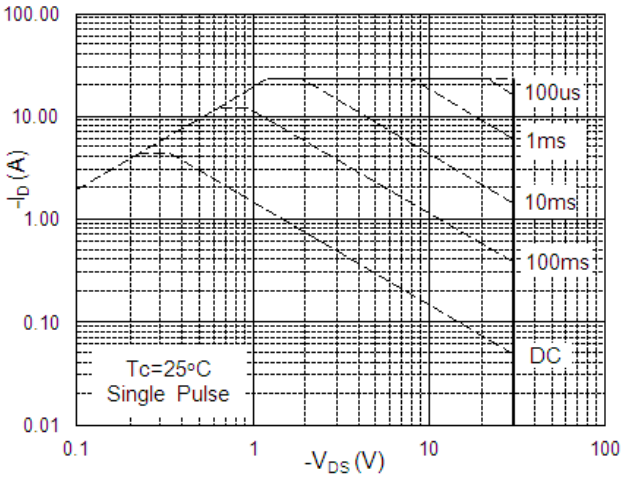


Fig.8 Safe Operating Area

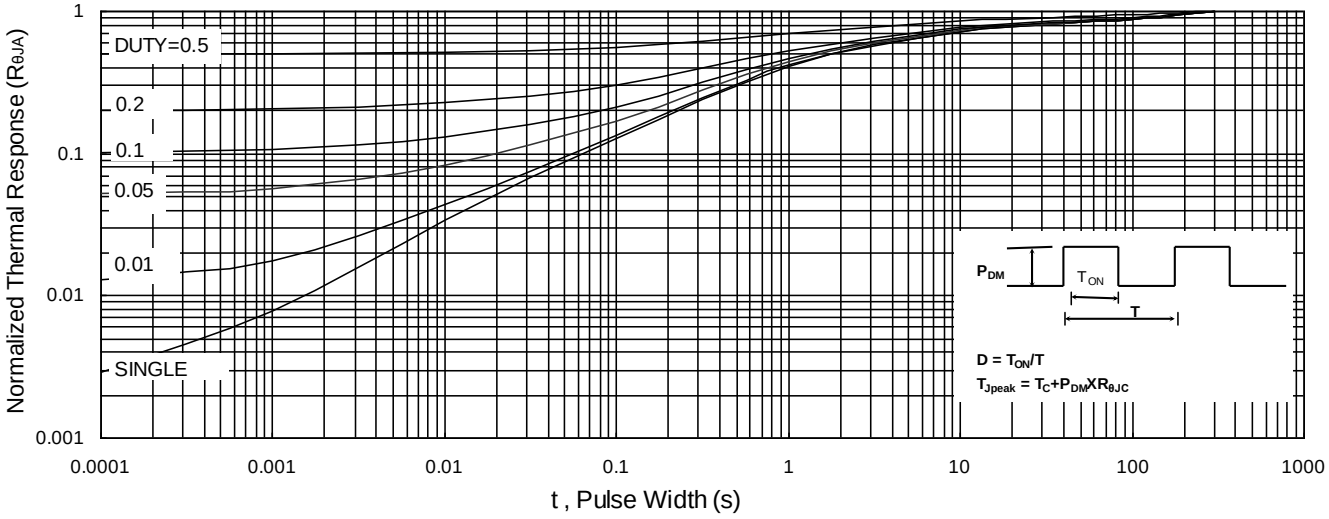


Fig.9 Normalized Maximum Transient Thermal Impedance

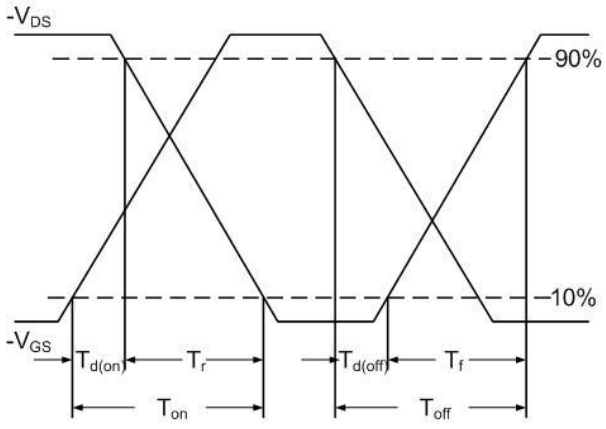


Fig.10 Switching Time Waveform


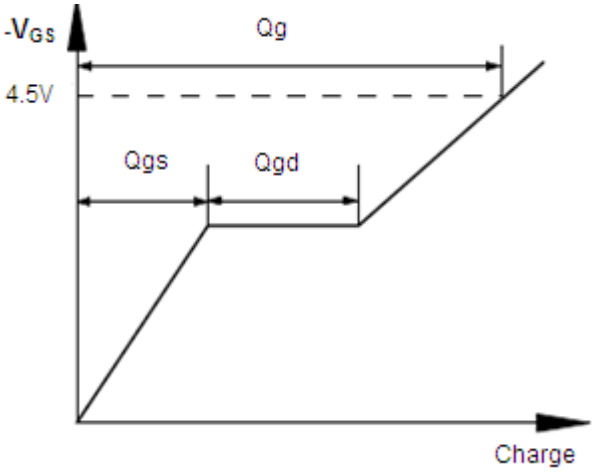


Fig.11 Gate Charge Waveform

Package Information (SOT-223)

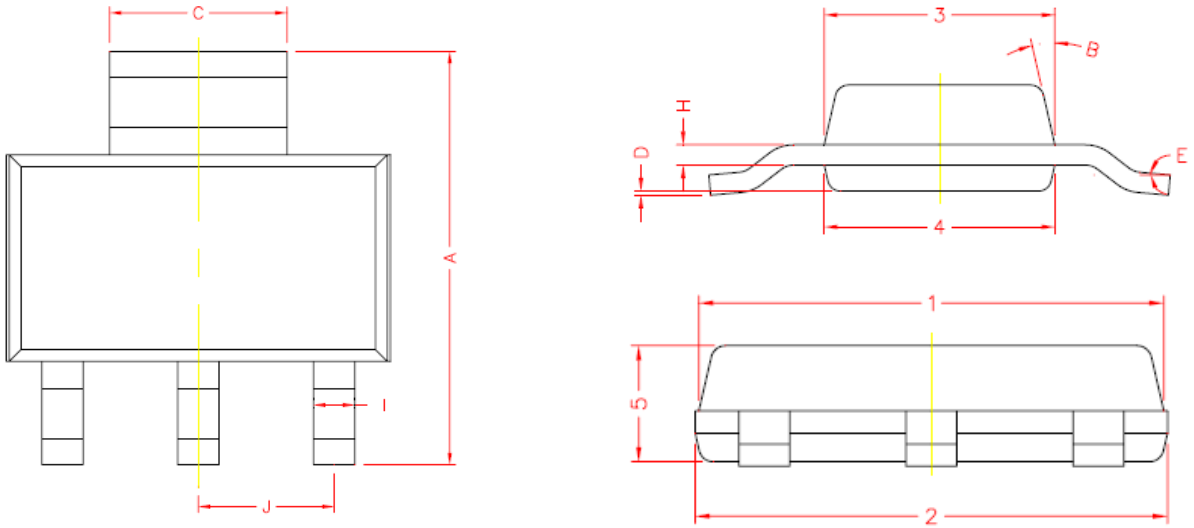

REF.	DIMENSIONS	
	Millimeters	
	Min.	Max.
A	6.70	7.30
C	2.90	3.10
D	0.02	0.10
E	0°	10°
I	0.60	0.80
H	0.25	0.35
B	13° TYP.	
J	2.30 REF.	
1	6.30	6.70
2	6.30	6.70
3	3.30	3.70
4	3.30	3.70
5	1.40	1.80