

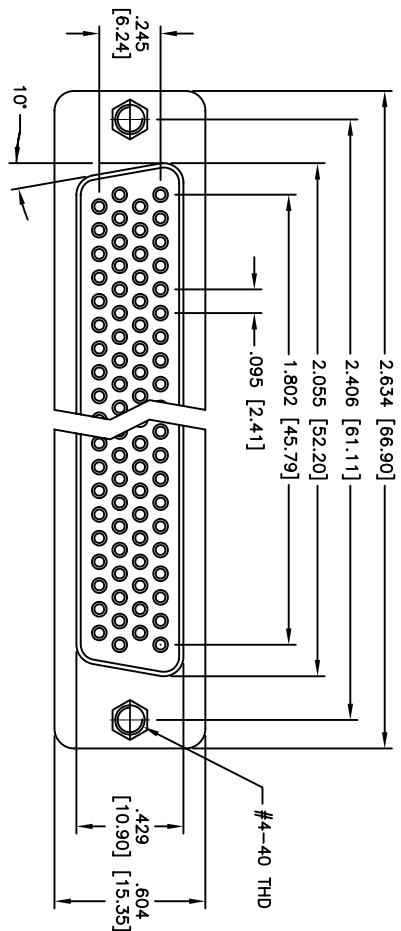



Rev	AWO #	Description	Date	Appr
-		RELEASED	6/4/07	

APPROVED: _____
 DATE: _____ TITLE: _____

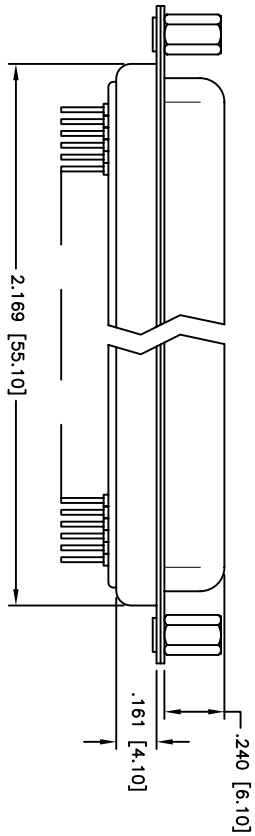

RECOMMENDED
PCB LAYOUT

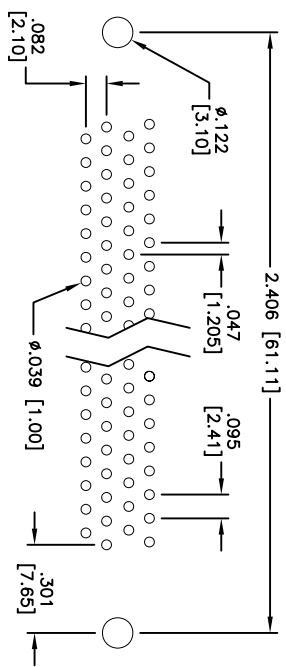

SPECIFICATIONS:

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Shell: Steel, Tin plated
- Plating: Gold flash over Nickel underplate overall
- Electrical: Operating voltage: 250 VAC max
- Current rating: 5 Amps max
- Contact resistance: 20 mohms max
- Insulation resistance: 5,000 Mohms min
- Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -65°C to +125°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 78 POS. HIGH DENSITY D-SUB SOCKET
 PCB TAILS, #4-40 RIVITED JACKSCREW

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ϕ X	± .10
.XX	± .020	ϕ XX	± .015
.XXX	± .015	ϕ XXX	± .010
APPROVALS		DATE	
DRAWN	SS	6/4/07	
CHECKED			
APPROVED			

SIZE	PART NO.	REV.
X	HD178-ST-JS	-
REF:	SCALE: NTS	SHEET 1 OF 1