
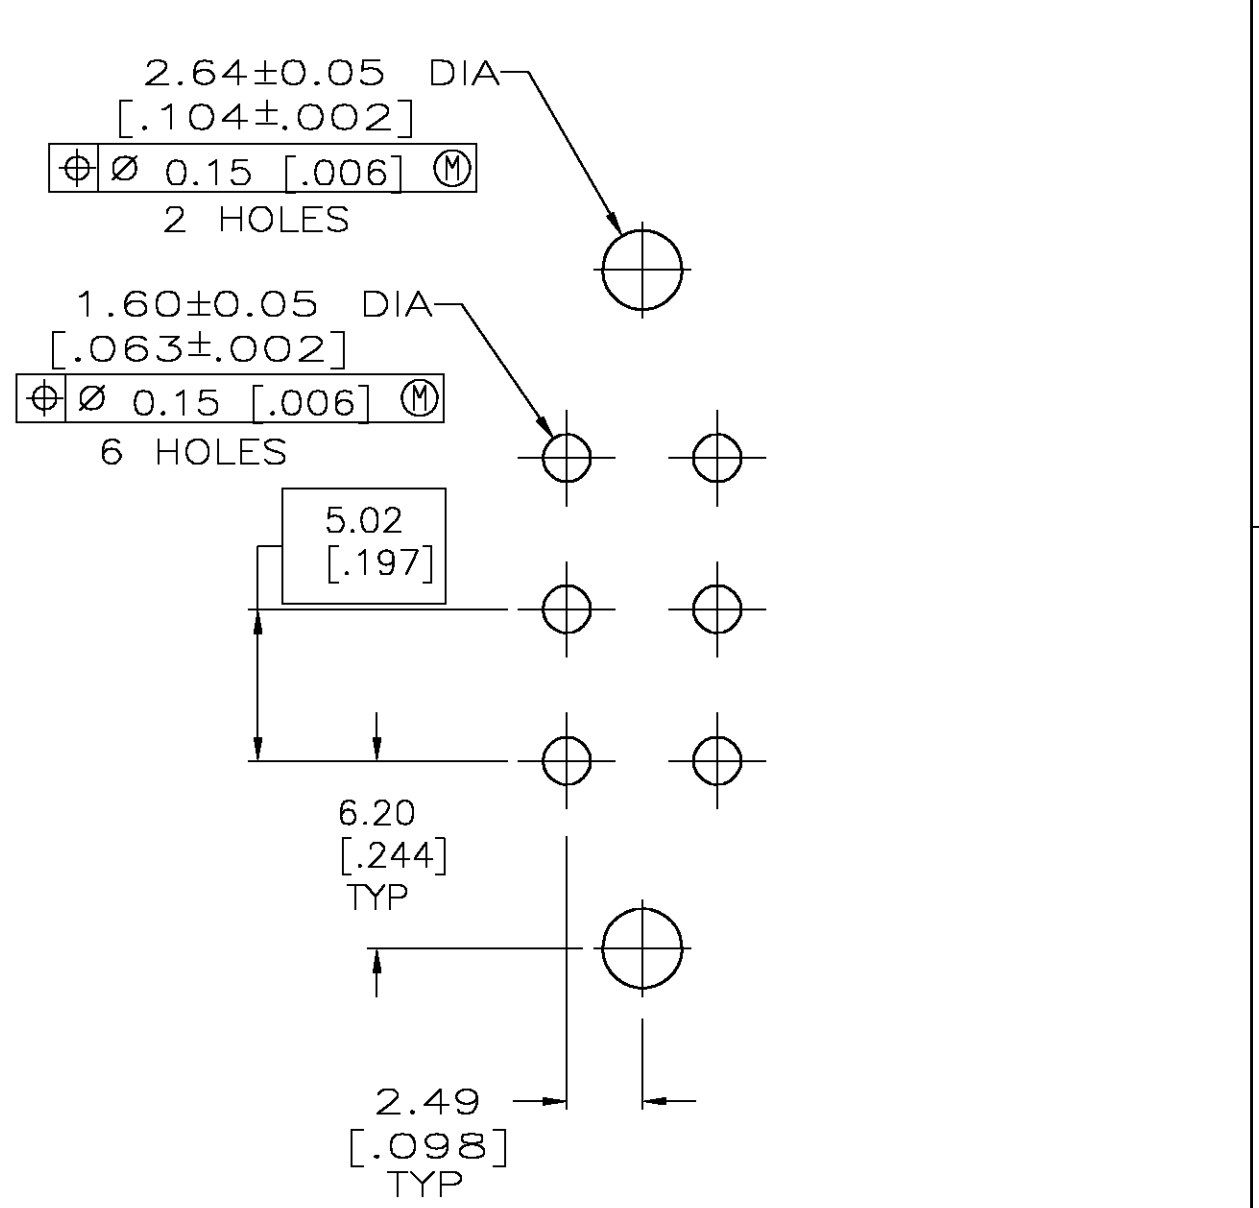


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
FT	0		U	REVISED PER 0G3B-0164-05	5/8/05	SS

APVD	GS
------	----

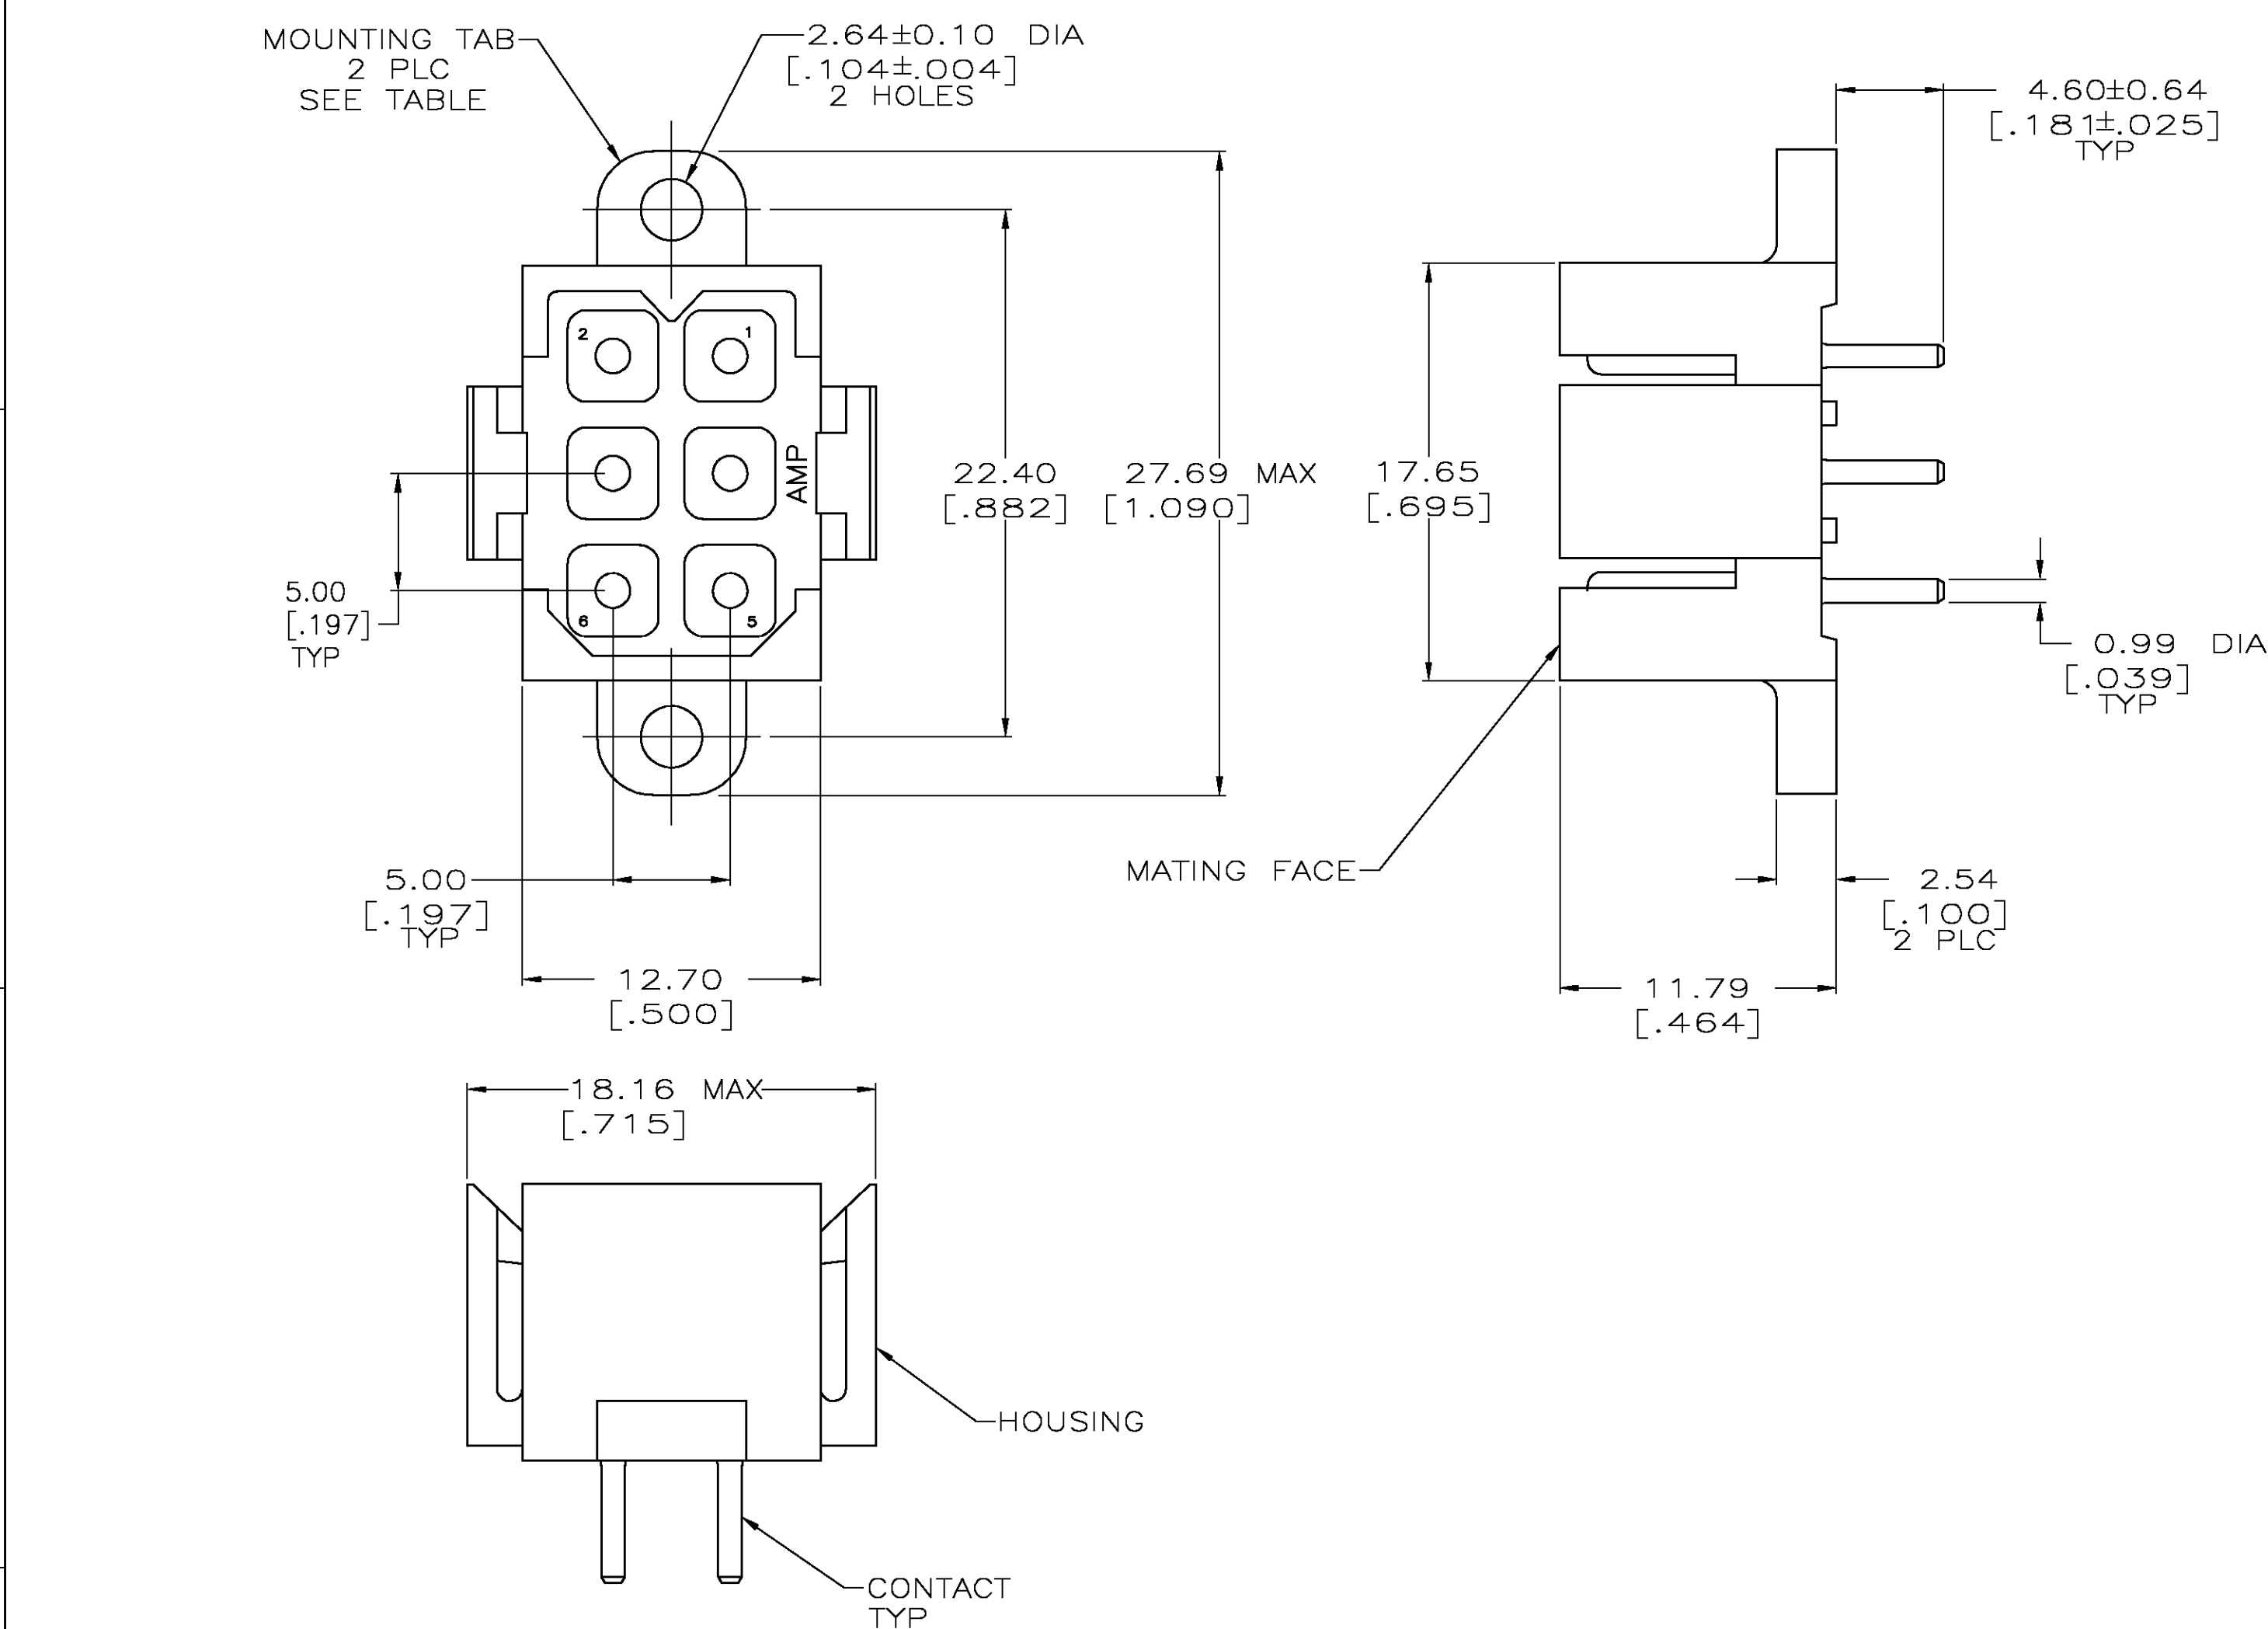

1 NYLON, UL 94V-0 RATED, RED.
2 BRASS PER ASTM B36.
3 3.81µm [.000150] MIN TIN OVER 2.54µm [.000100] MIN COPPER.
4 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81µm [.000150] MIN TIN FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
5 .000150 MIN TIN OVER .000100 MIN CU, OR .000050 MIN NICKEL.

6 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81µm [.000150] MIN TIN FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.

6	NO	1-207158-1
6	YES	1-207158-0
5	NO	207158-8
5	YES	207158-7
4	NO	207158-4
4	YES	207158-3
3	NO	207158-2
3	YES	207158-1
CONTACT FINISH		MOUNTING TABS
CONTACT FINISH		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03/10/92	Tyco Electronics Corporation	
DIMENSIONS:		CHK	3-17-92	Harrisburg, Pa 17105-3608	
mm [INCHES]		R.STONE		NAME	
		APVD	3-17-92	PIN HEADER ASSEMBLY, 6 POSITION, METRIMATE	
		PRODUCT SPEC			
		108-10033			
		APPLICATION SPEC			
MATERIAL		FINISH	WEIGHT	SIZE	CAGE CODE
HOUSING: 1		CONTACT: SEE TABLE	-	A2	00779
				SCALE	4:1
				SHEET	1 OF 1
				REV	U